

Specification AD/CV95/Issue 4. Dated 14.11.46. To be read in conjunction with K1001, ignoring clause :- 5.8.	<u>SECURITY</u>	
	<u>Specn.</u>	<u>Valve</u>
	Restricted	Unclassified

<u>TYPE OF VALVE:-</u> Tungsten Filament Bolometer Indicator. <u>CATHODE:-</u> None. <u>ENVELOPE:-</u> Glass. <u>PROTOTYPE:-</u> R3/10.	<u>MARKING</u>
	See K1001/4.

<u>RATING</u>	Note	<u>BASE AND CONNECTIONS</u>
Cold resistance. (ohms)	6.5	See Fig. 1.
Wattage dissipation when just glowing (approx.) (mW)	8	<u>DIMENSIONS</u>
		See Fig. 1.
		<u>PACKING PACKAGING</u>
		See K1001/7. SEE K1005

NOTE

A. The indicator is to be degassed and evacuated so that it may be operated in R.F. fields without the ionisation glow caused by the presence of gas.

TESTS

To be performed in addition to those applicable in K1001.

	Test Conditions	Test	Limits		No. Tested	Note
	Total Bridge Current (mA)		Min.	Max.		
a	4	Resistance (ohms)	5.89	7.2	100%	2
b	7	Change in resistance from value in test 'a' (ohms)	0.09	-	100%	1 2

NOTES

1. This test is based on the Pirani Effect and is designed to reject leaking indicators.
2. The valve is to be tested in the bridge circuit shown in Fig. 2.
3. The ambient temperature is to be 20°C approx.

FIG. 1.

FILAMENT WIRE DIAMETER (NOMINAL) : 0.01 MMS.
 " " " LENGTH : 8.0 MMS.
 DIMENSIONS OF TAG ATTACHED TO LEADS AND MICA : 1.7x2.3 MMS.
 (SEE FIG. 1A) WITHIN $\pm 5\%$
 FILAMENT LEADS TO BE NOT LESS THAN 3CMS. LONG.
 ALL DIMENSIONS IN MILLIMETRES.

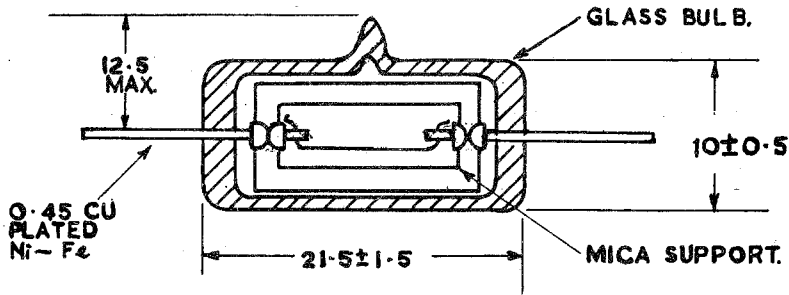


FIG. 1A
 PART VIEW
 SHOWING TAG DIMENSIONS.






FIG. 2.

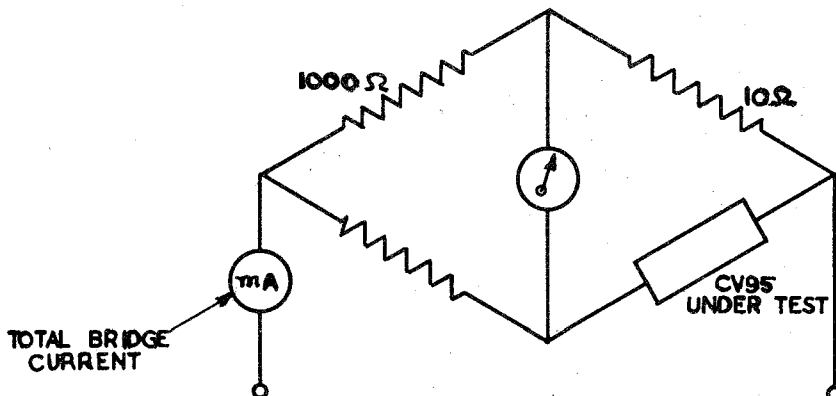

GIVEN FOR INFORMATION OF EQUIPMENT DESIGNERS & NOT SUBJECT TO ACCEPTANCE TESTING.

CHARACTERISTIC CURVE.

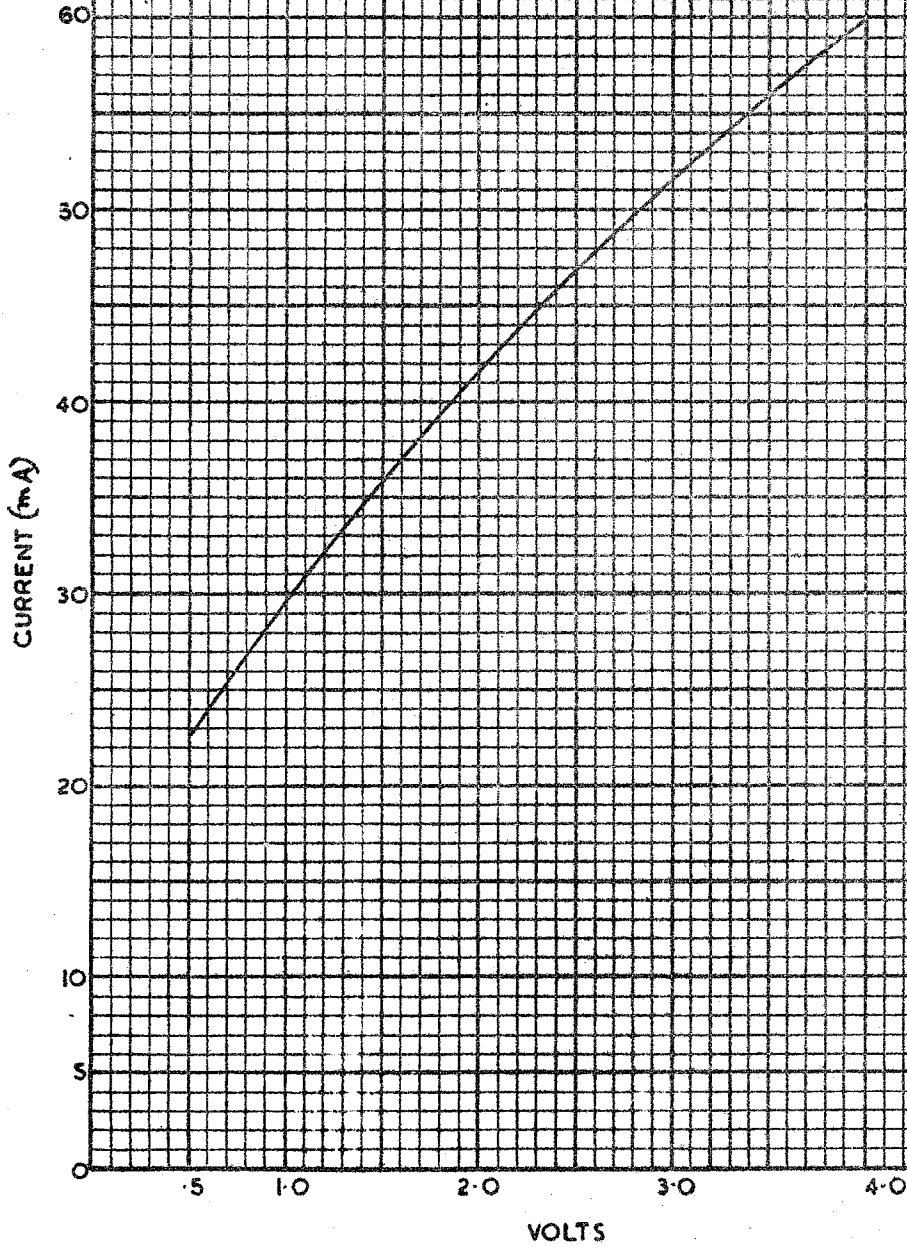

GIVEN FOR INFORMATION OF EQUIPMENT DESIGNERS AND NOT SUBJECT TO ACCEPTANCE TESTING.

