Specification MOA/CV2416	SECURITY		
Issue 3, Dated 8th July, 1963	<u>Specification</u>	<u>Valve</u>	
To be read in conjunction with K1006	Unclassified	Unclassified	

TYPE OF VALVE - Tetrode Pulse Amplif CATHODE - Indirectly-heated ENVELOPE - Glass PROTOTYPE - C11111 RATING	Pier		Cer		1/4	7.
Heater Voltage Heater Current Max. Peak Forward Anode Voltage(kV) Max. Anode Supply Voltage (kV) Max. Peak Anode Current (A) Max. Peak Forward Grid Voltage (V) Max. Grid Reverse Voltage (V) Max. Screen Grid Voltage (kV) Max. Anode Dissipation (W) Max. Screen Grid Dissipation (W) Min. Cathode Heating-time (secs) Max. Seal Temperature (°C) CAPACITANCES (pF) Cag (max.) Cin (nom.) Cout (nom.)	26.0±10% 2.15 25.0 20.0 18 300 -1000 1.5 60 8.0 180 200	Note B	Pin 1 2 3 4 TC See dr	He So Co He Ca Ar POP CA Pawing OIMENS Outling ins)	SIONS ne on Page Min. 5 11/32	id rid
			<u>M</u>	I TRUUOI	ING POSI	<u>rion</u>

(204685)

CV2416

- A. All limiting values are absolute
- B. The Duty Cycle should not exceed 0.001. For peak currents exceeding 5.0A the product of peak current in amperes and pulse duration in microseconds should not exceed 40 and the valve should not be operated for longer than 5 usecs in any 100-usec. interval. For peak currents not exceeding 5.0A the anode dissipation of 60W shall determine the permissible pulse length. At higher duty cycles the peak current must be reduced in proportion. In applications where the peak current drawn is less than the maximum rating, the heating-time may be reduced proportionately. In no circumstances however, should it be less than 60 secs.

The screen grid decoupling series resistance shall be 20,000 ohms min.

C. JOINT SERVICES CATALOGUE NUMBER - 5960-99-000-2416.

TESTS

To be carried out in addition to those applicable in K1006

K1006	Test or Operation Conditions		LIMITS		Units
Ref.	rest of operation	VOMETUTORS	Min.	Max.	Onics
	GROUP A The tests in this group to be carried out in the order stated.	Tests in this group to be carried out on all valves.			
4.5	Holding period	No voltages	168	-	hours
4.10.23	Pulse Operation (1)	Notes 1 and 2 iL AiL Ig 1		- 0.75 r nega	Amp Amp tive
4.10.23	Pulse Operation (2)	Notes 1 and 3 iL △iL	15 -	- 0•75	Amps Amps
4.10.23	Pulse Operation (3)	Notes 1 and 4 iL △iL	20	1.25	Amps Amps
4.10.23	Pulse Operation (4)	Notes 1 and 5 iL △iL	20	1.5	Amps
4.10.23	Pulse Operation (5)	Notes 1 and 6 Screen grid current Ig2 Control grid current Ig 1		r nega r nega	
4.10.6.1	Total Grid 1 Current(1)	Adjust grid 1 voltage to give anode current of 50 mAdc Notes 7, 8	0	-20	uAdo
4.10.6.2	Total Grid 1 Current(2)	Grid 1 = -500 wolts dc w.r.t. Cathode Note 8	0	-40	uAdc

Page 3		TESTS (Cont. a)	CV	24	10	
K1006	Test or Operation	Conditions	LIM	ITS	Units	
Ref.	1650 Of Operation	JOINE STORE	Min.	Max.	UILUS	
	GROUP A Cont'd.					
4.10.5.2	Grid 1 woltage	Adjust grid 1 voltage to give anode current of 50 mAdc. Note 8	-1 90	- 250	Volts dc	
4.10.5.2	Grid 1 cut-off	Adjust grid 1 voltage to give anode current of 1.0 mAdc. Note 8	-	-350	Volts dc	
4.10.6.6	Primary screen-grid emission	Applied circuit voltage 750V rms. 50-60 c/s. Grid voltage = 0. Screen gallman forward current 100mA. Note 9	-	250	µAdc	Arnoll-1
4.10.6.6	Primary grid 1 emission	Applied circuit voltage 110V rms 50-60 c/s. Screen grid voltage = 0. Grid 1 mean forward current 65mA. Note 9	-	100	uAdc	
4.10.1.3	Peak emission	Grid 1 screen grid and anode connected together to 1000 volts. Heater voltage = 27 volts rms.	70	-	Amps	
4.10.8	Heater Current	Heater voltage = 27 volts rms.	1.95	2.35	Amps	
	Groups B,C,D	No tests				
	Group E	Mechanical tests.				
4-1-1-2		Each test to be carried out at a sample inspection level IA with an ACL = 6.5%				
	Torque	No voltages. Note 12				
	Shock	Heater = 27 volts rms Hammer angle = 13°				
	Post Torque & Shock Vibration	Tube must pass all Group A tests, same limits Note 11	See 1	Note 1		
	Group F	Life tests		T		
4.11	Pulse life test (1)	Group C I.I.E.T. Notes 1, 13, 14.	500		Hours	
	Pulse life test end point	Pulse operation tests (3) and (4) iL Grid 1 emission could (1) Peak emission Primary screen grid emission	19 - - 70 -	1.5 400 - 250	Amps Amps uAdc Amps uAdc	Andt 1

K1006	Test or Operation	Condition o		LI	Thu d A	
Ref.		Conditions	Conditions		Max.	Units
	GROUP H	Qualification Approval Tests				
4.10.14	Capacitances		Cgp Cin Cout	- 35 6	2 50 11	hht hht
4.9.20.3	Vibration	Notes 15, 76				
4. 9.20.9	VIDIATION	Microphony			1.5 total	Volts

Andt 1

NOTES

1. The tube shall be tested in the circuit of figure 1, at a recurrence frequency of 300-500 pps, the exact frequency at the discretion of the manufacturer.

The grid 1 driver pulse shall have a duration of 2 µs minimum, measured at the 9% level of the maximum amplitude. The time of rise shall be less than 0.2 µsec, and the time of fall shall be less than 0.4 µsecs. The variation in amplitude over 80% of the top portion of the pulse shall not exceed % total.

The control grid shall be driven positive to 225 + 25 volts.

A suitable relay shall be shunted to operate at 200mA and used in conjunction with an AC contactor to break the AC supply to the anode voltage power unit approximately 20 milliseconds after the relay has operated. A device shall be incorporated into the relay circuit which will delay the reapplication of anode voltage for a minimum period of 15 seconds after each kick-out, and shall count the number of kick-outs.

- 2. This shall be the first test after the holding period. Heater voltage = 26 volts rms, tube heating time = 180 secs minimum, anode supply voltage = 20 kVdc. screen grid supply voltage = 1.25 kVdc.
- 3. With the valve running for pulse operation (1), reduce heater to 24 volts rms and observe test parameters after two minutes.
- 4. With the valve running for pulse operation (2) test, increase heater to 26 volts rms, anode supply voltage to 25 kVdc, screen grid supply voltage to 1.35 kVdc, allow 120 seconds to reach equilibrium before observing test parameters. The valve shall run for any two consecutive minutes during a test period of five minutes without sparking.
- 5. With valve running for pulse operation (3) test decrease heater to 24 volts r.m.s. and allow 120 seconds minimum to reach equilibrium before observing test parameters. After restoring the heater voltage to 26 velts and allowing 120 seconds to again reach equilibrium the valve shall run for any two consecutive minutes during a further test period of five minutes maximum without sparking.

Andir

- 6. With valve running as at end of pulse operation (4) test decrease anode supply voltage to 20 kVdc and screen grid voltage to 1.25 kVdc.
- 7. Tube to operate with constant or decreasing grid current for two minutes. If the tube should operate with a rise of grid current, the grid current shall become constant or decrease within five minutes.
- 8. With anode voltage = 1.2kVdc, screen grid voltage = 1.0kVdc, with respect to cathode. Heater voltage = 27 volts rms, tube heating time 300 secs min.
- 9. With the specified voltage applied to a suitable rectifier circuit, adjust a variable series resistor to give the specified mean forward current. Heater voltage = 27 volts rms., anode floating. Reverse current must not exceed the stated limit after 15 seconds.
- 10. There shall be no short circuits between the electrodes. A short circuit is defined for this purpose as a current in grid 1 exceeding 0.3 mA, or a current in the screen grid exceeding 1.7 mA. The circuit in fig. 2 may be used for this purpose, a short circuit is indicated by a flash from either of the neons which should be preset to ignite at these levels.
- 11. Heater = 26 volts rms, grid 1 voltage = 700 volts dc negative, screen grid voltage = 700 volts dc positive, anode not connected. Valve mounted vertically in valve holder. Vibrate once up and down at 5g acceleration between 30 and 1500 c/s at a sweep rate of 5 octaves per minute maximum. Check for short circuits with a mean or other approved sensitive detector. A suitable circuit is shown in fig.2.

And)

- 12. The base shall be subjected to a gradually applied torque of 12.0 pound-inches max. This test shall not cause broken leads, broken welds, broken soldered joints, broken or cracked glass.
- 13. Heater voltage = 25 volts rms, tube heating time = 180 secs maximum, anode supply voltage = 20 kVdc, screen supply voltage = 1.25 kVdc.
- 14. During the life test, any tube which will kick out the overcurrent relay more than 24 times in a 24 hour period shall be considered a failure.
- 15. Heater voltage = 24 volts dc, anode supply voltage = 250 volts dc, anode lead 2500 ± 5% ohms screen grid voltage = 90 volts dc. Adjust grid 1 voltage to give anode current of 5 mAdc. Microphony observed as a variation in potential at the anode shall not exceed the stated limit.



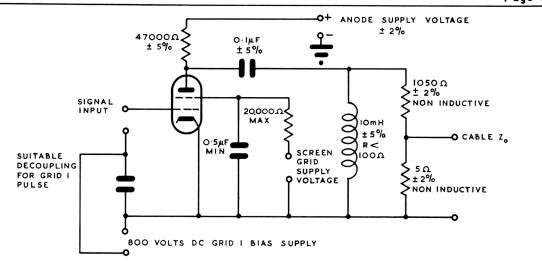


FIG. I CIRCUIT FOR OPERATION TEST

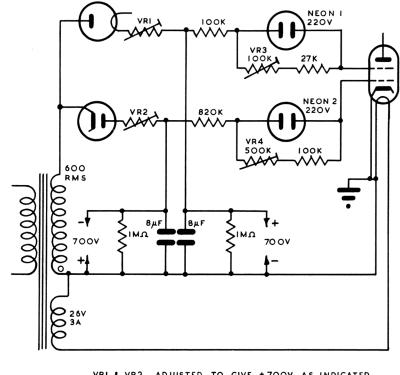

VRI & VR2 ADJUSTED TO GIVE ±700V AS INDICATED VR3 ADJUSTED TO IGNITE NEON I AT 192 I·7mA VR4 ADJUSTED TO IGNITE NEON 2 AT 191 300μA

FIG.2
SHORT CIRCUIT INDICATOR

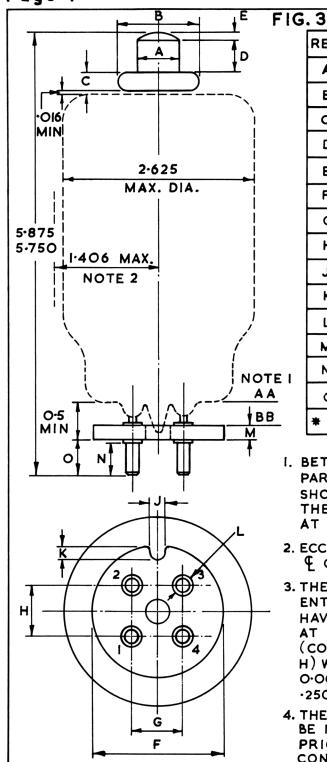

REF. DIMENSIONS IN INCHES A **O.566 ±.007 DIA.	
A * * 0.566 ± .007 DIA.	
B ** 18 DIA. NOM.	
C ** 4 NOM.	
D $**\frac{7}{16}$ MIN. STRAIGHT SIDE	
E * * 16 NOM.	
F ** 1.8005 ± .0125	
G ** ·687 NOM.	
H ## '687 NOM.	
J ##-187±-016	
K # # ·187 ± · O16	
L ** 187 DIA.± 004 (4 PINS)
M * * 3 NOM.	
N # # ·328 MIN. STRAIGHT	
0 * * ½ MAX.	
* FOR ALL OTHER DIMENSIONS	

- I. BETWEEN PLANES AA & BB NO PART OF THE BULB OUTLINE SHOULD OBSTRUCT THE USE OF THE LOCATING SLOT DIMENSIONED AT J & K & EXTEND OUTSIDE DIA. F.
- 2. ECCENTRICITY WITH RESPECT TO ¶ OF BASE.
- 3. THE BASE SHALL BE CAPABLE OF ENTERING A GAUGE A THICK HAVING 4 HOLES ·214 DIA. LOCATED AT TRUE POSITIONS TP O·687 (CORRESPONDING TO DIMENSIONS G, H) WITH POSITIONAL TOLERANCE O·0023 DIA. AND A CENTRE HOLE ·250 DIA.
- 4. THE FINISH ON THE BASE PINS SHALL BE NICKEL PLATED TO DTD.919A PRIOR TO SOLDERING OF THE CONNECTIONS.

ELECTRONIC VALVE SPECIFICATIONS

SPECIFICATION MOA/CV2416 ISSUE 3 DATED 8th JULY, 1963 AMENDMENT No.1

Page 3 K1006 Ref.4.10.6.6 Primary screen-grid emission

In the column headed "Conditions" amend the last sentence to read "Screen grid mean forward current 100mA".

Page 3 K1006 Ref.4.11 Pulse life test end point

In the column headed "Conditions" amend "Grid 1 emission" to read "Total Grid 1 current (1)".

Page 4 K1006 Ref.4.9.20.3 Vibration

In the column headed "Conditions" delete reference to "Note 10".

/Page 4

Page 4 Note 4

Delete the final sentence "The valve shall run ...
.... without sparking".

Page 5 Note 11

Amend penultimate sentence to read "Check for short circuits with an approved neon sensitive detector".

May,1964

T.V.C. for R.R.E.

(222345)

