

G

E

C

# technical data

## GEC 7325 VIDICON

The GEC 7325 Vidicon has been especially designed for televising live scenes giving pictures of satisfactory quality with as little as .2 foot candles of illumination on the faceplate. Its improved photoconductive surface has excellent lag characteristics at low light levels, as well as high sensitivity. Optimum pictures may be obtained by adjustment of signal electrode voltage without limiting restrictions on dark current. The GEC improved internal construction allows the tube to be operated in any position and in high ambient noise environments.

### DATA

#### GENERAL:


|  |           |
|--|-----------|
| Operating Position   | Any       |
| Focusing Method  | Magnetic  |
| Deflection Method  | Magnetic  |
| Max. Useful Diagonal of Rectangular Image<br>(4 x 3 Aspect Ratio)  | 0.625 in. |
| Orientation of Image....Horizontal Scan should<br>be essentially parallel to a plane passing<br>through tube axis and the short index pin. |           |

#### ELECTRICAL CHARACTERISTICS:

|  |                  |
|--|------------------|
| Heater   |                  |
| Voltage (AC or DC)   | 6.3 V $\pm 10\%$ |
| Current  | .60 A $\pm 10\%$ |
| Direct Interelectrode Capacity<br>(Signal Electrode to all other Electrodes) | 3.1 uuf          |
| Spectral Response (See Fig. 4)   | S-18             |

#### ABSOLUTE MAXIMUM RATINGS:

|   |       |
|---|-------|
| Anode Voltage                           | 350 V |
| Grid No. 2 Voltage                      | 750 V |
| Grid No. 1 Voltage                      |       |
| Negative Bias Values                    | 125 V |
| Positive Bias Values                    | 0 V   |
| Heater - Cathode Peak Values            |       |
| Heater Negative with Respect to Cathode | 125 V |
| Heater Positive with Respect to Cathode | 10 V  |

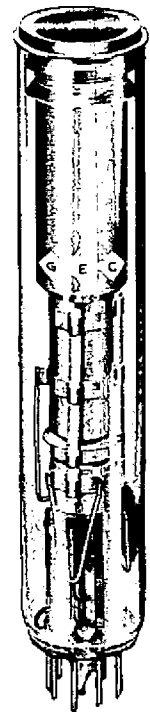

ELECTRONIC TUBE DIVISION

GENERAL ELECTRODYNAMICS CORPORATION, GARLAND, TEXAS

from JETEC release #2357, Jan. 12, 1959

BULLETIN NO. GEC-104-12-58



ABSOLUTE MAXIMUM RATINGS, Continued:

|                          |          |
|--------------------------|----------|
| Faceplate                |          |
| Illumination             | 500 ft-c |
| Temperature              | 71° C.   |
| Signal Electrode Current | .60 uA   |

TYPICAL OPERATION:

|   |                |
|---|----------------|
| * Scanned Area  | 0.500 x 0.375" |
| Faceplate Temperature   | 30° to 35° C.  |
| ** Optimum Signal-Output Current (See Figure 2)   |                |
| For uniform 2870° K Tungsten Illumination on faceplate down to .5 ft-c                              | .2 uA          |
| For uniform 2870° K Tungsten Illumination on faceplate from .2 ft-c to .5 ft-c                      | .14 to .2 uA   |
| Signal Electrode Voltage  |                |
| For 5 ft-c faceplate illumination and signal-output current of .2 uA                                | 10 to 50 V     |
| For .2 ft-c faceplate illumination and signal-output current of .14 uA                              | 40 to 100 V    |
| Average Gamma of Transfer Characteristic over Signal-Output Current operating range of .05 to .2 uA | .55            |
| Anode Voltage   | 200 to 300 V   |
| Grid No. 2 Voltage  | 300 V          |
| Grid No. 1 Voltage (For picture cut-off with no blanking voltage on Grid No. 1)                     | -45 to -100 V  |
| Minimum Peak-to-Peak Blanking Voltage   |                |
| When applied to Grid No. 1  | 30 V           |
| When applied to Cathode   | 10 V           |
| Magnetic Field Intensity at Center of Focusing Device   | 40 gauss       |
| Magnetic Field Intensity of Adjustable Alignment Coil   | 0 to 4 gauss   |

\* A scanned area of 0.500 x 0.375" was used to obtain all data and characteristic curves.

\*\* Signal-Output Current equals signal electrode current minus dark current.

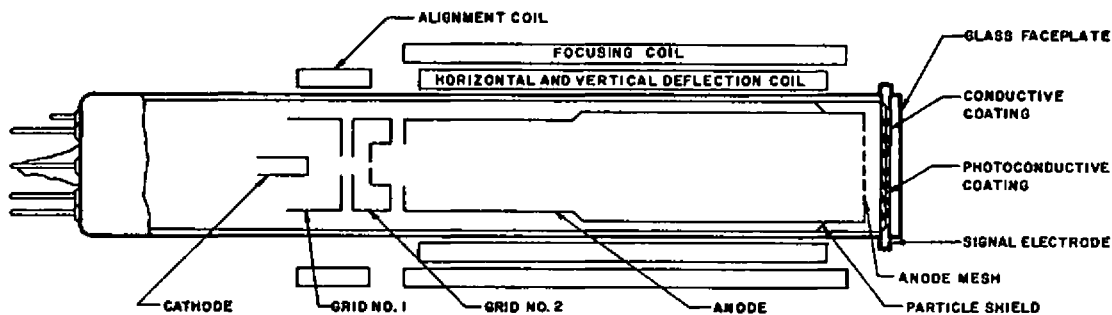


FIG. 1



## PRINCIPLES OF OPERATION

The operation of the GEC 7325 Vidicon is based on the principle of photoconductivity. This effect produces a change in electrical conductivity with variations in incident light intensity.

The inside surface of the Vidicon faceplate is coated with a transparent conductive coating as shown in Figure 1. Over this is deposited a layer of photoconductive material. This material, when dark, is a reasonably good insulator. The electron beam is made to scan the back surface of this photoconductive surface.

In operation, the front surface of the photoconductor is held at a potential of some 30V, more or less, positive with respect to the cathode, by the application of this voltage to the transparent conductive coating. The scanning electron beam deposits a negative charge on the back surface of the photoconductor. Where the photoconductor is dark, and its resistance therefore high, the negative charge accumulates until this back surface is at the same potential as the cathode; any further electrons will be turned away. The dark portions of the photoconductor thus become charged in the manner of a capacitor. Dark current is slight electrical leakage through the dark areas.

But where light falls on the photoconductor, from the image of the scene, the conductivity of the material is substantially increased. The resulting leakage of the charge leaves a "hole" in the pattern of negative charge at any illuminated point. Upon its next trip across this point, then, the scanning beam will deposit electrons into this "hole"; this movement of charge calls for a corresponding flow of current into the transparent conductive coating, and the resulting voltage across the load resistor is the output video signal.

The Vidicon thus has the ability to "store" the image for an entire scanning cycle; the image is "photographed" in the pattern of negative charge on the back surface of the photoconductive material, and is accumulated there for the time of one complete frame. This process allows the improved GEC Vidicon to produce usable output from scenes which are dimly lighted.

The end of the anode nearest the faceplate is covered by a very fine mesh screen. The purpose of this screen is to establish a uniform decelerating field in the vicinity of the photoconductive surface, so that the electrons will arrive perpendicular to this surface and with low velocity. The fine-mesh screen simply provides a conducting plane through which electrons can readily pass.

Focusing of the electron beam is done by a magnetic field which is parallel to the axis of the tube. Two magnetic fields which are perpendicular to the axis of the tube and to each other are the means of alignment. Deflection is accomplished by means of magnetic fields perpendicular to the axis of the tube. External coils are necessary to produce these fields.



## OPERATING CONSIDERATIONS

### DARK CURRENT:

Dark current increases with signal electrode voltage. In normal operation, dark current does not present a problem unless it is non-uniform across the photoconductive surface. The GEC 7325 has extremely uniform dark current, which eliminates the problems of edge flare, shading, and graininess present in earlier type vidicons. This permits the 7325 to be operated at higher values of dark current.

---

### OPTIMUM SIGNAL ELECTRODE CURRENT:

The GEC 7325 is not limited in its operation by dark current restrictions, as explained above. Therefore, best picture quality can be obtained by adjusting for optimum signal electrode current as shown in Figure 2. The resulting dark current is also shown in Figure 2 as an aid in circuit design. Signal output is the difference between signal electrode current and dark current and therefore can be obtained directly from Figure 2.

---

### LIGHT TRANSFER CHARACTERISTICS:

Typical signal output current as a function of faceplate illumination is shown in Figure 3. The slope of the curve gives the average gamma of the tube.

---

### SENSITIVITY:

Vidicon sensitivity is a function of the photoconductive coating characteristics as well as signal electrode voltage. The GEC 7325 has an improved photoconductive surface with higher inherent sensitivity than previous vidicons. At the same time, photoconductive surface uniformity permits operation at higher signal electrode voltages without dark current limitations. Therefore, higher effective sensitivity from higher signal electrode voltage is added to the improved inherent sensitivity.

Figure 3 also shows the variation of sensitivity with dark current. For example, at 1 foot candle and .02 uA dark current the signal output is .15 uA. Increasing the dark current to .2 uA increases the signal output to .31 uA. Since dark current increases with signal electrode voltage, this curve demonstrates the variation of sensitivity with signal electrode voltage.

---

### PERSISTENCE:

The GEC 7325 vidicon has improved persistence characteristics as a result of its new photoconductive surface. Figure 6 shows these characteristics.

---

### OPERATING TEMPERATURES:

No damage will result from operation of the tube at a temperature as high as 71° C. Figure 7 has been included as an aid to circuit design. This curve shows the variation in signal electrode voltage to maintain a constant signal electrode current as temperature is varied.

---

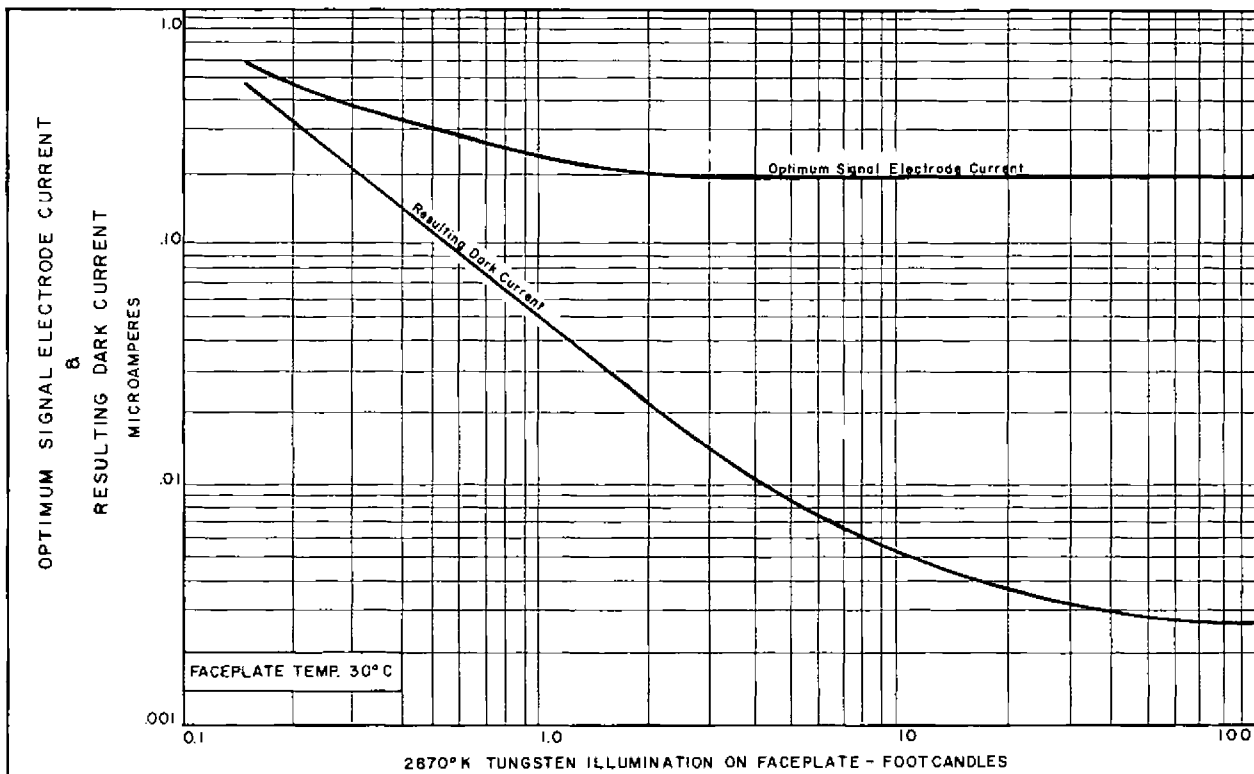


FIG. 2 OPTIMUM SIGNAL ELECTRODE CURRENT

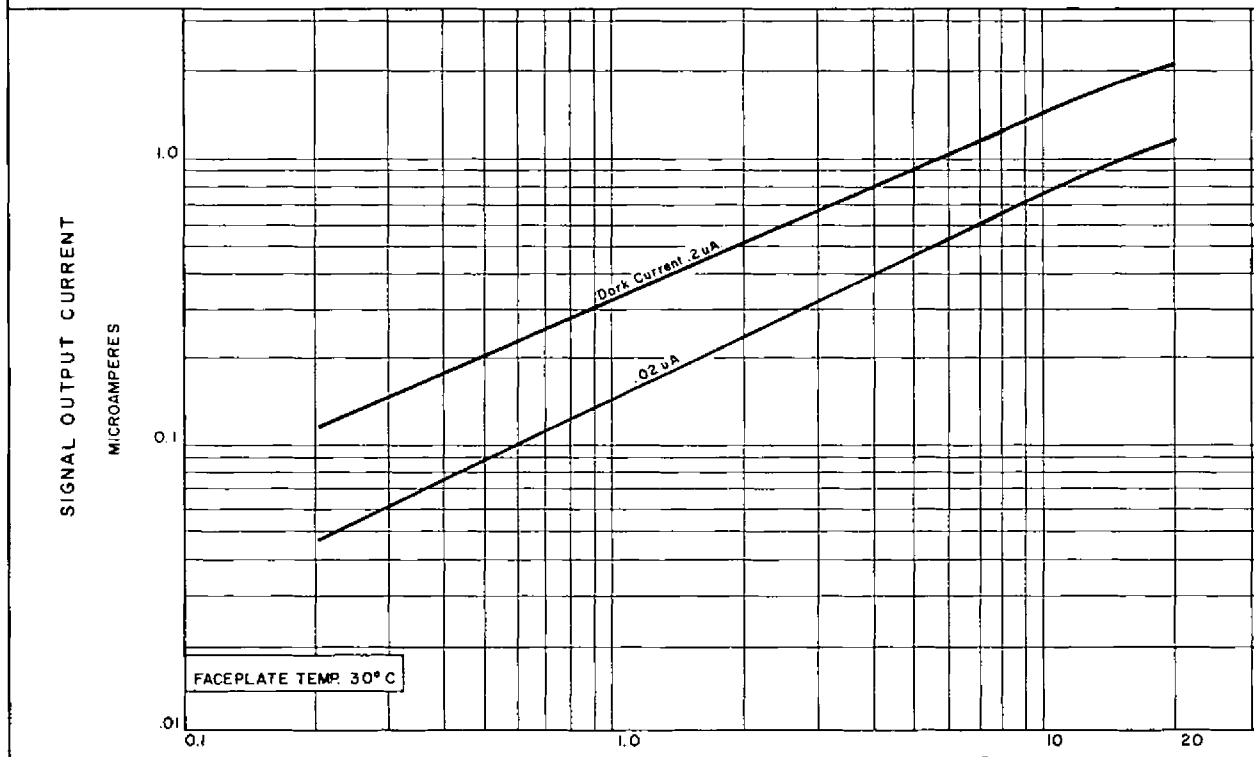


FIG. 3 TYPICAL LIGHT TRANSFER CHARACTERISTIC

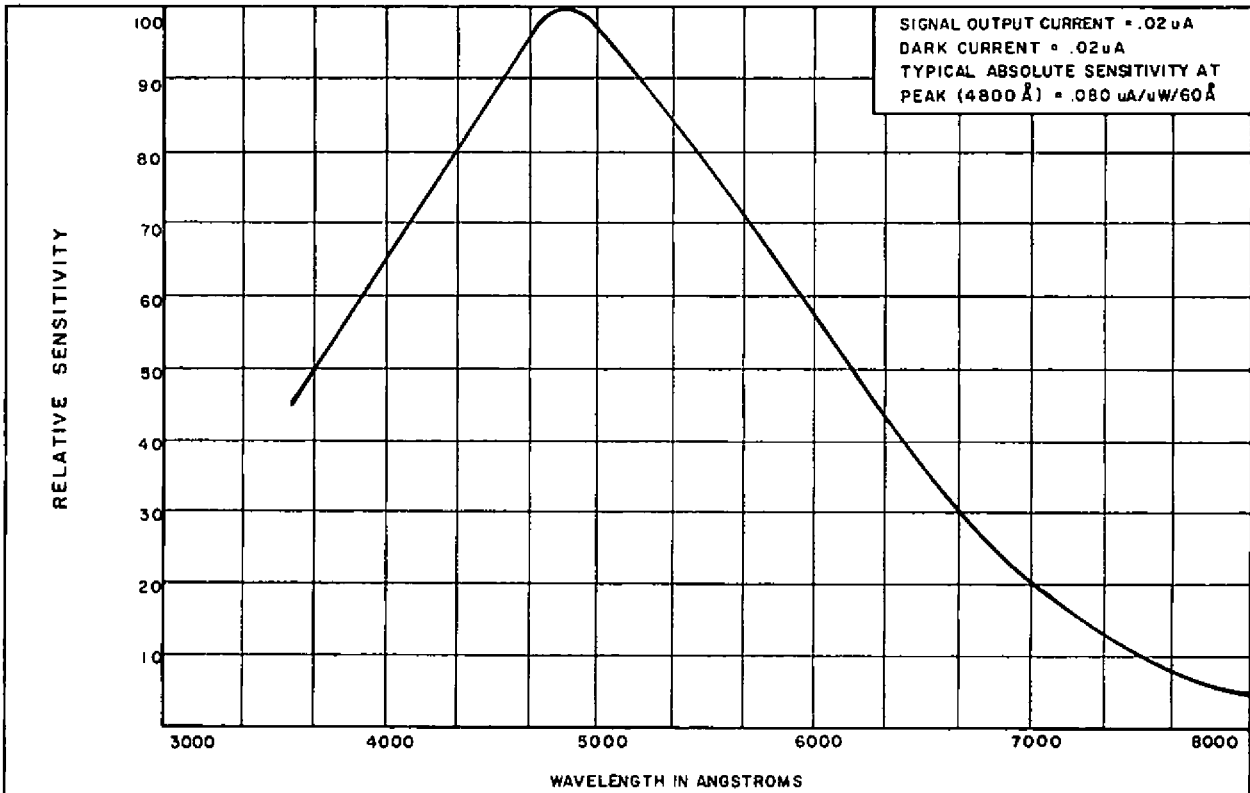


FIG. 4 SPECTRAL RESPONSE

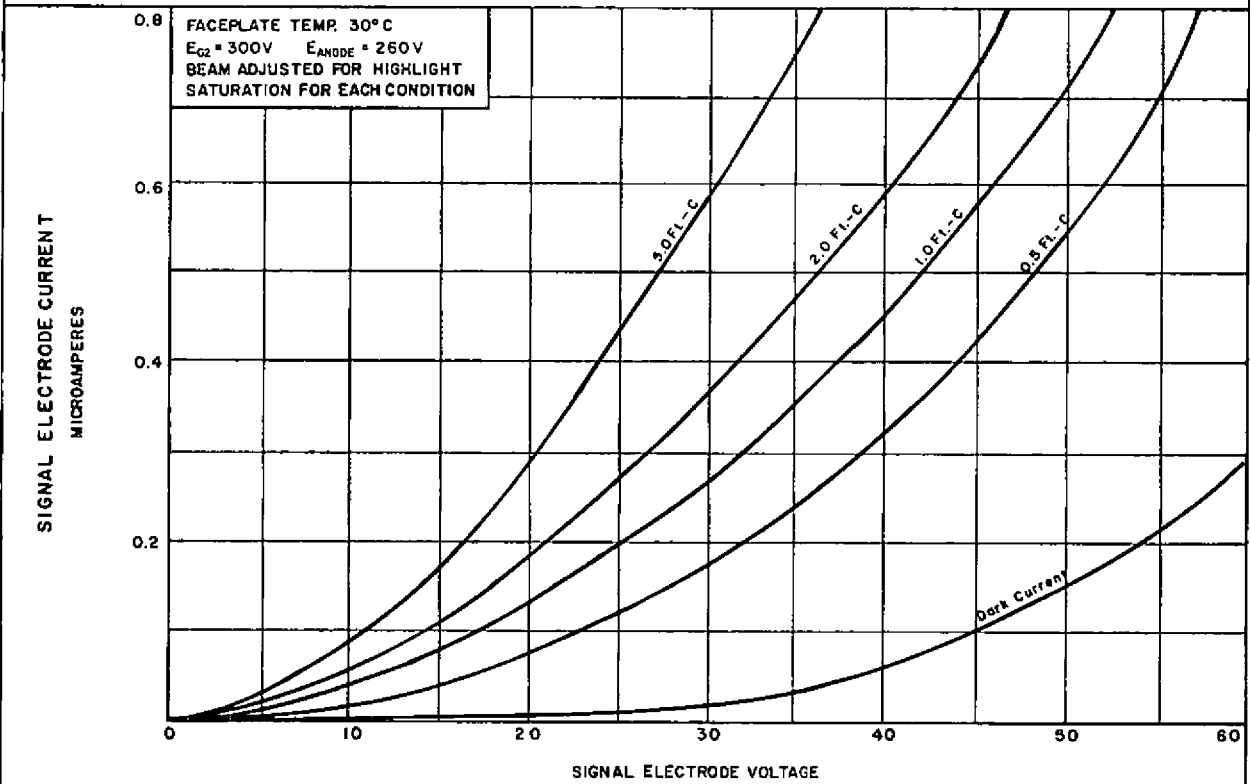


FIG. 5 SIGNAL ELECTRODE VOLTAGE - CURRENT CHARACTERISTICS


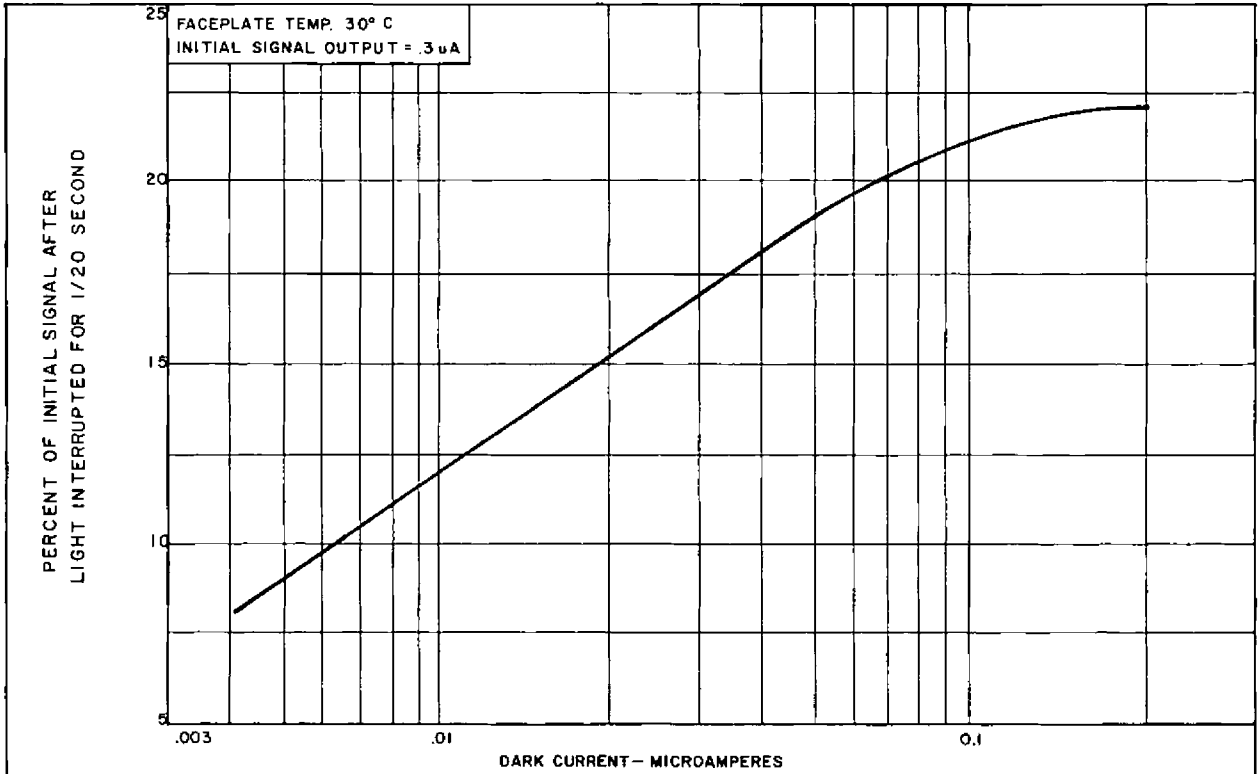


FIG.6 TYPICAL PERSISTENCE CHARACTERISTICS

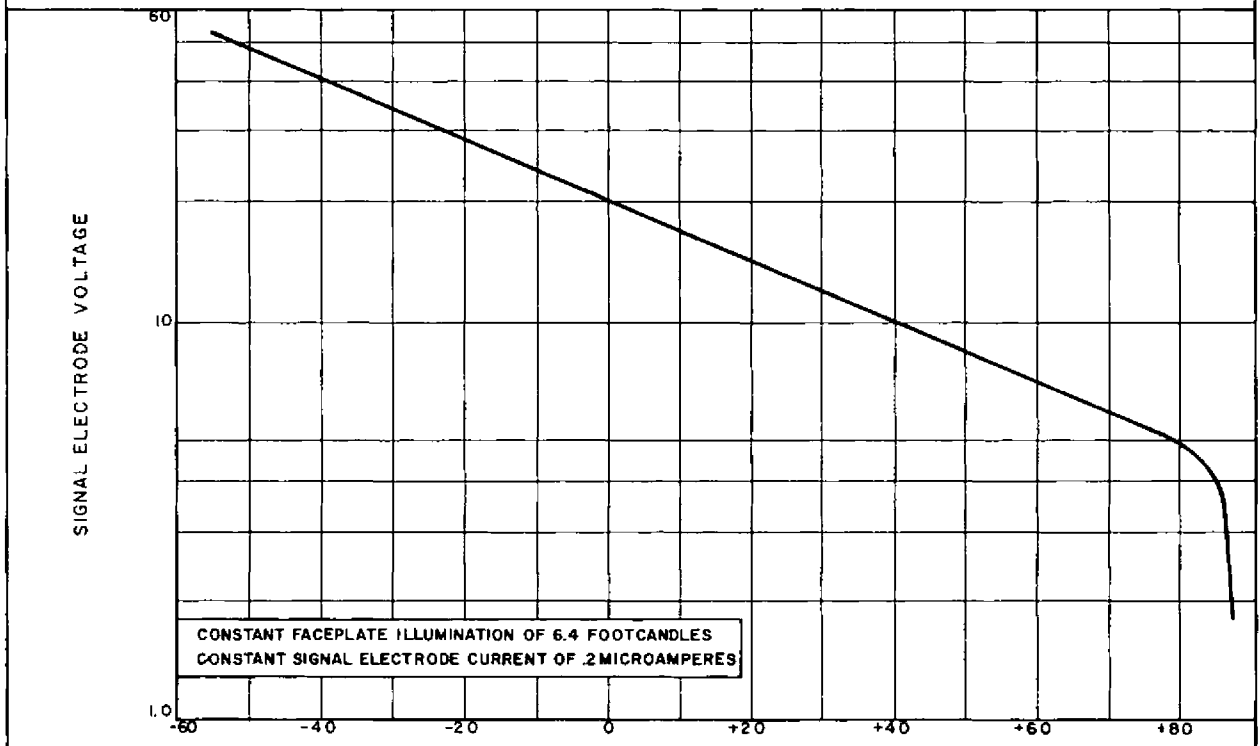

FACEPLATE TEMPERATURE - DEGREES CENTIGRADE  
FIG.7 TEMPERATURE CHARACTERISTICS

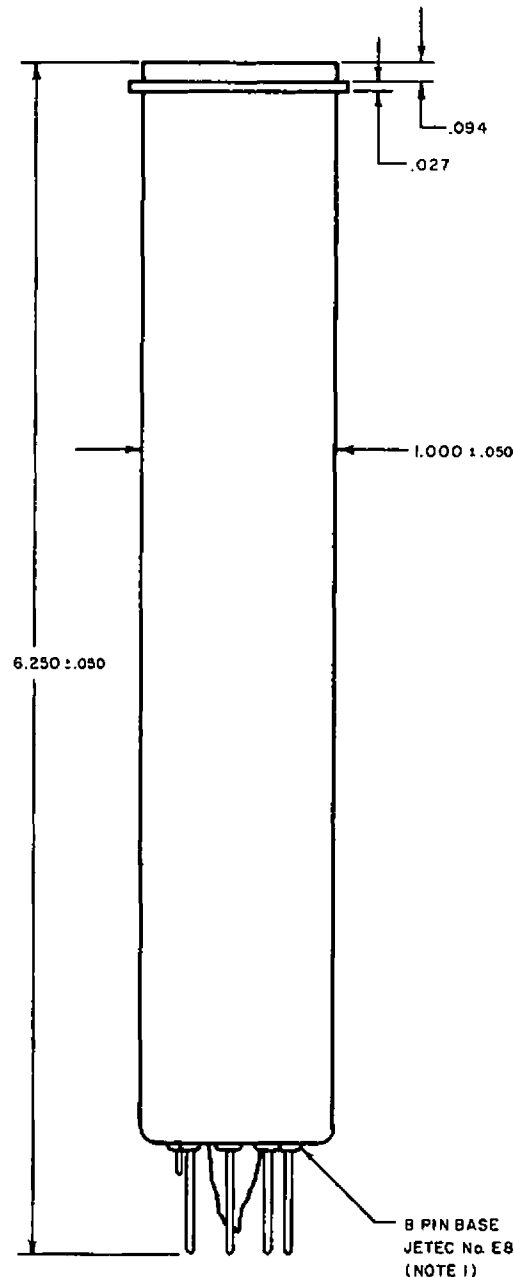



FIG. 8

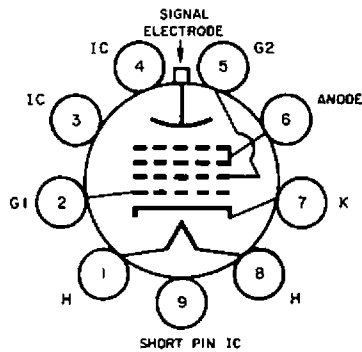


FIG. 9

- PIN 1: HEATER
- PIN 2: GRID No. 1
- PIN 3: INTERNAL CONNECTION--DO NOT USE
- PIN 4: INTERNAL CONNECTION--DO NOT USE
- PIN 5: GRID No. 2
- PIN 6: ANODE
- PIN 7: CATHODE
- PIN 8: HEATER
- FLANGE: SIGNAL ELECTRODE
- SHORT INDEX PIN: INTERNAL CONNECTION--DO NOT USE

NOTES

1. Base-pin positions fit 0.25 inch thick, 10-hole flat-plate gage with holes located as follows: 9 holes, 0.0550 (±0.0005) inch diameter equally spaced, 0.2052 (±0.0005) inch apart on a circle, 0.6000 (±0.0005) inch diameter, plus a center hole, 0.300 (±0.001) in. diameter, concentric with 9-hole circle.
2. All dimensions are shown in inches.