

MINISTRY OF SUPPLY (S.R.D.E.)

Specification MOS/CV782/Issue 3			<u>SECURITY</u>		
Dated:- 12.11.47			<u>Specification</u>		<u>Valve</u>
To be read in conjunction with K1001			Restricted		Unclassified
—————> indicates a change					
<u>TYPE OF VALVE:-</u> Pentagrid converter			<u>MARKING</u>		
<u>CATHODE:-</u> Directly heated			See K1001/4		
<u>ENVELOPE:-</u> Glass-unmetallised			Additional marking :-		
<u>PROTOTYPE:-</u> 1R5			1R5		
<u>RATING</u>		Note	<u>BASE</u>		
			B7G.		
Filament voltage (V)	1.4	A	Pin	Electrode	
Filament current (mA)	50		1	F-ve, G5	
Max. anode voltage	100		2	Anode	
Max. screen voltage (G2/4)	75		3	G2/4	
Max. grid voltage (G3)	0		4	G1	
Max. cathode current (mA)	6.5		5	F-ve, G5	
Conversion conductance (uA/V)	250		6	G3	
<u>CAPACITANCES (pF)</u>			7	F+ve	
Cag3 (max)	0.4		<u>DIMENSIONS</u>		
Cae	7.0		See K1001/AI/D4		
Cg3e	7.0		Dimensions		Min. Max.
<u>NOTES</u>			A mm	-	54
A. Measured at Va = 90, Vg2/4 = 45			B mm	-	19
Vg3 = 0, Vg1 = 15V. AC.					


To be performed in addition to those applicable in K1001

	Test conditions					Test	Limits		No. tested
							Min.	Max.	
a	See K1001/IIII					Capacitances (pF)			
	Links to H.P.	Links to L.P.	Links to E						
	2	6	1,3,4,5, 7,8,9,10, TC ₁ , TC ₂			(i) Cag ₃		0.4	6
	2	1,3,4,5, 7.	6,8,9,10, TC ₁ , TC ₂			(ii) Cae	5.2	8.8	per
	6	1,3,4,5, 7.	2,8,9,10, TC ₁ , TC ₂			(iii) Cg _{3e}	5.6	8.4	week
b	Vf	Va	Vg _{2/4}	Vg ₁	Vg ₃				
	1.4	-	-	-	-	I _f (mA)	44	56	100% or S
c	1.4	90	45	15AC	0	g _c (Note 2) (uA/V)	160	340	100%
d	1.4	90	45	15AC	-1	Rev. I _{g3} (uA)	-	0.6	100%
e	1.4	90	45	15AC	0	I _a (mA)	0.34	0.94	100%
f	1.4	90	45	15AC	0	I _c (mA)	1.53	3.45	100%
g	1.1	90	45	15AC	0	g _c (uA/V)	130	340	100%
h	1.1	-	45	0	0	I _{g1} (uA) (Note 1)	125	-	100%

NOTES

1. This test is performed with the anode floating, using a Boonton 10A Oscillator set with R_{g1} = 50,000 ohms, and with grid-to-filament resonant impedance adjusted to 9,500 ohms, or equivalent oscillator circuit (See Fig.2)
2. The effective conversion conductance is measured as follows:-
Set the voltages as given in the specification. Then adjust the backing-off voltage across the microammeter (δI_a) so that a zero reading is shown. Reverse the phase of the voltage applied to G₃ and note the reading on the microammeter (δI_a). The reading in microamps is numerically equivalent to the effective conversion conductance in micromhos.
3. Concessions will be given to individual manufacturers to carry out alternative tests to c - h if required. Tests c - g can all be carried out using the apparatus shown in Fig.1, with the addition of a screen current meter for test f and a galvanometer shunted for AC in the lead from G₃ to R₉ for test d.

FIG. 1

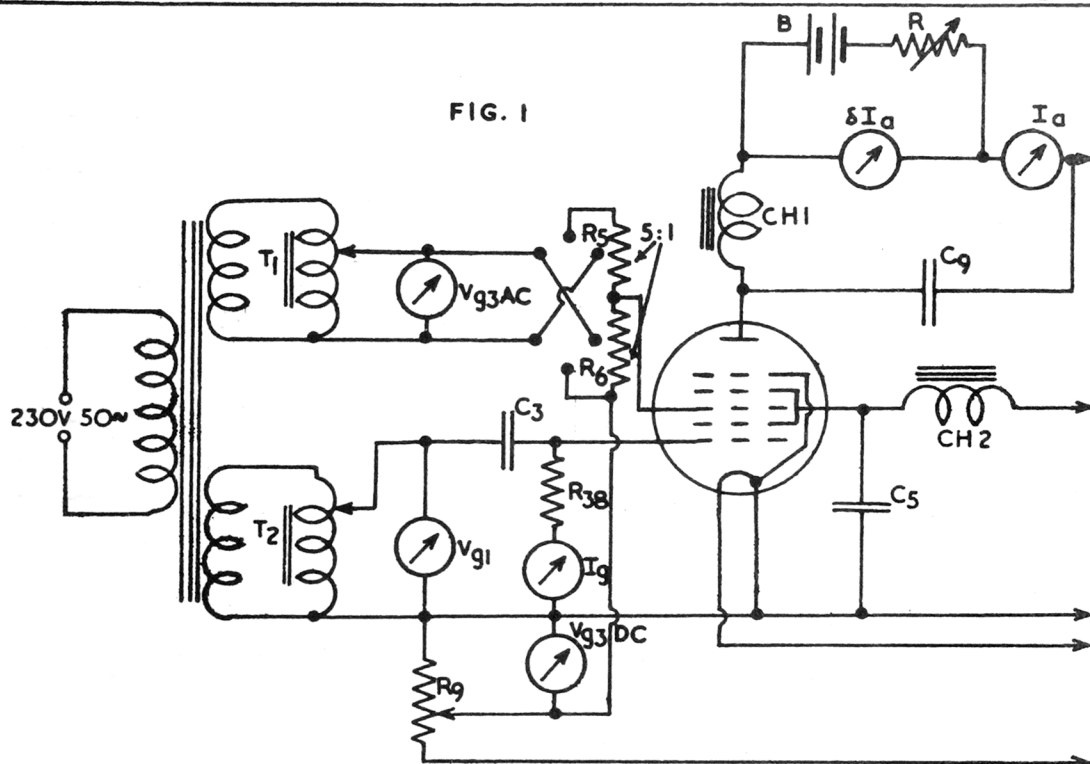

B, R = Backing-off circuit

C₃ = 8uF coupling capacitor

C₅ = 8uF filter capacitor

C₉ = 2uF filter capacitor

CH1 = 50H choke

CH2 = 50H choke

R₅ = 4/5 of (R₅ + R₆)

R₆ = 1/5 of (R₅ + R₆) R₅ + R₆ = 5kΩ ± 10%


R₉ = 2kΩ

R₃₈ = 100kΩ ± 5%

T₁ = Variac transformer

T₂ = Variac transformer

For 1% accuracy in the reading of effective conversion conductance on meter δI_a , the resistance of the backing-off circuit should at no time be less than 100 times the resistance of the meter δI_a and any other resistance in the same arm.

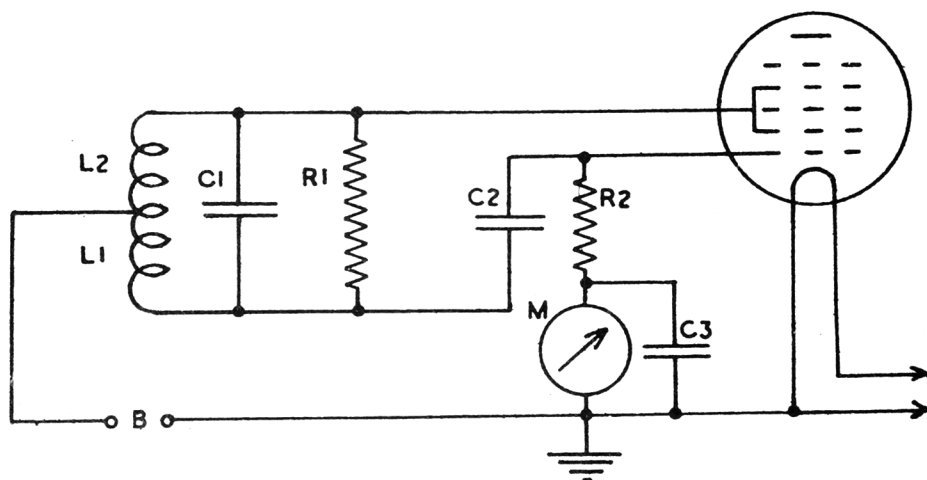

B = D.C. supply voltage

C1 = 100pF mica capacitor

C2 = 200pF mica capacitor

C3 = 0.1uF capacitor

M = D.C. microammeter

R1 = 44k Ω resistor

R2 = 50k Ω wire wound resistor

L1 = 83uH

L2 = 48uH

L1-L2 = 23.3uH

Coil diameter = 1.25"; winding length = 59/64";
 wire = ~~4~~30 enamelled copper; turns = 83.
 Tap at 33 turns from G2/4 end.

FIG. 2.

DATA SHEET

Valve Electronic Type CV 782

TYPICAL OPERATING CONDITIONS


As Frequency Changer - at up to 30 mc/s

Anode Voltage	45	90	90	Volts
Anode current	0.7	0.8	1.6	mA
Screen (G2) Voltage	45	45	67.5	Volts
Screen (G2) Current	1.9	1.9	3.2	mA
Oscillator Grid (G1) resistor	0.1	0.1	0.1	Megohm
Oscillator Grid (G1) Current	0.15	0.15	0.25	mA
Control Grid (G3) Voltage	0	0	0	Volts
Anode Impedance	0.6	0.8	0.6	Megohm
Conversion Conductance	0.24	0.25	0.3	mA/V
G3 bias for $G_c = 0.005$ mA/V	-9.0	-9.0	-14	Volts
Total Cathode Current	2.75	2.75	5.0	mA


Note



The control grid (G3) has variable- μ characteristics making it suitable for use with A.V.C.

CV 782/a/1.

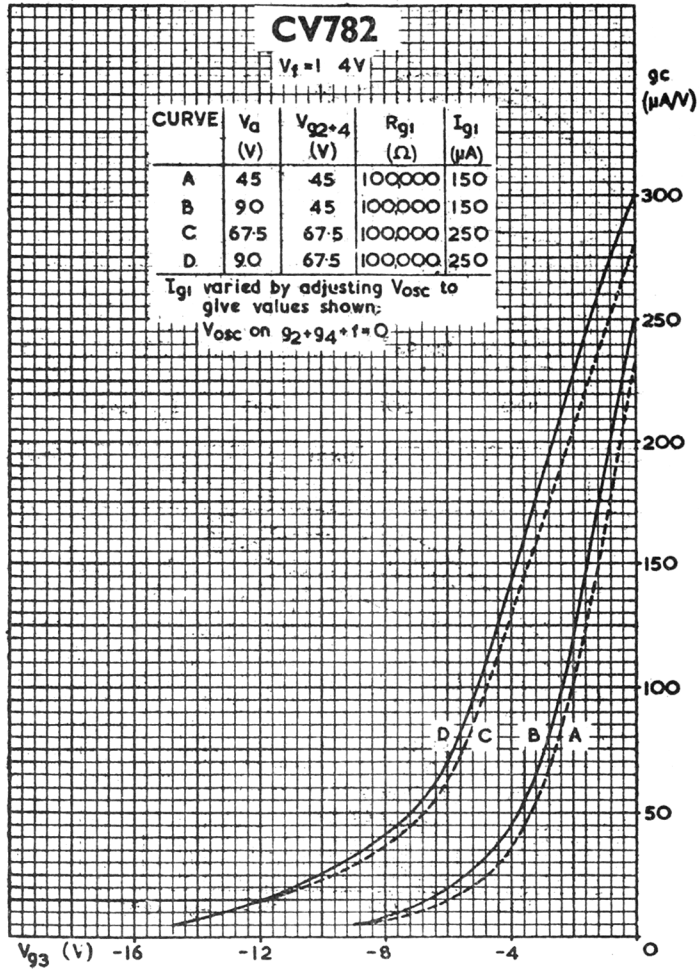

CV 782/a/2.

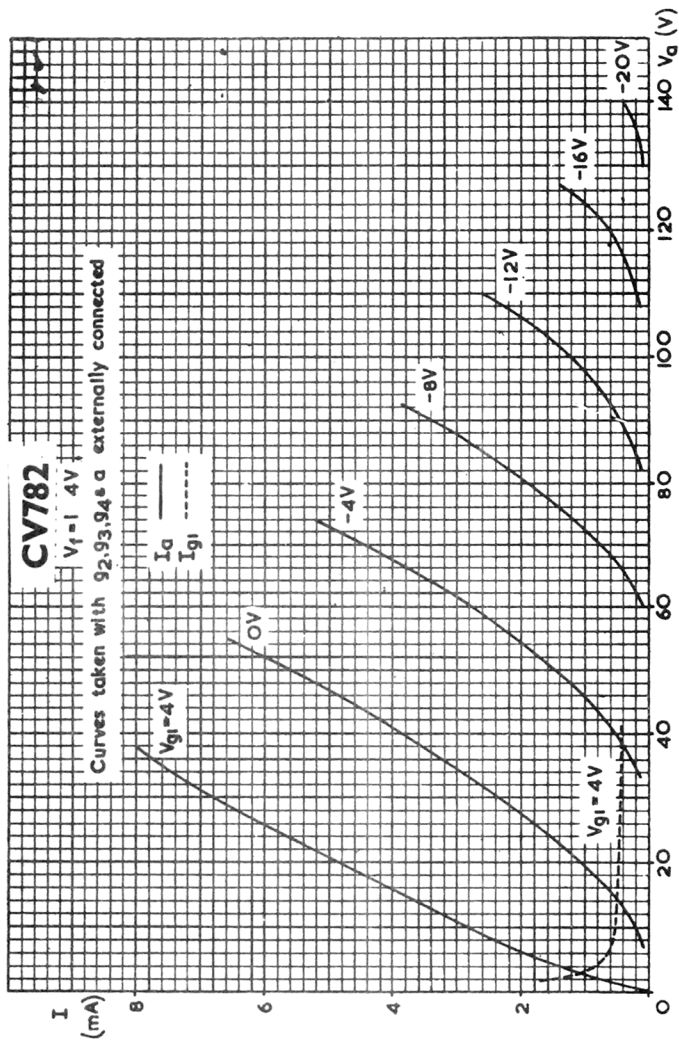

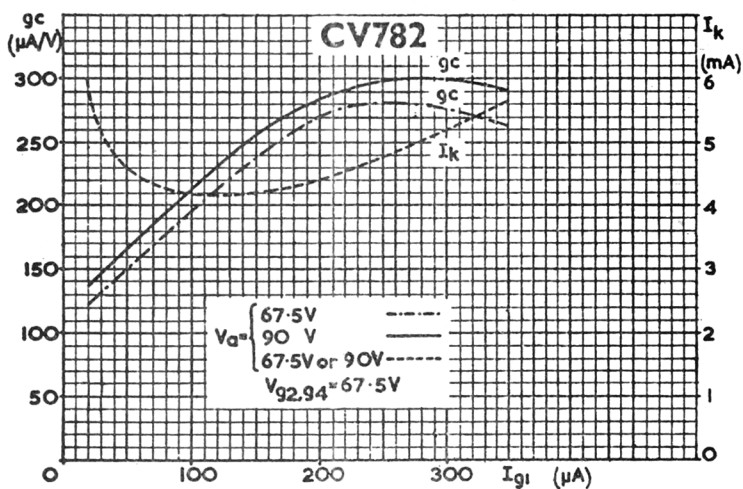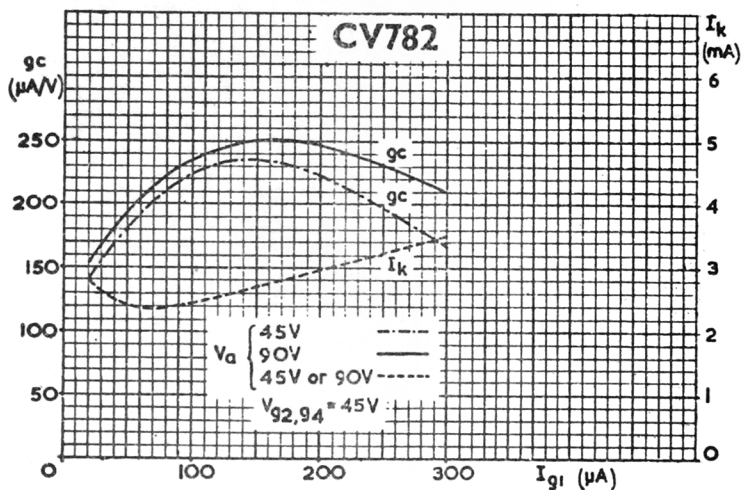

Conversion Conductance and Cathode Current plotted against Oscillator
Grid Current

$R_{K1} = 0.1 M \Omega$ $V_{g3} = 0$

CV 782/a/4.