

MINISTRY OF SUPPLY - DLRD(A)/RRE (South)

VALVE ELECTRONIC

CV 2164

Specification MOS(A)/CV2164 Issue 4 Dated 8. 6. 54. To be read in conjunction with K1001, excluding clause 5.3	<table border="1"> <tr> <th data-bbox="768 173 964 220">Specification</th> <th data-bbox="964 173 1146 220">SECURITY</th> </tr> <tr> <td data-bbox="768 220 964 290">UNCLASSIFIED</td> <td data-bbox="964 220 1146 290">Valve UNCLASSIFIED</td> </tr> </table>	Specification	SECURITY	UNCLASSIFIED	Valve UNCLASSIFIED
Specification	SECURITY				
UNCLASSIFIED	Valve UNCLASSIFIED				

TYPE OF VALVE - Velocity modulated oscillator with waveguide output			MARKING		
CATHODE - Indirectly-heated			See K1001/4		
PROTOTYPE - K302			BASE		
			International Octal		
RATING			CONNECTIONS		
			Note		
Heater Voltage	(V)	6.3	A	Pin	Electrode
Heater Current	(A)	0.56		1	No Connection
Max. Resonator Voltage	(V)	400		2	Heater
Max. Resonator Dissipation	(W)	20		3	Blank
Reflector Voltage Range	(V)	-80 to -165		4	Blank
Min. RF Power Output	(mW)	15		5	Resonator
Mechanical Tuning Range	(Mc/s)	9320 to 9500		6	Blank
Min. Electronic Tuning Range	(Mc/s)	20		7	Heater-Cathode
Nominal Reflector Voltage change to give 20 Mc/s electronic tuning	(V)	15		8	No Connection
Max. Total Impedance in reflector to cathode circuit	(Megohm)	0.5		TC	Reflector
			TOP CAP		
			See K1001/A1/D5.2		
			DIMENSIONS		
			See Drawing, Page 4		
			MOUNTING POSITION		
			Any		

NOTES



- A. Each valve is marked with the reflector voltage at which the valve will oscillate and give a power output of at least 10 mW over the whole band.
- B. The reflector voltage must always remain negative with respect to cathode. If under AFC working there is a chance of the reflector voltage becoming equal to, or positive with respect to cathode, a protective diode must be used.

To be performed in addition to those applicable in K1001

Test Conditions					Test	Limits		No. Tested	Note
	Vh (V)	V Resonator (V)	V Reflector (V)	Frequency (Mc/s)		Min.	Max.		
a	6.3	-	-	-	Heater Current (A)	0.52	0.61	Note 1	
b	6.3	350	Adjust	At random point in band 9320-9500	RF Power Output (mW) Measured within 3 minutes of switching on all supplies Reflector Voltage (V)	12 -80	- -165	Note 1	2
c	6.3	350	Adjust	9410 \pm 20	Frequency Drift (Mc/s) Reflector Voltage (V) Beam Current (ma)	- -80 -	5 -165 44	Note 1	3 2
d	6.3	350	Adjust	9320	RF Power Output (mW) Reflector Voltage (V)	15 -80	- -165	100%	2
e	6.3	350	Adjust	9320	Electronic Tuning (Mc/s) Measured at 3 db points	20	-	Note 1	
f	6.3	350	Adjust	9500	RF Power Output (mW) Reflector Voltage (V)	15 -80	- -165	100%	2
g	6.3	350	Adjust	9500	Electronic Tuning (Mc/s) Measured at 3 db points	20	-	Note 1	
h	6.3	350	Adjust	9410 \pm 20	Frequency Variation (Mc/s) When 2 Megohm resistor is inserted in series with reflector lead	-	4	Note 1	
j	6.3	350	Adjust. Value to be marked on valve.	9320-9500	Reflector Voltage (V) To give at least 10 mW power output over full frequency range	-80	-165	100%	
k	5.7	350	Adjust	9410 \pm 20	RF Power Output (mW)	10	-	100%	
m	5.7	350	As for Test (k)	As for Test (k)	Decrease in Beam Current from the value in Test (c) Reflector Voltage (V)	-	30%	100%	2

NOTES

1. These tests to be performed on a sample batch of 6 valves per day or 10% of the day's production whichever is greater. If this sample batch passes these tests, then all valves will be accepted to these tests. If there are any rejects in the sample batch then all valves in the day's production will be tested.
2. Reflector voltages given correspond to the maximum power points of the reflector mode.
3. With the valve inserted into an approved test mount, the frequency drift shall be measured between 4 mins and 15 mins after switching on all supplies.

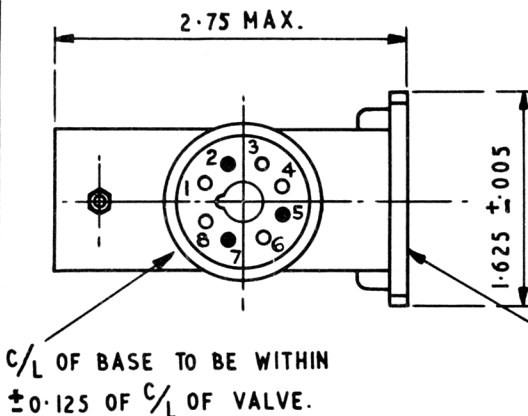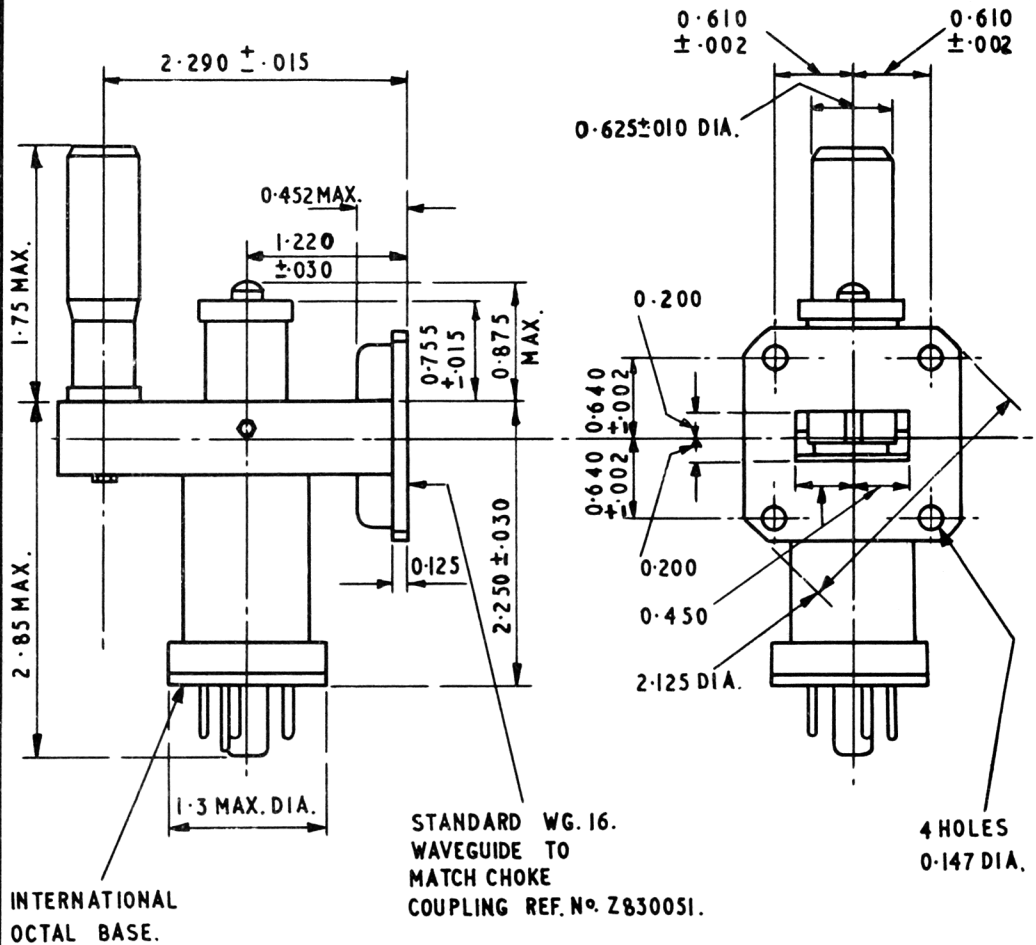

NOTE:— THE MICROMETER TUNER IS MADE TO FIT A $\frac{1}{4}$ IN. SPINDLE HAVING A $\frac{1}{16}$ IN. SAW-CUT.

ALL DIMENSIONS IN INCHES.