




## DESCRIPTION

General

The D13-50../01 has been primarily designed for wide-band high-frequency applications. It combines high brightness, high deflection sensitivity and a large bandwidth of the vertical deflection system.

In order to obtain the high sensitivity, the post-deflection acceleration system embodies a mesh. The sensitivity in the vertical direction has been further increased by means of an electrostatic quadrupole lens that has been inserted between the vertical deflection system and the horizontal deflection plates. The large band-width has been obtained by using, for the vertical deflection, a delay-line system instead of deflection plates. With the typical operating conditions, 2500 V first accelerator voltage and 15000 V final accelerator voltage, the vertical and the horizontal deflection factors are about 2 V/cm and 15 V/cm respectively, with a  $10 \times 6 \text{ cm}^2$  display area.

The bulb has a rectangular face and the screen is aluminized. To eliminate parallax errors, an internal graticule is incorporated. Correction coils have been provided to permit image rotation, correction of the orthogonality of traces and the adjustment of the vertical useful scan with respect to the graticule.

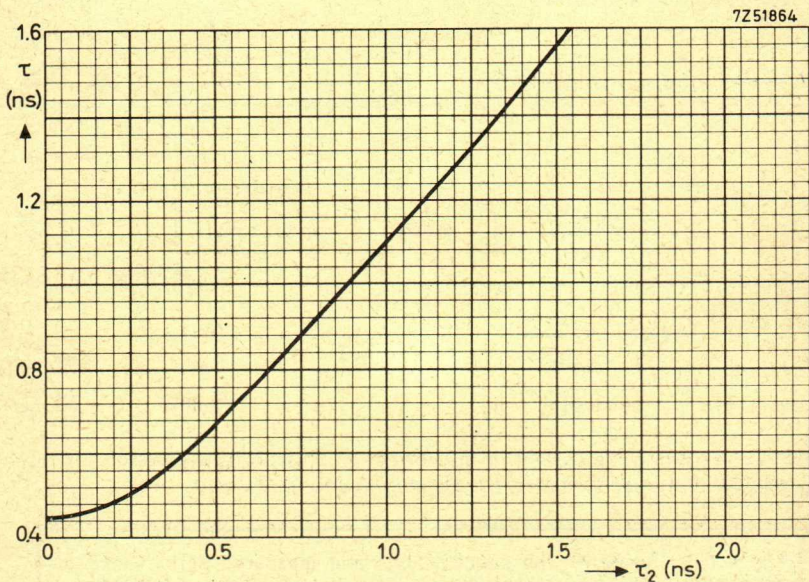

Rise time of the display  $\tau$  as a function of the rise time of the input signal  $\tau_2$   
fig. 1

### The vertical deflection system

For the vertical deflection, a delay-line system is used so that transit-time effects are practically eliminated. The system consists of two flattened helices to which a symmetrical deflection signal should be applied. Under these conditions, the characteristic impedance of each helix is  $150 \Omega$ . The input and output terminals are brought out on opposite sides of the neck on the same plane. The input terminals are connected to the beginning of the helices by means of a matched, internal two-wire transmission line. The output of the deflection system should be properly terminated in order to avoid signal reflections.

With the typical operating conditions, the band-width of the deflection system, i.e. the frequency at which the sensitivity is 3 dB below its value at D.C., is about 800 MHz. Even above this frequency, the response decreases only gradually so that, for narrow-band applications, the tube can be used with reduced vertical sensitivity up to about 2000 MHz.


The rise-time  $\tau_1$ , i.e. the time interval during which the display of an ideal step-function signal applied to the input goes from 10% to 90% of its final value, is about 0.45 ns. If the input signal has the rise-time  $\tau_2$ , the rise-time  $\tau$  of the display is approximately given by

$$\tau = \sqrt{\tau_1^2 + \tau_2^2}$$

In fig. 1,  $\tau$  has been plotted as a function of  $\tau_2$ , with  $\tau_1 = 0.45$  ns. If, for example, the tube is used in combination with an amplifier and the rise-time of the display is to be 1.4 ns (corresponding with 250 MHz band-width), the rise-time of the amplifier should be 1.33 ns. It can be seen that in this region the rise-time of the display is almost equal to the amplifier rise-time, without a significant contribution of the cathode-ray tube.

If the tube is to be used without an amplifier in order to make use of its full band-width capabilities, care should be taken to ensure good symmetry of the input signal.

Fig. 2 shows how the tube can be connected to a  $50 \Omega$  coaxial input. A matched power divider is used which delivers two identical output signals. One of these is inverted by means of a pulse inverter. An additional length of  $50 \Omega$  cable should be inserted into the path of the non-inverted signal having the same delay time as the pulse inverter so that the two signals arrive at the input of the deflection system at the same time. The  $75 \Omega$  shunt resistors serve to obtain a correct termination of the  $50 \Omega$  lines. Since each branch of the power divider has 6 dB attenuation, the sensitivity, measured at the  $50 \Omega$  input, is also 2 V/cm.

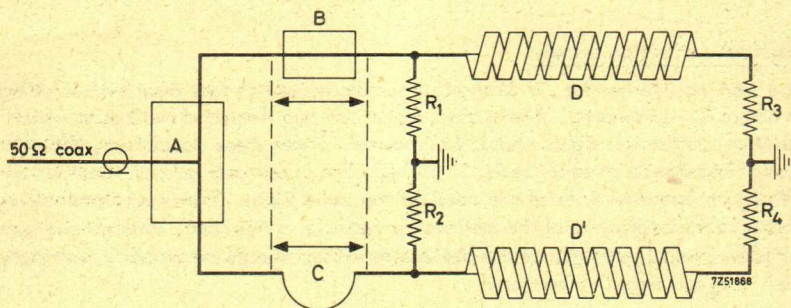

Connection to an asymmetrical 50  $\Omega$  input

A: Power divider

$R_1, R_2$  : Resistors 75  $\Omega$

B: Inverter

$R_3, R_4$  : Resistors 150  $\Omega$

C: Cable

D, D' : Deflection system

Note: Delay of inverter B and cable C are equal fig. 2

#### Scan magnifier and focusing system

As already mentioned, an electrostatic quadrupole lens, i.e. an electron lens which has two mutually perpendicular planes of symmetry, divergent in one plane and convergent in the other, is used for the magnification of the vertical deflection. This lens is inserted between the vertical deflection system and the horizontal deflection plates, with its plane of divergence in the direction of the vertical deflection. Therefore, it magnifies the vertical deflection without affecting the horizontal deflection.

Because of the astigmatic properties of this quadrupole lens, a conventional, rotationally symmetrical focusing lens cannot be used. Instead of this, two more electrostatic quadrupole lenses are incorporated so that focusing is accomplished by means of three quadrupole lenses, with alternating orientation of their planes of convergence and divergence. The focusing action is schematically shown in fig. 3.

The strength of the scan-magnifier lens is controlled by applying to the electrode  $g_2$  a negative voltage with respect to  $g_1$ . Within a certain range of this voltage, corresponding to a scan-magnification factor  $M_{sc}$ , i.e. the ratio of the deviations on the screen with and without scan magnification respectively, between 1.8 and 2 the combined effect of the three lenses will yield an approximately circular spot at moderate beam currents. (At high beam currents, when space-charge repulsion causes an increase of spot size, the width of the vertical lines will be smaller than that of the horizontal lines).


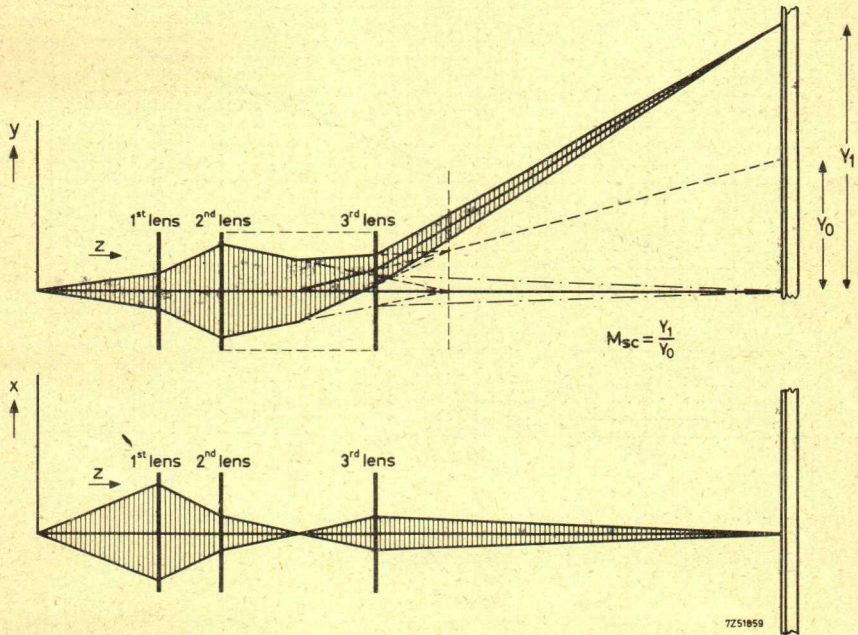


fig. 3

In this range, line-width at a fixed value of screen current, and screen current at a fixed value of grid nr. 1 voltage, are increasing functions of the scan-magnification factor. Figs. 4 and 5 show the average relative change with respect to the values at  $M_{sc} = 1.9$  which, generally, is the most suitable compromise.

For minimum defocusing of vertical lines near the upper and lower edge of the display area, the electrode  $g_7$  should be kept at a positive voltage with respect to  $g_2$  (about 200 V with 2500 V first accelerator voltage). As this voltage also has some effect on the scan-magnification factor, both  $g_7$  and  $g_8$  should be connected to  $g_2$  when the deviation without scan magnification is being measured.

7Z51865

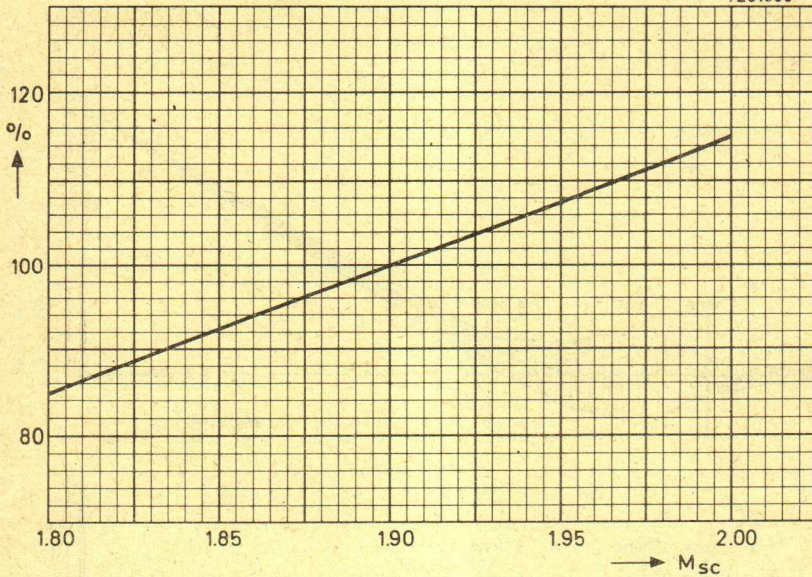


Line-width as a function of the scan-magnification factor (approximately)

Line-width at  $M_{sc} = 1.9$  is 100%,  $I_p = \text{const.}$

fig. 4

7Z51866

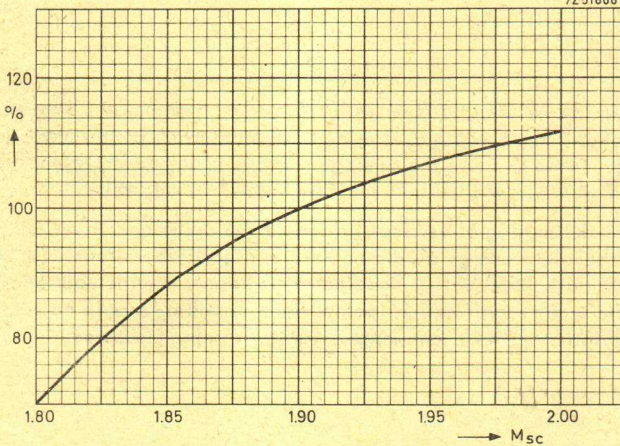

Screen current as a function of the scan-magnification factor (approximately)

Screen current at  $M_{sc} = 1.9$  is 100%,  $V_{g1} = \text{const.}$

fig. 5

For the adjustment of the scan-magnification factor the following procedure is recommended:

- a. Set  $V_{g7}$  and  $V_{g8}$  to 0 with respect to  $g_2$ .
- b. Display a time-base line and adjust  $V_{g5}$  so that the line appears sharply focused.
- c. Apply a square wave signal to the vertical deflection system (the vertical parts of the trace will be out of focus but this is immaterial) and adjust the amplitude so that the height of the display has a convenient value, e.g. 30 mm.
- d. Set  $V_{g7}$  and  $V_{g8}$  to the appropriate values and readjust  $V_{g5}$  so that the horizontal parts of the trace are again in focus.
- e. Check the height of the display (e.g. for  $M_{sc} = 1.9$  this height should now be 57 mm).
- f. If necessary, readjust  $V_{g8}$  until the desired value of  $M_{sc}$  has been obtained.

Focusing is controlled by means of the electrode voltages  $V_{g3}$  and  $V_{g5}$ . Having two focus controls is, in fact, not an extra complication, as a separate astigmatism control is not required. The electrodes  $g_4$  and  $g_6$  can be used to centre the beam with respect to the vertical and horizontal deflection systems.

The voltages of the focusing and correction electrodes can be adjusted as follows:

- a. Display a square-wave signal on the screen so that both horizontal and vertical traces are visible.
- b. Adjust  $V_{g5}$  so that the horizontal parts of the display are in focus. The vertical parts will, in general, be out of focus.
- c. Adjust  $V_{g3}$  so that the vertical traces are brought into focus. Now the horizontal parts of the display will be out of focus again.
- d. Repeat b) and c) successively until both vertical and horizontal traces are simultaneously in focus.
- e. Adjust  $V_{g6}$  for equal brightness at the left-hand and right-hand edges of the display area. If necessary, readjust the focus by means of  $V_{g5}$ .
- f. Adjust  $V_{g4}$  so that the position of a horizontal trace not deflected in the vertical direction is at the centre of the vertical useful scan. If necessary, readjust the focus by means of  $V_{g3}$ .  
If the graticule is not fully covered by the scanned area the image should be shifted by adjusting the correction coil current (see page 16) before the adjustment of  $V_{g4}$  is made.

The procedure for the adjustment of the scan-magnification factor and for focusing, as described above, seems to be rather complicated.

However, in practice it will be sufficient to adjust  $V_{g8}$  to its nominal value without determining the scan-magnification factor for each individual tube. As to focusing, the user can, with some experience, achieve the best setting with very few adjustments.

#### Post-deflection acceleration

The use of a p.d.a. shield (mesh) ensures a high deflection sensitivity. A geometry control electrode,  $g_{10}$ , serves for the correction of pin cushion or barrel distortion of the pattern. In order to suppress background illumination due to secondary electrons originating from the p.d.a. shield  $g_{11}$ , this shield should be kept 12 V negative with respect to  $g_{10}$  whereas the voltage of the interplate shield,  $g_9$  should be equal to the mean x-plate potential.

HEATING: Indirect by A.C. or D.C. : parallel supply

Heater voltage	$V_f$	6.3	V
Heater current	$I_f$	300	mA


#### CAPACITANCES

$x_1$ to all other elements except $x_2$	$C_{x1(x2)}$	4.5	pF
$x_2$ to all other elements except $x_1$	$C_{x2(x1)}$	4.5	pF
$x_1$ to $x_2$	$C_{x1x2}$	2.7	pF
Control grid to all other elements	$C_{g1}$	6	pF
Cathode to all other elements	$C_k$	5	pF

1) Clear area for light conductor

2) These dimensions apply to the illumination plate which will always be within the limits  $117 \pm 1.5 \times 79 \pm 1.5$  mm of the tube face.

MECHANICAL DATA

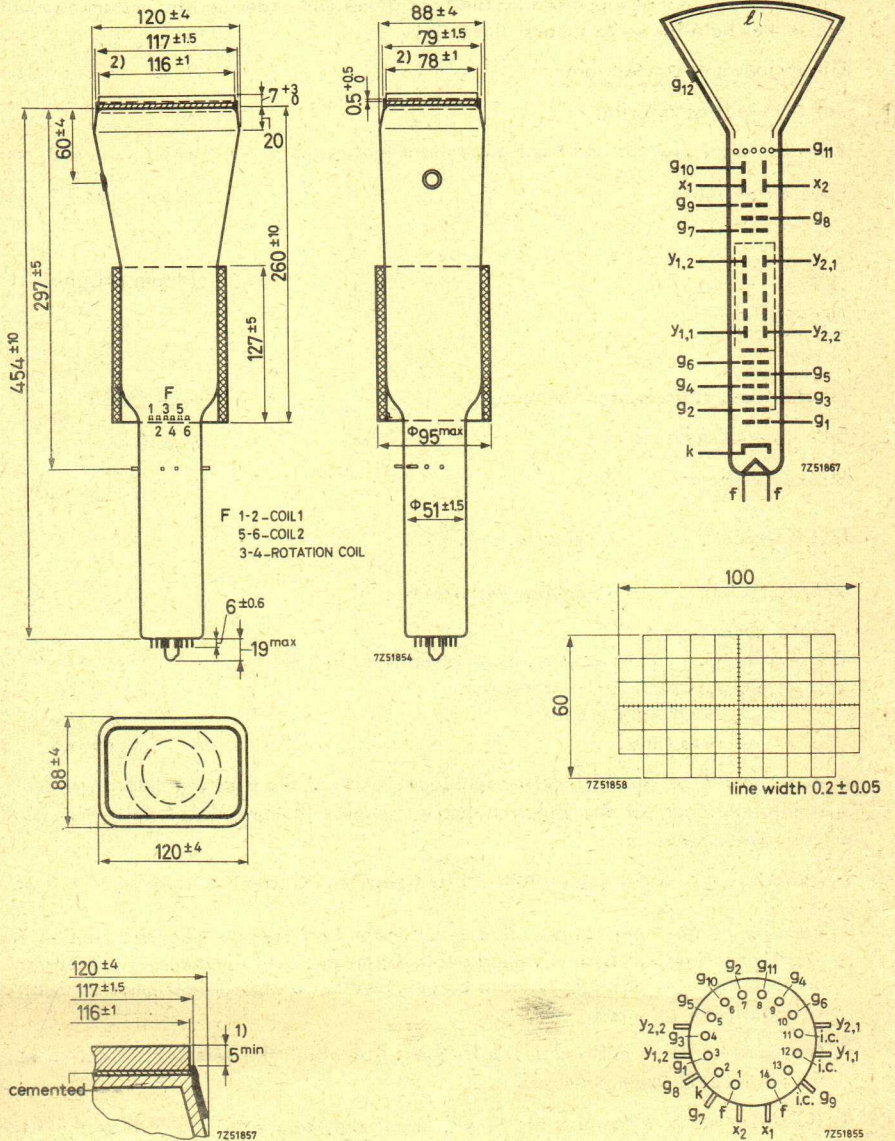

Notes: see page 8

## MECHANICAL DATA (continued)

Mounting position: any

The tube should not be supported by the base alone and under no circumstances should the socket be allowed to support the tube.

Dimensions and connections

See also outline drawing

Overall length (socket and front glass plate inclusive) max. 493 mm  
 Face dimensions max. 124x92 mm<sup>2</sup>

Base 14-pin all glass

Accessories

Socket type 55566  
 Final accelerator contact connector type 55563  
 Side contact connector type 55561  
 Mu-metal screen type 55582

FOCUSING electrostatic <sup>1)</sup>

DEFLECTION double electrostatic

x plates symmetrical

The y deflection system consists of a symmetrical delay line system. Characteristic impedance

Bandwidth (-3dB) 2x150 Ω  
 800 MHz <sup>2)</sup>  
 Rise time 0.45 ns <sup>3)</sup>

If use is made of the full deflection capabilities of the tube the deflection plates will intercept part of the electron beam: hence a low impedance deflection plate drive is desirable.

Angle between x and y traces 90°. <sup>4)</sup> (see page 14 "Correction coils")

<sup>1)</sup> Because of the applications of a quadrupole lens for the magnification of the vertical deflection, two more quadrupole lenses are used for focusing. Therefore, controls for two voltages have to be provided but a separate astigmatism control voltage is not required.

<sup>2)</sup> The band-width is defined as the frequency at which the vertical deflection sensitivity, is 3 dB lower than at D.C.

<sup>3)</sup> The rise-time is defined as the time interval between 10% and 90% of the final value of deflection when an ideal step-function signal is applied to the vertical



Geometry distortion	see 9)
Useful scan, horizontal	100 mm
vertical	60 mm

## LIMITING VALUES (Absolute max. rating system)

Final accelerator voltage	$V_{g12(\ell)}$	max.	20000 V
		min.	9000 V
Post deflection shield voltage	$V_{g11}$	max.	3100 V
Geometry control electrode voltage	$V_{g10}$	max.	3100 V
Interplate shield voltage	$V_{g9}$	max.	3100 V
Scan-magnifier electrode voltage	$V_{g8}$	max.	3100 V
Correction electrode voltage	$V_{g7}$	max.	3200 V
Focusing electrode voltages	$\left\{ \begin{array}{l} V_{g5} \\ -V_{g5-g2} \\ V_{g3} \\ -V_{g3-g2} \end{array} \right.$	max.	3000 V
		max.	1000 V
		max.	3000 V
		max.	1000 V
Beam centering electrode voltages	$V_{g6}$	max.	3100 V
	$V_{g4}$	max.	3100 V
First accelerator voltage	$V_{g2}$	max.	3000 V
		min.	2000 V
Control grid voltage, negative	$-V_{g1}$	max.	200 V
	positive $V_{g1}$	max.	0 V
Cathode to heater voltage	cathode positive $V_{+k f}$	max.	200 V
		cathode negative $V_{-k f}$	max.
Voltage between first accelerator and any deflection electrode	$V_{g2 x}$	max.	500 V
	$V_{g2 y}$	max.	500 V
Screen dissipation	$W_{\ell}$	max.	3 mW/cm <sup>2</sup>
Ratio $V_{g12(\ell)}/V_{g2}$	$V_{g12(\ell)}/V_{g2}$	max.	10
Average cathode current	$I_k$	max.	300 $\mu$ A

## Notes to pages 11 and 12

- 1) This voltage should be adjusted for optimum pattern geometry.
- 2) This voltage should be equal to the mean x-plate potential.
- 3) The range indicated corresponds to a scan magnification factor  $M_{sc}$ , i.e. the ratio by which the vertical deviation on the screen is increased, in the approximate range  $1.8 < M_{sc} < 2.0$ , and the tube should not be operated outside this range. Within this range, line-width and screen current at a fixed value of the control-grid voltage are increasing functions of  $M_{sc}$ . The best compromise between brightness and line width is usually found at  $M_{sc} \approx 1.9$  which corresponds to  $V_{g8-g2} \approx 310$  V.
- 4) For minimum defocusing of vertical lines near the upper and lower edges of the scanned area this voltage should be approximately adjusted to the value indicated. Since the value of  $V_{g7-g2}$  has some effect on the scan-magnification factor both  $V_{g7}$  and  $V_{g8}$  should be connected to  $g2$  when the deviation without scan magnification is to be measured.
- 5) By adjusting this voltage a spot not deflected in the vertical direction may be centered with respect to the vertical useful scan.
- 6) This voltage should be adjusted for equal brightness in the x-direction with respect to the electrical centre of the tube.
- 7) For a scan-magnification factor  $M_{sc} = 1.9$ . In the above mentioned range of  $V_{g8-g2}$  the vertical deflection factor will vary approximately  $\pm 5\%$ .
- 8) The sensitivity at a deflection of less than 75 % of the useful scan will not differ from the sensitivity at a deflection of 25 % of the useful scan by more than the indicated value.
- 9) A rectangle of 98 by 58.2 mm<sup>2</sup> is concentrically aligned with the internal graticule of the tube. The edges of a raster will fall between this rectangle and the boundary lines of the internal graticule with correction potentials applied.