



**THOMSON-CSF**

GROUPEMENT TUBES ELECTRONIQUES

DATA TEG 2001


**TH 297**

October 1969 - Page 1/8

## TH 297 TETRODE

The TH 297 is a forced air cooled ceramic metal tetrode, of coaxial structure. It can be used as a C.W. oscillator or a grounded grid R.F. power amplifier at frequencies up to 1200 MHz. Its anode is capable to dissipate 1.5 kW.

TH 297 tetrode is specially well adapted as R.F. power amplifier in broadband television transmitter and in S.S.B. or F.M. services. Due to its linear characteristics TH 297 is also designed for linear amplifier television translator handling both sound and vision signals in a single channel with a crossmodulation level better than 52 dB.

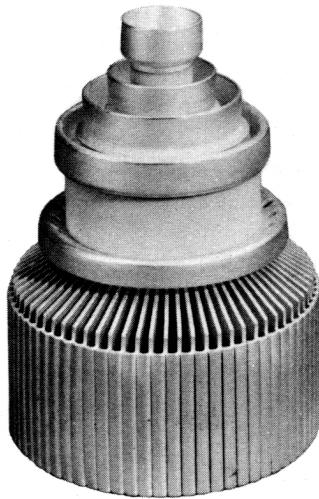

## GENERAL CHARACTERISTICS

### Electrical

Type of cathode .....	thoriated tungsten	
Heating .....	direct	
Heater voltage (1) (2) .....	3.20 + 0.06	V
Heater current, approx. ....	45	A
Peak cathode current .....	5	A
Interelectrode capacitance		
- input (g2 tied to g1) .....	28	pF
- output (g2 tied to g1) .....	6.5	pF
- cathode-anode .....	0.03	pF
Amplification factor g1-g2 avg. ..	6	
Transconductance .....	20 000	$\mu$ mhos

### Mechanical

Mounting position .....	vertical	
Anode cooling .....	forced air	
Minimum airflow (3) .....	1.5	$m^3/mn$
Corresponding pressure drop....	5	millibar
Maximum inlet air temperature..	45	°C
Maximum outlet air temperature.	100	°C
Maximum temperature (4).....	250	°C
Dimensions.....	see drawing	


(1) - For heater voltage application, see note page 4.

(2) - In high frequency operation, the cathode is subjected to considerable back bombardment, which raises its temperature. After the circuit has been adjusted for proper tube operation, the heater voltage must be reduced to prevent over-heating of the cathode with resulting short life.

(3) - 30°C incoming air temperature 1.5 kW anode dissipation.

(4) - At any point of ceramic insulators.

It is necessary to provide air cooling for tube terminals and insulators. This air flow must be established before application of any electrode voltage and maintained during 3 minutes at least after heater voltage has been removed.

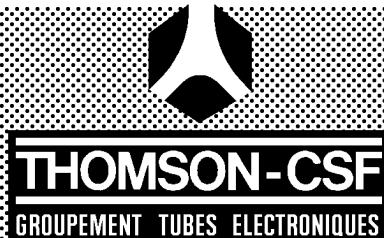

## CLASS B TELEVISION - R.F. POWER AMPLIFIER

Positive grid modulation and negative synchronization

### Maximum ratings

All potentials referred to cathode potential

D. C. anode voltage .....	4.5	kV	Anode dissipation .....	1.5	kW
D. C. grid g2 voltage.....	400	V	Grid g2 dissipation.....	20	W
D. C. grid g1 voltage.....	-250	V	Grid g1 dissipation.....	10	W
Peak cathode current .....	5	A	Frequency .....	1200	MHz
D. C. anode current .....	1.2	A			

### Typical operation

All data given at permanent white level and without synchronization

Frequency .....	860	MHz	D. C. anode current .....	0.9	A
Bandwidth .....	10	MHz	D. C. grid g2 current .....	5	mA
D. C. anode voltage .....	2.8	kV	D. C. grid g1 current .....	50	mA
D. C. grid g2 voltage.....	400	V	Driving power .....	100	W
D. C. grid g1 voltage .....	-100	V	Anode dissipation .....	1.2	kW
R. F. peak driving voltage ...	150	V	Load output power (1) .....	1	kW

(1) - With a 85% circuit efficiency.

## CLASS B TELEVISION - R.F. POWER AMPLIFIER

Negative grid modulation and positive synchronization

### Maximum ratings

All potentials referred to cathode potential

D. C. anode voltage .....	4.5	kV	Anode dissipation .....	1.5	kW
D. C. grid g2 voltage .....	400	V	Grid g2 dissipation.....	20	W
D. C. grid g1 voltage .....	-250	V	Grid g1 dissipation.....	10	W
Peak cathode current .....	5	A	Frequency.....	1200	MHz
D. C. anode current .....	1.2	A			

### Typical operation

Frequency .....	860	MHz	D. C. grid g2 current		
Bandwidth .....	7	MHz	- Synchronizing level ...	10	mA
D. C. anode voltage .....	3.5	kV	- Pedestal level .....	2	mA
D. C. grid g2 voltage.....	400	V	D. C. grid g1 current		
D. C. grid g1 voltage.....	-90	V	- Synchronizing level ...	70	mA
R. F. peak driving voltage			- Pedestal level .....	10	mA
- Synchronizing level ....	150	V	Driving power, approx.		
- Pedestal level .....	110	V	- Synchronizing level ...	130	W
D. C. anode current			- Pedestal level .....	80	W
- Synchronizing level ....	0.9	A	Load output power, approx. (1)		
- Pedestal level .....	0.7	A	- Synchronizing level ...	1.5	kW
			- Pedestal level .....	0.9	kW

(1) - Including power transferred from driver stage, with a 85% circuit efficiency.



**THOMSON-CSF**

GROUPEMENT TUBES ELECTRONIQUES

DATA TEG 2001

**TH 297**

October 1969 - Page 3/8

## CLASS B NARROW BAND F.M. SERVICE-R.F. POWER AMPLIFIER

Grounded grid conditions

### Maximum ratings

All potentials referred to cathode potential

D. C. anode voltage .....	4.5	kV	Anode dissipation .....	1.5	kW
D. C. grid g2 voltage .....	400	V	Grid g2 dissipation .....	20	W
D. C. grid g1 voltage .....	-250	V	Grid g1 dissipation .....	10	W
Peak cathode current .....	5	A	Frequency .....	1200	MHz
D. C. anode current .....	1.2	A			

### Typical operation

D. C. anode voltage .....	3	kV	D. C. anode current .....	0.8	A
D. C. grid g2 voltage .....	300	V	Driving power .....	90	W
D. C. grid g1 voltage .....	-100	V	Anode dissipation .....	1.2	kW
Peak R. F. driving voltage.....	130	V	Load output power (1) .....	1.2	kW

(1) - With a 85% circuit efficiency

## LINEAR AMPLIFIER

SINGLE SIDE BAND SUPPRESSED - CARRIER SERVICE  
TWO TONE MODULATION

### Maximum ratings

All potentials referred to cathode potential

D. C. anode voltage .....	6	kV	Anode dissipation .....	1.5	kW
D. C. grid g2 voltage .....	800	V	Grid g2 dissipation .....	20	W
D. C. grid g1 voltage .....	-250	V	Frequency .....	1200	MHz
Average anode current at peak of envelope .....	1.2	A			

### Typical operation

Class AB<sub>1</sub> - Two tone modulation

D. C. anode voltage .....	5.7	kV	Average grid g2 current at peak of envelope .....	15	mA
D. C. grid g2 voltage .....	700	V	Average grid g2 current .....	10	mA
D. C. grid g1 voltage .....	-135	V	Load impedance .....	3800	Ω
Zero signal anode current .....	0.3	A	Circuit efficiency .....	90	%
Average anode current at peak of envelope .....	0.8	A	Average load power .....	1.1	kW
Average anode current .....	0.55	A	Load peak envelope power .....	2.2	kW

## CLASS A - LINEAR AMPLIFIER FOR T.V. TRANSLATOR

HANDLING BOTH SOUND AND VISION SIGNALS  
 IN A SINGLE CHANNEL-C.C.I.R. SPECIFICATIONS

### Maximum ratings

All potentials referred to cathode potential

D. C. anode voltage .....	4.5	kV	D. C. anode current .....	1	A
D. C. grid g2 voltage .....	650	V	Anode dissipation .....	1.5	kW
D. C. grid g1 voltage .....	-250	V	Grid g2 dissipation .....	20	W
Peak cathode current .....	3	A	Frequency .....	1200	MHz

### Typical operation

Frequency .....	780	MHz	D. C. anode current .....	0.35	A
Heater voltage .....	3	V	Gain .....	13	dB
D. C. anode voltage .....	3.5	kV	Video power .....	250	W
D. C. grid g2 voltage .....	600	V	Crossmodulation level (3 tones test) .....	$\leq 52$	dB *
D. C. grid g1 voltage .....	-90	V			

\* - under video level

## TUBE PROTECTION AND FEEDING INSTRUCTIONS

In order to achieve long tube life, maximum operating efficiency and circuit stability consistent with the full tube capability, the following instructions should be strictly observed.

### I - ELECTRODES FEEDING ORDER - Apply successively :

1. -  $\frac{1}{2}$  Vf (filament voltage) during 60 seconds
2. - Nominal Vf during 60 seconds
3. - Grid bias
4. - Anode voltage
5. - Screen voltage
6. - Driving voltage

### II - SECURITY DEVICES AGAINST ANODE, SCREEN, GRID OVERCURRENTS -

1. - Overcurrents due to unproper utilisation conditions : the protection can be achieved by 3 relays in series, respectively in grid, screen and anode circuits. These relays are adjusted so as to operate when a current equal to 1.5 I<sub>max</sub> is attained, I<sub>max</sub> being the normal current used in the considered operating conditions. When one of these relays operate, the driving voltage and the screen and anode voltages are simultaneously cut-off.


2. - Overcurrent due to stray oscillations or electrode arcings : the protection can be made by the use of 3 rapid cut-off security devices (grid, screen, anode), acting for a current equal to 5 I<sub>max</sub>, I<sub>max</sub> being the normal current used in the considered operating conditions. Each of these 3 systems acting on the 2 others should short-circuit driving, screen and anode voltages and eventually grid bias voltage with a total delay lower than 30 microseconds.


### III - MONITORING DEVICE FOR OVERTEMPERATURE OF OUTLET COOLING AIR :

The temperature of outlet air coming from the anode cavity must not exceed 100°C. The temperature rises when the cavity is not properly adjusted and it is necessary to provide a monitoring device so as to prevent the user from unproper adjustment. On the other hand, this device allows the user to be sure that the air evacuation system (generally made by the user) is well adapted to the equipment.



CONSTANT CURRENT CHARACTERISTICS  
 $V_{g2} = 400$  V

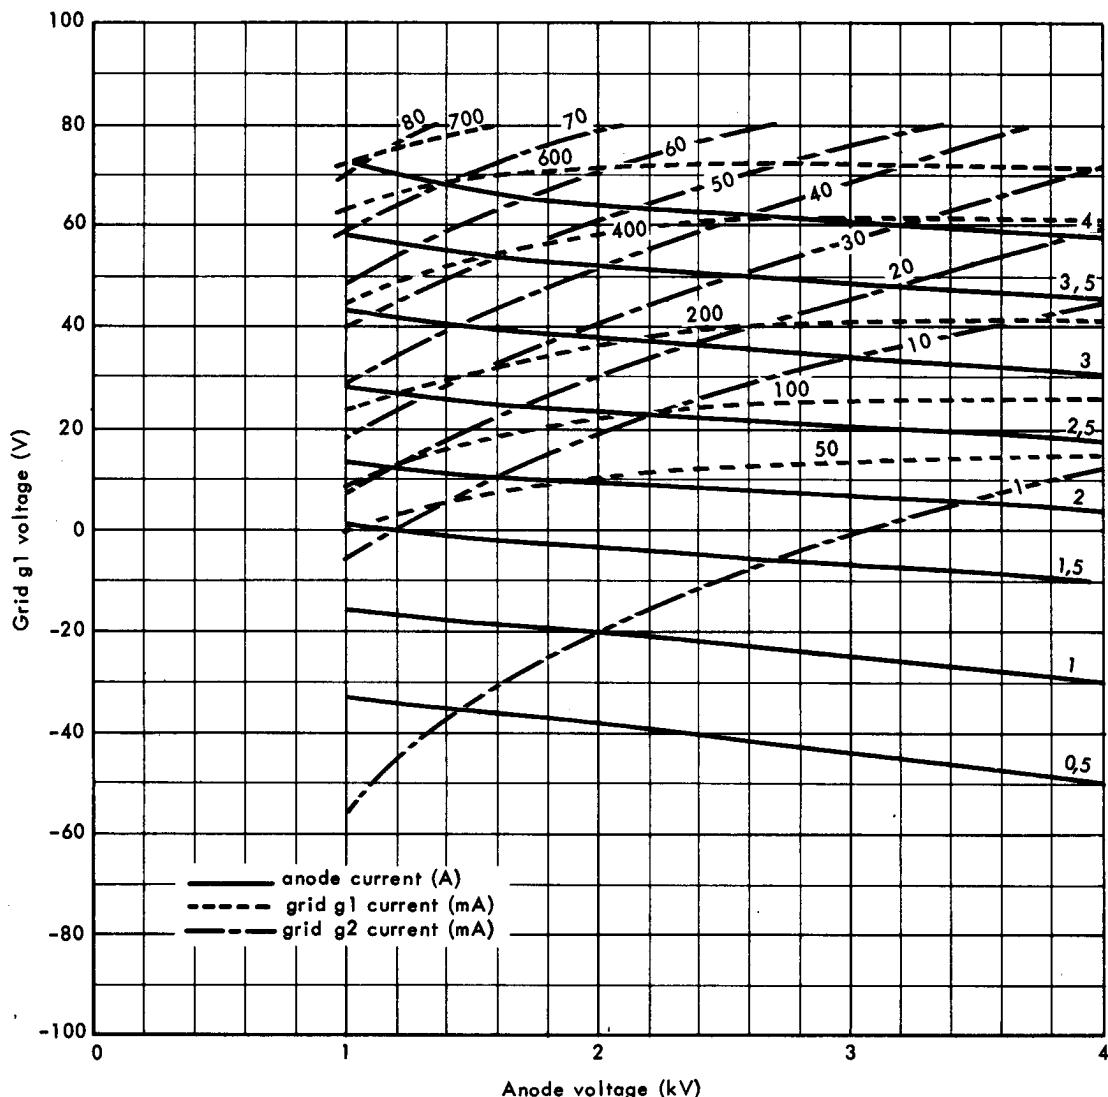

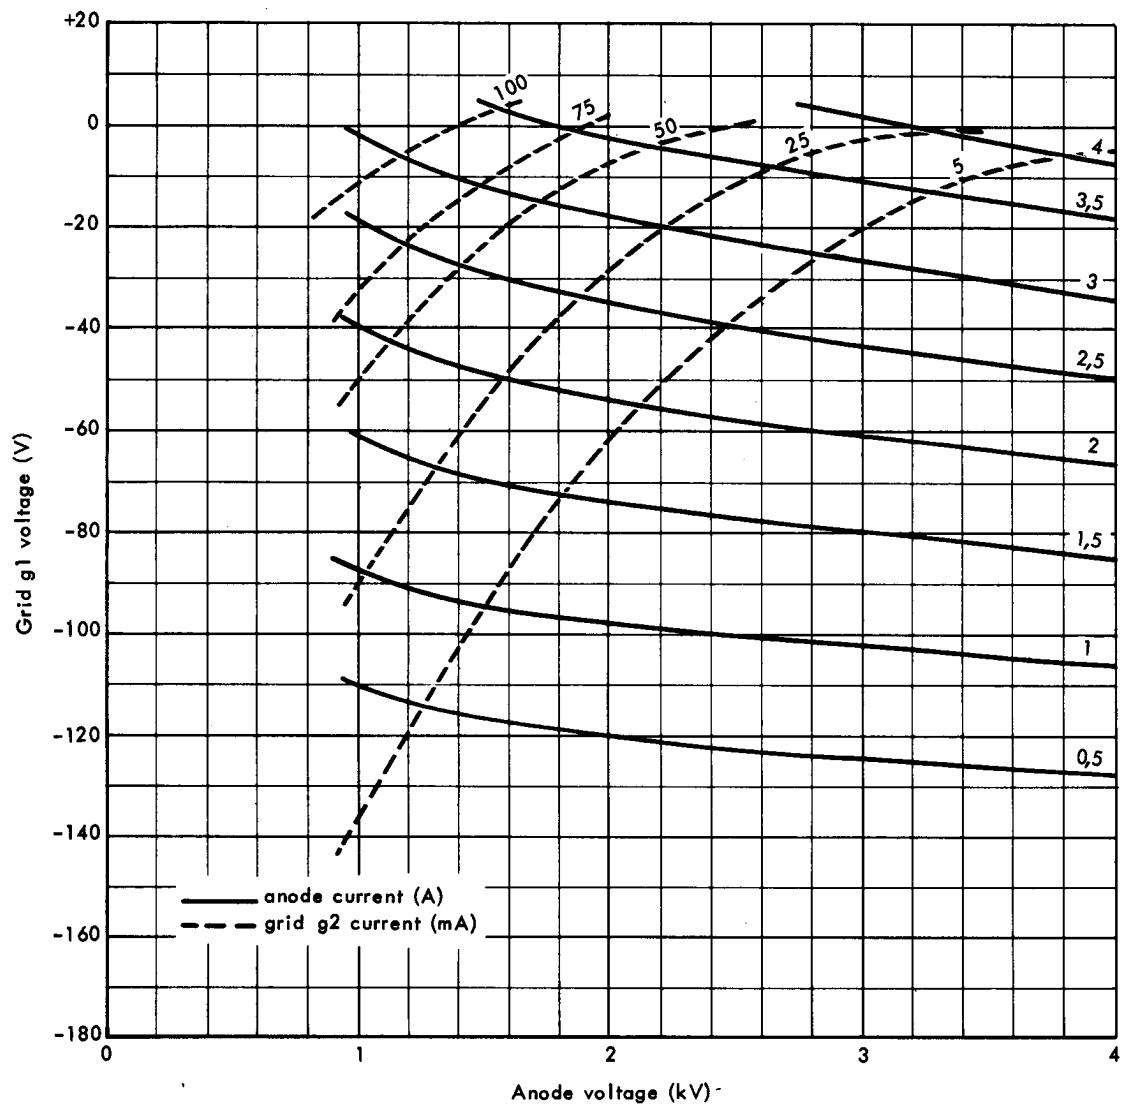
 CONSTANT CURRENT CHARACTERISTICS  
 $V_{g2} = 800 \text{ V}$ 




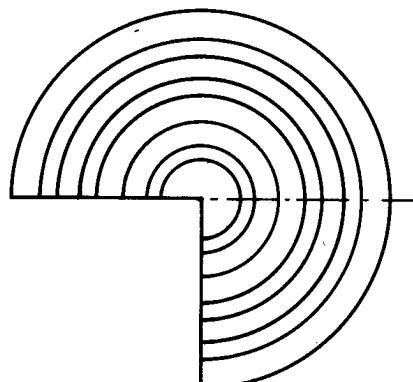
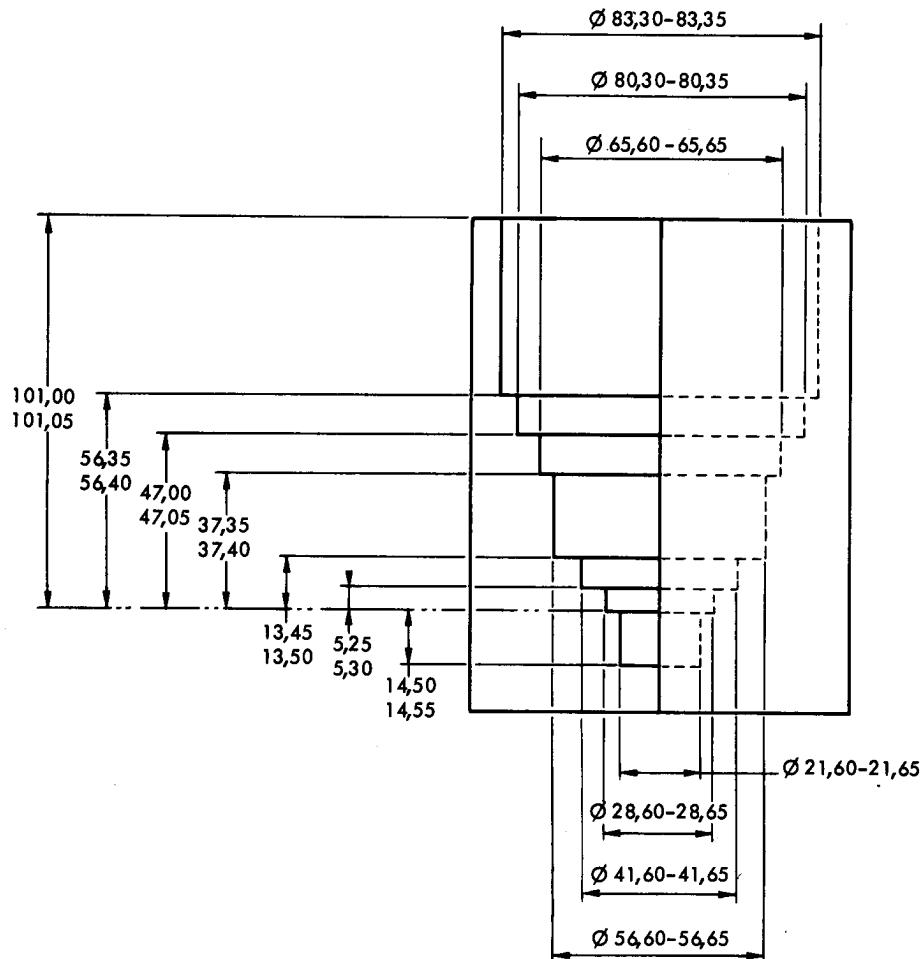
**THOMSON-CSF**  
GROUPEMENT TUBES ELECTRONIQUES

DATA TEG 2001


**TH 297**

October 1969 - Page 7/8

## GAUGE



Dimensions in mm.






# **THOMSON-CSF**

GROUPEMENT TUBES ELECTRONIQUES

## **OUTLINE DRAWING**

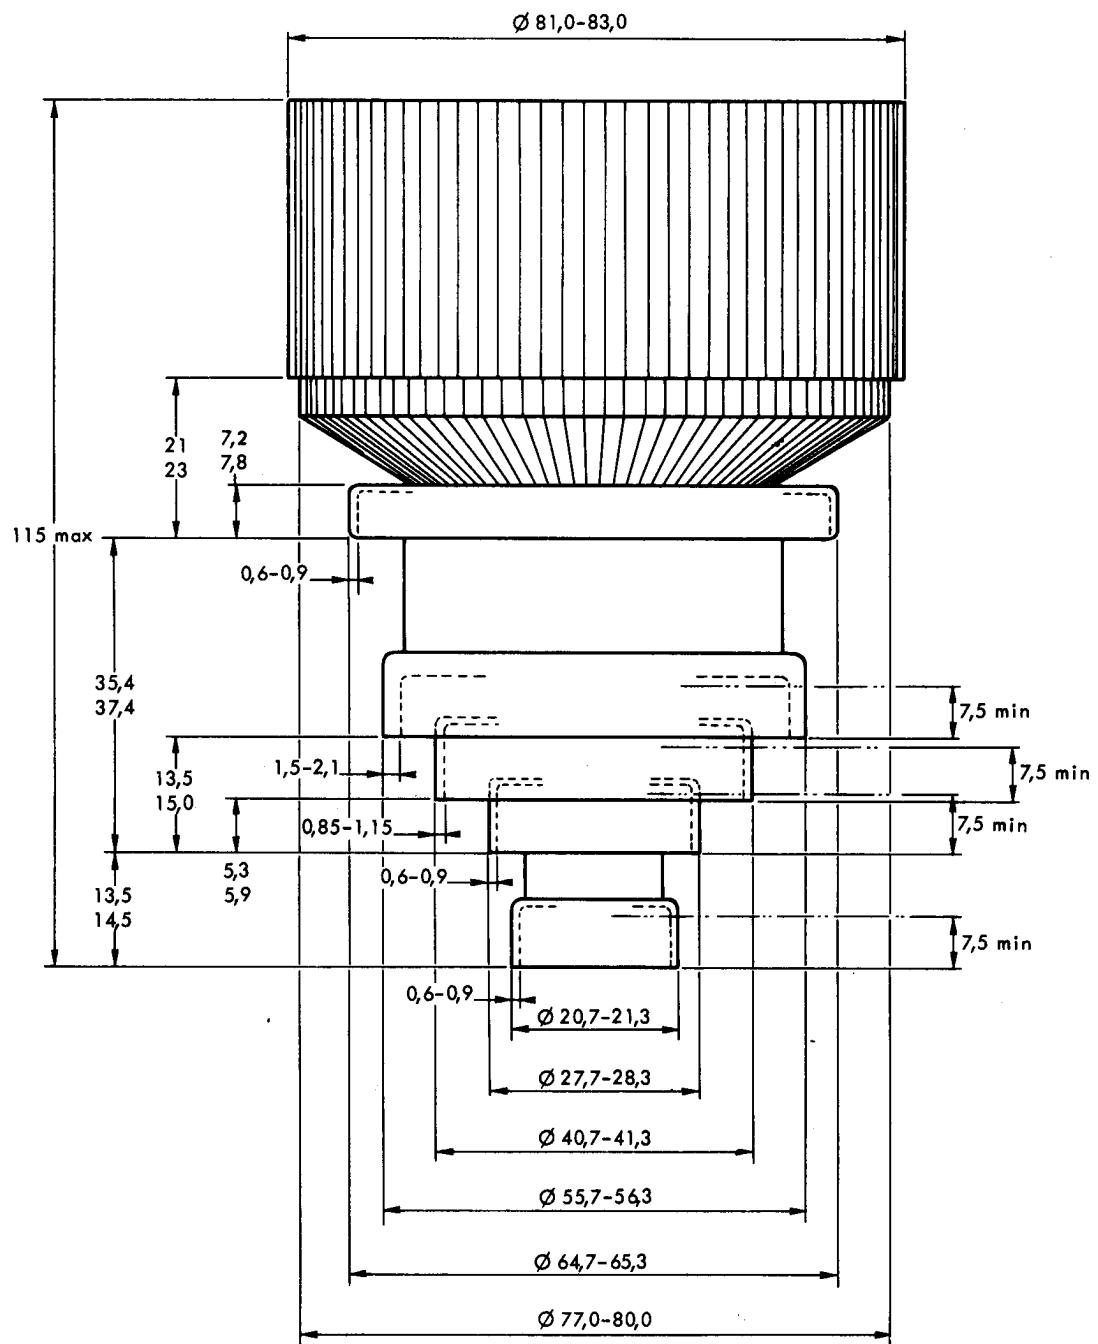

Dimensions in mm

