



High vacuum HALF-WAVE RECTIFIER
REDRESSEUR MONOPLAQUE à vide poussé
Hochvakuum EINWEGGLEICHRICHTER

Heating: direct by A.C.;
parallel supply
Chauffage: direct par C.A.; Vf = 4 V
alimentation en parallèle If = 1,3 A
Heizung: direkt durch Wechselstrom;
Parallelspeisung

Dimensions in mm
Dimensions en mm
Abmessungen in mm



Operating conditions and limiting values
Caractéristiques d'utilisation et limites
Betriebs- und Grenzdaten

Vtr = max. 1000 V_{eff}



I_o = max. 75 mA

Rt = min. 200 Ω

C = max. 12 μF

4646

"Miniwatt"

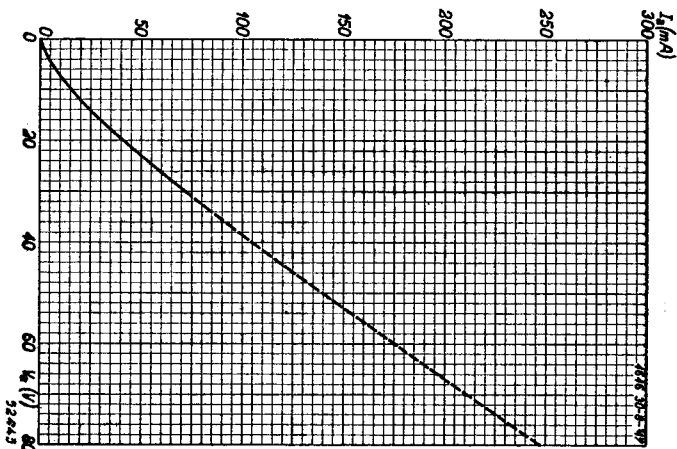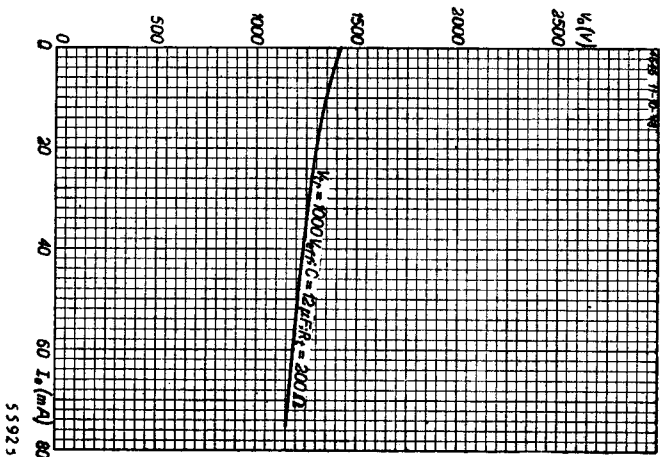

PHILIPS



*Electronic
Tube*

HANDBOOK

	4646	
page	sheet	date
1	1	1948.09.15
2	2	1948.11.08
3	FP	1999.06.07