



High vacuum FULL WAVE RECTIFYING VALVE
 TUBE REDRESSEUR BIPLAQUE à vide poussé
 Hochvakuum VOLLWEGGLEICHRICHTERROHRE

Heating: direct by A.C.
 Chauffage: direct par C.A.
 Heizung: direkt durch Wechselstrom

$V_f = 4,0 \text{ V}$
 $I_f = 0,72 \text{ A}$

Dimensions in mm
 Dimensions en mm
 Abmessungen in mm





Base, culot, Fuss: Rimlock

Operating characteristics and limiting values
 Caractéristiques d'utilisation et caractéristiques limites
 Betriebs- und Grenzdaten

$V_{tr} =$	2x300	2x400	max. 2x500 V_{eff}
$I_o =$	max. 70	max. 60	max. 60 mA
$C_{filt} =$	max. 50	max. 50	max. 50 μF
$R_t =$	min. 2x100	min. 2x150	min. 2x200 Ω

AZ 41

PHILIPS

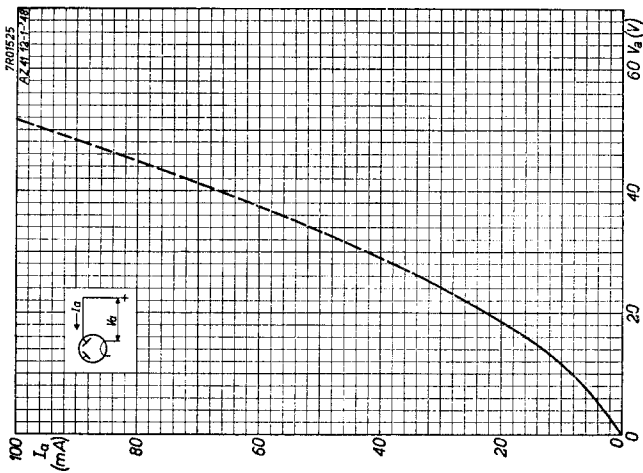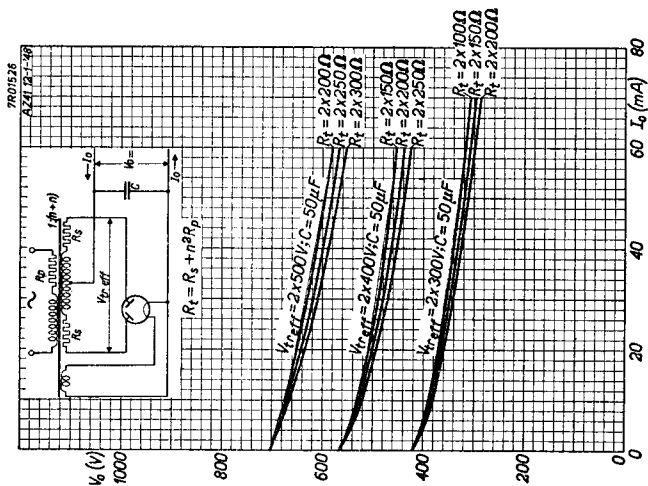

PHILIPS



*Electronic
Tube*

HANDBOOK

page	AZ41 sheet	date
1	1	1953.06.06
2	A	1953.06.06
3	FP	1999.06.26