

ADIRALTY SURFACE WEAPONS ESTABLISHMENT
MINISTRY OF SUPPLY (S.R.D.E.)

Specification MOS CV2224/Issue 4				SECURITY	
Dated:- 26.3.53.				Specification	Valve
To be read in conjunction with K1001				Unclassified	Unclassified
—> indicates a change					
<u>TYPE OF VALVE:-</u> High Speed Primed Trigger Tube <u>CATHODE:-</u> Cold <u>ENVELOPE:-</u> Glass, unmetallised <u>PROTOTYPE:-</u> G1/371K				<u>MARKING</u> See K1001/4	
<u>RATING</u> <u>MAIN ELECTRODE</u>				<u>BASE</u> B7G	
Note				Pin	Electrode
Max. Pulse Current Output (mA)	15			1	Priming Gap Cathode
Max. D.C. Current Output (mA)	10			2	Cathode
Min. D.C. Current Output (mA)	2			3	Shield
Anode Supply Voltage (V)	270 to 360			4	Anode
Main Gap Maintaining Voltage (V)	175 to 185	A		5	Shield
Max. Cathode Voltage Output (V)	140			6	Trigger
Shield Voltage (V)	150	B		7	Priming Gap Anode
Trigger Bias (Va up to 325 V.) (V)	0 to 165			<u>DIMENSIONS</u> See K1001/A1/D4	
Trigger Bias (Va up to 360V.) (V)	60 to 165			Dimensions	Min. Max.
Trigger Breakdown Potential (V)	12 to 26	C		A mm.	54
De-ionisation Time (max.) (μS)	30	D		B mm.	19.1
Transfer Time (nom.) (μS)	0.5	E		F mm.	40.5
Trigger Pulse Width	See Note F	F		L mm.	47.6
<u>PRIMING GAP</u>				<u>CAPACITANCES (pF)</u> Trigger to Cathode 3.0 Trigger to all other electrodes 5.0	
Priming Gap Current (mA)	0.2 to 0.5	G			
Anode Feed Resistance (KΩ)	390				
Cathode Resistance to Main Gap Cathode Potential (KΩ)	56				

CV 2224

NOTES

- A. To be measured directly between the main gap anode and cathode, with the priming anode left floating.
- B. Applied through 50,000 ohms.
- C. With a 25 micro-second square pulse applied based on maximum bias.
- D. De-ionisation time should be short enough to permit a re-application of the nominal working voltage (90 per cent of maximum, i.e. 325 volts) 30 micro-seconds after the extinguishing of a D.C. discharge of maximum rated current by means of a rectangular pulse applied to the anode. The base of the extinguishing pulse should be 20 volts below the V_m of the main gap. All other electrodes may be at potentials within their working range.
- E. This is the time interval between current flowing in the trigger cathode circuit as the result of applying a trigger pulse, and conduction starting in the main anode-cathode gap.
- > F. In use, any pulse width greater than 3 micro-seconds can be applied, provided the amplitude is sufficient and the input circuit suitable. The effective triggering pulse amplitude is a function of pulse width below 25 micro-seconds. For pulse widths greater than 25 micro-seconds, the amplitude is approximately constant at the test value.
- G. The priming gap cathode must not be more than 140 volts negative to the main cathode at any time.

TESTS

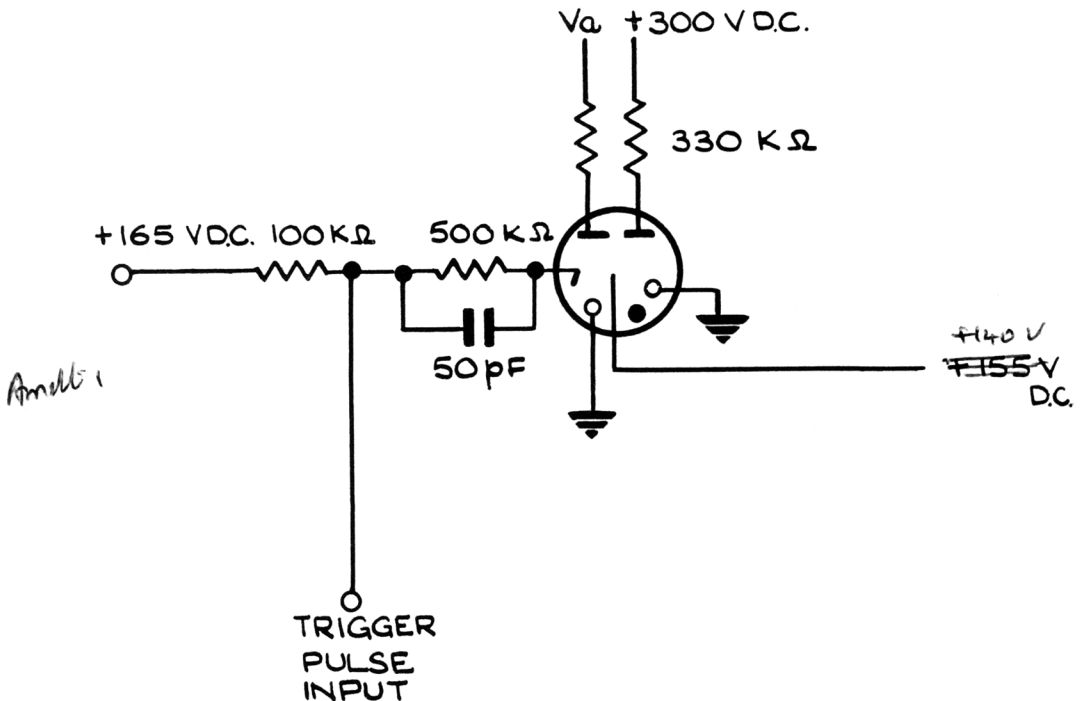
CV 2224

To be performed in addition to those applicable in K1001

	Test Conditions					Test	Limits		Notes
							Min.	Max.	
	Trigger Voltage	Trigger Series Res. K Ω	Va	Anode Res. K Ω	Ia mA				
a	Connect to anode thro' 1 M Ω	-	Record	Adj.	10	Main Gap Maintaining Voltage (V)	172	188	1 & 2
b	Connected to Cathode	0	Record	100	-	Main Gap Ignition Voltage (V)	320	-	2 & 3
c	+60 D.C.	22	Record	100	-	Main Gap Ignition Voltage (V)	365	-	2 & 3
d	Floating	-	300	33	-	Priming Gap Current (mA)	0.22	0.53	2 & 3
e	<p>Refer to the test circuit shown below. To the trigger connect a 500 KΩ resistance and in series with this a 100 KΩ resistance. Connect a 50 pF condenser across the 500 KΩ. To the free end of the 100 KΩ resistance connect a +165 volt D.C. bias voltage. To the junction of the two resistances apply a substantially rectangular pulse of +11 volts amplitude and 25 μs width at a P.R.F. of 100 p.p.s.</p>					Main Gap Hold-off	The Main Gap shall not break down		2 & 3 ←
f	<p>Use the same bias and input conditions as under e. To the junction of the two resistances apply a single substantially rectangular pulse of +27 volts amplitude and 25 μs width.</p>					Main Gap Breakdown	The Main Gap shall break down.		2 & 3

NOTES

1. The maintaining voltage shall be measured directly between the main gap anode and cathode, with the priming anode left floating.
2. For this test the shield shall be maintained at a voltage of ~~+155~~ volts and the cathodes shall be earthed.
Amplitude
Time
3. For this test the priming gap anode shall be connected in series with 330 K Ω to +300 volts.

TEST CIRCUIT

ELECTRONIC VALVE SPECIFICATIONS
SPECIFICATION MOS/CV2224 ISSUE 4 DATED 26th MARCH 1953
AMENDMENT NO. 1

- (i) Page 1 Amend "Ministry of Supply (S.R.D.E.)" to read
"Admiralty Surface Weapons Establishment".
Amend "Specification MOS/CV2224" to read
"Specification AD/CV2224".
- (ii) Page 4 Note 2 Amend "+155 volts" to read "+140 volts".
Test Circuit Amend shield voltage "+155V D.C." to
to read "+140V D.C."

August, 1965.

T.V.C. for A.S.W.E.

N(319470)

VAP
15/1/65