

This information is derived from development samples made available for evaluation. It does not necessarily imply that the device will go into regular production.

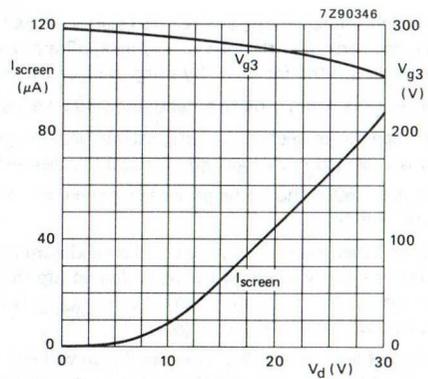


Fig. 5 Screen current ( $I_{screen}$ ) and focusing voltage ( $V_{g3}$ ) as a function of grid drive voltage ( $V_d$ ); typical curves.

INSTRUMENT CATHODE-RAY TUBE

- mono accelerator
- 12 cm diagonal rectangular flat face
- dynamic deflection defocusing correction
- internal magnetic correction for astigmatism, vertical eccentricity and orthogonality
- low heater power consumption
- for portable oscilloscopes with up to 25 MHz bandwidth, and read-out devices

QUICK REFERENCE DATA

Accelerator voltage	$V_{g2,g4,g5(l)}$	2000	V
Minimum useful scan area		80 mm x 64	mm
Deflection coefficient			
horizontal	$M_x$	32	V/cm
vertical	$M_y$	21	V/cm

OPTICAL DATA

Screen	
type	GY, colour green
persistence	medium short
Useful screen area	$\geq 82$ mm x 66 mm; note 1
Useful scan area	$\geq 80$ mm x 64 mm
Internal graticule	type 119; see Fig. 4

HEATING

Indirect by a.c. or d.c.*	
Heater voltage	$V_f$ 6,3 V
Heater current	$I_f$ 0,1 A
Heating time to attain 10% of the cathode current at equilibrium conditions	approx. 7 s

blue binder, tab 4

9397 004 40142

\* Not to be connected in series with other tubes.

**MECHANICAL DATA****Dimensions and connections** (see also outline drawing)

Overall length (socket included)  $\leq 257$  mm  
 Faceplate dimensions  $98 \pm 0,5$  mm x  $82 \pm 0,5$  mm

Net mass approx. 0,7 kg

Base 12-pin, all glass, JEDEC B12-246

**Mounting**

The tube can be mounted in any position. It must not be supported by the socket and not by the base region alone. The reference points on adjoining edges of the faceplate (see Fig. 4) enable the tube to be mounted accurately in the front panel, thus providing optimum alignment of the internal graticule.

**Accessories**

Socket with solder tags type 55594  
 Socket with printed-wiring pins type 55595

**NOTES**

- As the frit seal is visible through the faceplate, and not necessarily aligned with the internal graticule, application of an external passe-partout with open area of max. 82 mm x 66 mm is recommended. The internal graticule is aligned with the faceplate by using the faceplate reference points (see Fig. 4).
- The mean x-plate potential and the mean y-plate potential should be equal to  $V_{g2,g4,g5(l)}$ .
- The tube features internal magnetic correction for astigmatism, orthogonality and eccentricity calibration. Optimum spot is obtained if  $V_{g2,g4,g5(l)}$  is equal to mean y-potential.
- An actual focus range of approx. 50 V should be provided on the front panel.  $V_{g3}$  decreases with increasing grid drive (see also Fig. 5).
- Intensity control on the front panel should be limited to the maximum useful screen current (approx. 80  $\mu$ A; see also Fig. 5). It is to be adjusted either by the grid drive (up to 30 V) or for maximum acceptable line width. The corresponding cathode current or  $I_{g2,g4,g5}$  (up to 500  $\mu$ A) depend on the cut-off voltage and cannot be used for control settings.
- The sensitivity at a deflection of less than 75% of the useful scan will not differ from the sensitivity at a deflection of 25% of the useful scan by more than the indicated value.
- A graticule consisting of concentric rectangles of 80 mm x 64 mm and 78,3 mm x 62,3 mm is aligned with the internal graticule. With optimum trace rotation correction the edges of a raster will fall between these rectangles.
- The tube has a trace rotation coil, fixed onto the lower cone part. The coil has 1000 turns and a typical resistance of  $180 \pm 25 \Omega$  at 20 °C, which increases by 0,4%/K for rising temperature. Approx. 6 mA causes 1° trace rotation. Thus maximum required voltage is approx. 12 V for tube tolerances ( $\pm 5^\circ$ ) and earth magnetic field with reasonable shielding ( $\pm 2^\circ$ ).
- Measured with the shrinking raster method within the useful scan under typical operating conditions, adjusted for optimum focus and dynamic correction applied.

As the construction of the tube does not permit a direct measurement of the beam current, this current should be determined as follows:

- Under typical operating conditions, apply a small raster display (no overscan), adjust  $V_{g1}$  for a beam current of approx. 10  $\mu$ A and adjust  $V_{g3}$  for smallest spot size at the centre of the screen. When measuring the beam current, grid 6 should be connected to  $g2$ -potential and the diodes should be disconnected from the x-plates.
- Under these conditions, but without raster, the deflection plate voltages should be changed to:  $V_{y1} = V_{y2} = 2000$  V;  $V_{x1} = 1300$  V;  $V_{x2} = 1700$  V, thus directing the total beam current to  $x_2$ . Measure the current on  $x_2$  and adjust  $V_{g1}$  for  $I_{x2} = 10 \mu$ A.
- Set again for the conditions under a), without touching the  $V_{g1}$  control. The screen current of the resulting raster display is now 10  $\mu$ A. Adjust  $V_{g3}$  for optimum focus in the centre of the screen and apply dynamic correction to grid 6 for optimum vertical line width.

DEVELOPMENT SAMPLE DATA



## TYPICAL OPERATION (voltages with respect to cathode)

Conditions				note 2
Accelerator voltage	$V_{g2,g4,g5,(l)}$	2000	V	
Astigmatism control voltage	$\Delta V_{g2,g4,g5,(l)}$	0	V	note 3
Focusing voltage	$V_{g3}$	220 to 360	V	note 4
Cut-off voltage for visual extinction of focused spot	$-V_{g1}$	22 to 65	V	note 5

## Performance

Deflection coefficient	horizontal	$M_x$	$\leq$ 32	V/cm	
			$\leq$ 35	V/cm	
vertical	$M_y$	$\leq$ 21	V/cm		
		$\leq$ 23	V/cm		
Deviation of deflection linearity		$\leq$ 2	%	note 6	
Geometry distortion		see note 7			
Eccentricity of undeflected spot with respect to internal graticule	horizontal	$\leq$ 4	mm	note 3	
	vertical	$\leq$ 2	mm	note 3	
Angle between x and y-traces		90°		note 3	
Angle between x-trace and x-axis of the internal graticule		$\leq$ 5°		note 8	
Grid drive voltage for 10 $\mu$ A screen current	$V_d$	$\approx$ 11	V	note 5	
Line width	l.w.	$\approx$ 0,2	mm	note 9	

## LIMITING VALUES (Absolute maximum rating system)

Accelerator voltage	$V_{g2,g4,g5,(l)}$	max.	2200	V	
Focusing voltage	$V_{g3}$	max.	2200	V	
Voltage between accelerator electrode and grid 6	$V_{g2/g6}$	max.	$\pm$ 500	V	
Voltage between accelerator electrode and any deflection plate	$V_{g2/x/y}$	max.	$\pm$ 500	V	
Control grid voltage	$-V_{g1}$	max.	200	V	
		min.	0	V	
Cathode to heater voltage	positive	$V_{kf}$	max.	125	V
			negative	$-V_{kf}$	max.
Heater voltage	$V_f$	max.	6,6	V	
		min.	6,0	V	
Grid drive voltage, averaged over 1 ms	$V_d$	max.	20	V	
Screen dissipation	$W_{\ell}$	max.	3	mW/cm <sup>2</sup>	
Control grid circuit resistance	$R_{g1}$	max.	1	M $\Omega$	

## FOCUSING

electrostatic

## DEFLECTION

double electrostatic

x-plates

symmetrical

y-plates

symmetrical

If use is made of the full deflection capabilities of the tube the deflection plates will block part of the electron beam, hence a low impedance deflection plate drive is desirable.

## DYNAMIC DEFLECTION DEFOCUSING CORRECTION

The tube has a special electrode, positioned between the x and y-plates, for dynamic correction of deflection defocusing, to improve the uniformity of the extremely good line width up to the screen edges. If use is made of this dynamic correction, a negative voltage proportional to, and approx. 50% of, the negative horizontal deflection plate voltage should be applied to this electrode (grid 6).

The correction-circuit impedance must be  $\leq$  100 k $\Omega$ . To prevent distortion, the output impedances of the x-amplifiers should be  $\leq$  10 k $\Omega$ .

If no correction is required, grid 6 should be connected to mean x-plate potential ( $V_{g2(\ell)}$ ).

## CAPACITANCES (approx. values)

$x_1$ to all other elements except $x_2$	$C_{x1(x2)}$	4,5	pF
$x_2$ to all other elements except $x_1$	$C_{x2(x1)}$	4,5	pF
$y_1$ to all other elements except $y_2$	$C_{y1(y2)}$	3,5	pF
$y_2$ to all other elements except $y_1$	$C_{y2(y1)}$	3,5	pF
$x_1$ to $x_2$	$C_{x1x2}$	2	pF
$y_1$ to $y_2$	$C_{y1y2}$	1	pF
Control grid to all other elements	$C_{g1}$	6	pF
Cathode to all other elements	$C_k$	2,7	pF
Grid 6 to all other elements	$C_{g6}$	11	pF

DEVELOPMENT SAMPLE DATA



DIMENSIONS AND CONNECTIONS

Dimensions in mm

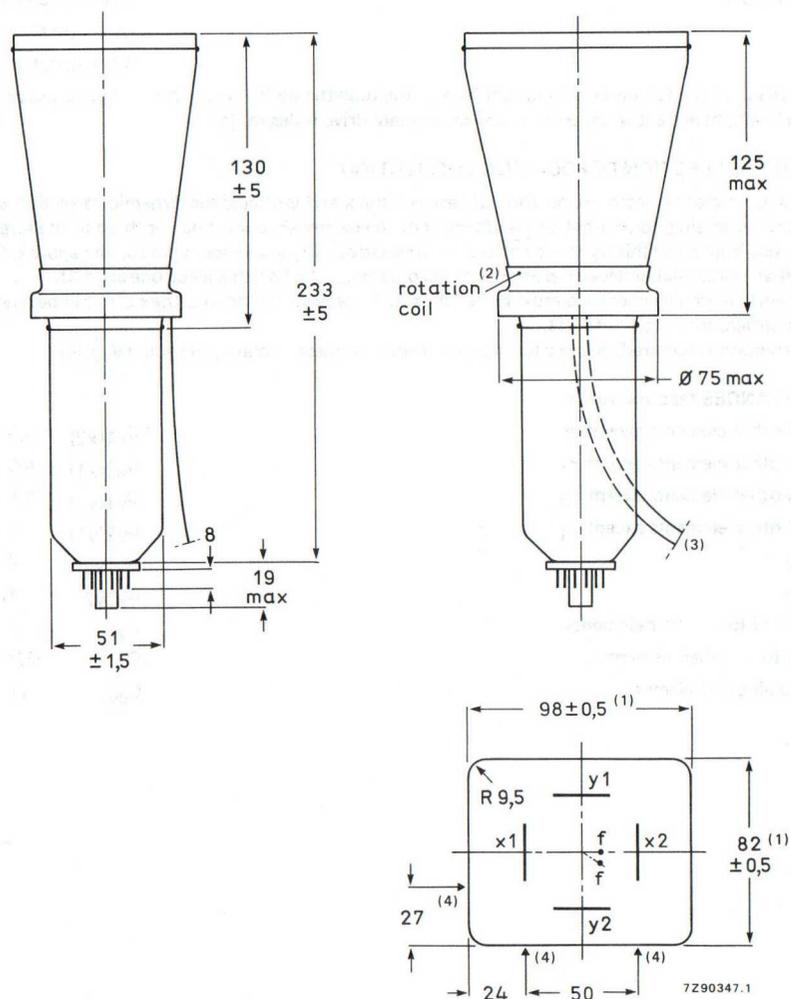


Fig. 1 Outlines.

- (1) Dimensions of faceplate only. The complete assembly of faceplate and cone (frit seal included) will pass through an opening of 101 mm x 85 mm.
- (2) The coil is fixed to the envelope with resin and adhesive tape.
- (3) The length of the connecting leads of the rotation coil is min. 350 mm.
- (4) Reference points on faceplate for graticule alignment (see Fig. 4).

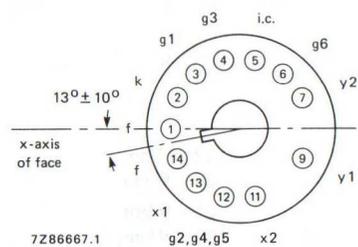


Fig. 2 Pin arrangement; bottom view.

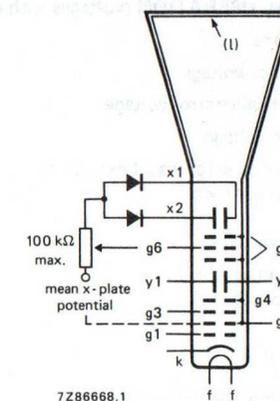


Fig. 3 Electrode configuration.

DEVELOPMENT SAMPLE DATA

Internal graticule

The internal graticule is aligned with the faceplate by using the faceplate reference points A1, A2 and A3, see Fig. 4. See also note 1.

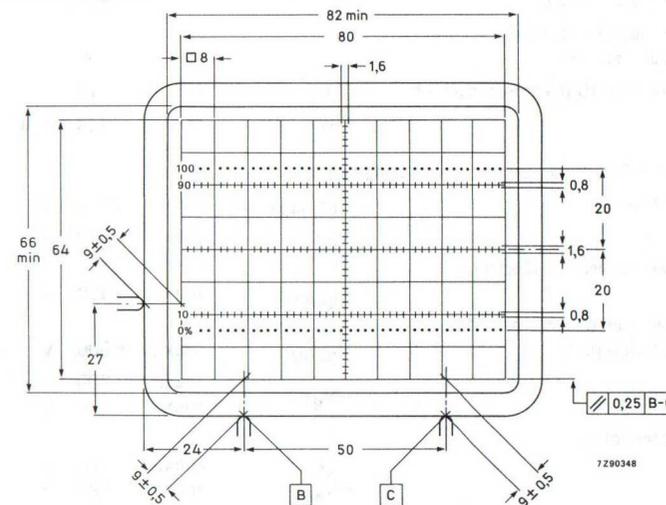


Fig. 4 Front view of tube with internal graticule, type 119.  
Line thickness = 0,2 mm;  
dot diameter = 0,4 mm;  
colour: red.