

Eimac
EITEL-McCULLOUGH, INC.
 SAN BRUNO, CALIFORNIA

3W5000A3

MEDIUM MU TRIODE

The Eimac 3W5000A3 is a water-cooled, medium-mu transmitting triode with a maximum plate dissipation rating of 5000 watts. Relatively high power-output as an oscillator, amplifier or modulator may be obtained from this tube at low plate voltages. A single tube will deliver a radio frequency output of 7500 watts at 4000 volts at frequencies up to 110 Mc.

The tube has a rugged, low-inductance cylindrical filament-stem structure, which readily becomes a part of a linear filament-tank circuit for VHF operation. The grid provides thorough shielding between the input and output circuits for grounded-grid applications and is conveniently terminated in a ring between the plate and filament terminals.

NOTE: THE 3W5000A3 IS A WATER-COOLED VERSION OF THE AIR-COOLED 3X2500A3.

The plate dissipation of the 3W5000A3 is 5000 watts. Other ratings are the same as for the 3X2500A3 tube type.

The 3W5000A3 should be used where water cooling is preferred and for industrial applications or installations where reserve anode dissipation is desired.

GENERAL CHARACTERISTICS

ELECTRICAL

Filament: Thoriated tungsten	
Voltage - - - - -	7.5 volts
Current - - - - -	51 amperes
Amplification Factor (Average) - - - - -	20
Direct Interelectrode Capacitances (Average)	
Grid-Plate - - - - -	20 $\mu\mu\text{f}$
Grid-Filament - - - - -	36 $\mu\mu\text{f}$
Plate-Filament - - - - -	1.2 $\mu\mu\text{f}$
Transconductance ($i_b = 830$ ma., $E_b = 3000$ v.) - - - - -	20,000 umhos
Frequency for Maximum Ratings - - - - -	75 Mc.

MECHANICAL


Base - - - - -	see drawing
Mounting - - - - -	Vertical, base down or up
Maximum Overall Dimensions:	
Length - - - - -	12.56 inches
Diameter - - - - -	3.63 inches
Net Weight - - - - -	3.5 pounds
Shipping Weight (Average) - - - - -	15 pounds
Cooling - - - - -	Water and Forced Air

The water-cooled anode requires one gallon of cooling water per minute for the rated plate dissipation of 5 kilowatts. The outlet water temperature must not exceed a maximum of 70°C. under any conditions. The inlet water pressure must not exceed a maximum of 60 pounds per square inch. The pressure drop across the anode is negligible compared to the drop in the associated piping.

The grid-terminal contact surface and adjacent glass must be cooled by forced air. The quantity, velocity and direction must be adjusted to limit the maximum seal temperature to 150°C.

The filament stem structure also requires forced-air cooling. A minimum of 6 cubic feet per minute must be directed into the space between the inner and outer filament contacting surfaces.

Air and water flow must be started before filament power is applied and maintained for at least five minutes after the filament power has been removed.

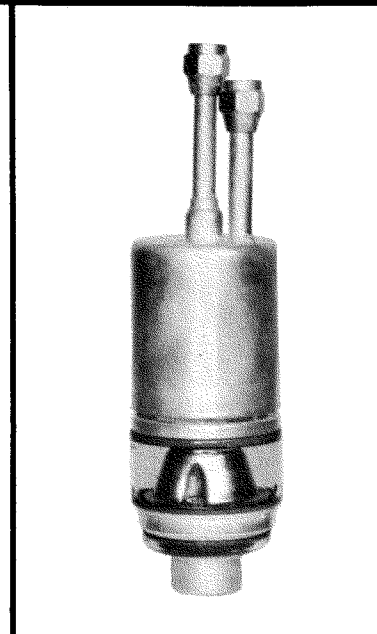

RADIO FREQUENCY POWER AMPLIFIER OR OSCILLATOR

(Conventional Neutralized Amplifier—Frequencies below 75 Mc.)

Class-C FM or Telegraphy (Key-down conditions, per tube)

MAXIMUM RATINGS

D-C PLATE VOLTAGE - - - - -	6000 MAX. VOLTS
D-C PLATE CURRENT - - - - -	2.5 MAX. AMPS
PLATE DISSIPATION - - - - -	5000 MAX. WATTS
GRID DISSIPATION* - - - - -	150 MAX. WATTS

TYPICAL OPERATION (Frequencies below 75 Mc., per tube)

D-C Plate Voltage - - - - -	4000	5000	6000	Volts
D-C Plate Current - - - - -	2.5	2.5	2.08	Amps
D-C Grid Voltage - - - - -	-300	-450	-500	Volts
D-C Grid Current - - - - -	245	265	180	Ma.
Peak R-F Grid Input Voltage - - - - -	580	750	765	Volts
Driving Power (approx.) - - - - -	142	197	136	Watts
Grid Dissipation - - - - -	68	78	46	Watts
Plate Power Input - - - - -	10,000	12,500	12,500	Watts
Plate Dissipation - - - - -	2500	2500	2500	Watts
Plate Power Output - - - - -	7500	10,000	10,000	Watts

*See application notes.

RADIO FREQUENCY POWER AMPLIFIER

Grounded-Grid Circuit
Class-C FM Telephony

MAXIMUM RATINGS (Frequencies between 85 and 110 Mc.)

D-C PLATE VOLTAGE	4000 MAX. VOLTS
D-C PLATE CURRENT	2.0 MAX. AMPS
D-C GRID CURRENT*	200 MAX. MA.
PLATE DISSIPATION	5000 MAX. WATTS
GRID DISSIPATION*	150 MAX. WATTS

*See application notes.

TYPICAL OPERATION (110 Mc., per tube)

D-C Plate Voltage	3700	4000	Volts
D-C Grid Voltage	-450	-500	Volts
D-C Plate Current	1.8	1.85	Amps
D-C Grid Current	190	190	Ma.
Driving Power (approx.)	1600	1900	Watts
Useful Power Output	6850	7500	Watts

PLATE MODULATED RADIO FREQUENCY AMPLIFIER

(Conventional Neutralized Amplifier—Frequencies below 75 Mc.)
Class-C Telephony (Carrier conditions, per tube)

MAXIMUM RATINGS

D-C PLATE VOLTAGE	5000 MAX. VOLTS
D-C PLATE CURRENT	2.0 MAX. AMPS
PLATE DISSIPATION	3350 MAX. WATTS
GRID DISSIPATION	150 MAX. WATTS

TYPICAL OPERATIONS (Frequencies below 75 Mc., per tube)

D-C Plate Voltage	4000	4500	5000	Volts
D-C Plate Current	1.67	1.55	1.45	Amps
Total Bias Voltage	-450	-500	-550	Volts
Fixed Bias Voltage	-230	-325	-410	Volts
Grid Resistor	1500	1500	1400	Ohms
D-C Grid Current	150	120	100	Ma.
Peak R-F Grid Input Voltage	680	720	760	Volts
Driving Power (approx.)	102	86	76	Watts
Grid Dissipation	35	26	21	Watts
Plate Power Input	6670	6970	7250	Watts
Plate Dissipation	1670	1670	1670	Watts
Plate Power Output	5000	5300	5580	Watts

AUDIO FREQUENCY POWER AMPLIFIER AND MODULATOR

Class B (Sinusoidal wave, two tubes unless otherwise specified)

MAXIMUM RATINGS

D-C PLATE VOLTAGE	6000 MAX. VOLTS
MAX.-SIGNAL D-C PLATE CURRENT, PER TUBE	2.5 MAX. AMPS
PLATE DISSIPATION, PER TUBE	5000 MAX. WATTS

TYPICAL OPERATION CLASS AB₂ (Two tubes)

D-C Plate Voltage	4000	5000	6000	Volts
D-C Grid Voltage (approx.)*	-150	-190	-240	Volts
Zero-Signal D-C Plate Current	0.6	0.5	0.4	Amps
Max-Signal D-C Plate Current	4.0	3.2	3.0	Amps
Effective Load, Plate to Plate	2200	3600	4650	Ohms
Peak A-F Grid Input Voltage (per tube)	340	360	390	Volts
Max-Signal Peak Driving Power	340	230	225	Watts
Max-Signal Nominal Driving Power (approx.)	170	115	113	Watts
Max-Signal Plate Power Output	11,000	11,000	13,000	Watts

*Adjust to give stated zero-signal plate current.

TYPICAL OPERATION CLASS AB₂ (Two tubes)

(Modulator service for 4000 and 5000 volt operation, to modulate one or two tubes, as shown under "Plate Modulated Radio Frequency Amplifier.")

D-C Plate Voltage	4000	5000	4000	5000	Volts
D-C Grid Voltage (approx.)*	-155	-200	-145	-190	Volts
Zero-Signal D-C Plate Current	0.4	0.4	0.6	0.5	Amps
Max-Signal D-C Plate Current	1.35	1.13	2.70	2.26	Amps
Effective Load, Plate to Plate	6600	10,000	3300	5000	Ohms
Peak A-F Grid Input Voltage (per tube)	240	275	285	310	Volts
Max-Signal Peak Driving Power	42	40	134	118	Watts
Max-Signal Nominal Driving Power (approx.)	21	20	67	59	Watts
Max-Signal Plate Power Output	3700	4000	7400	8000	Watts
Will Modulate R. F. Final Input of	6670	7250	13,340	14,500	Watts

*Adjust to give stated zero-signal plate current.

APPLICATION

Filament Voltage — The filament voltage, as measured directly at the tube, should be 7.5 volts with maximum allowable variations due to line fluctuation of from 7.1 to 7.9 volts.

Bias Voltage—There is little advantage in using bias voltages in excess of those given under "Typical Operation", except in certain very specialized applications. Where bias is obtained from a grid resistor, suitable protective means must be provided to prevent excessive plate dissipation in the event of loss of excitation.

Plate Voltage—The plate supply voltage for the 3W5000A3 should not exceed 6000 volts. In most cases there is little advantage in using plate-supply voltages higher than those given under "Typical Operation" for the power output desired.

In Class-C FM or Telephony service, a 0.1 henry choke, shunted by a spark gap, should be series connected between the plates of the amplifier tubes and the high voltage plate supply capacitor to offer protection from transients and surges. In plate modulated service, where a plate modulation transformer is used, the protective choke is not normally required.

Grid Dissipation — The power dissipated by the grid of the 3W5000A3 must never exceed 150 watts. Grid dissipation may be calculated from the following expression:

$$P_g = e_{cmp} I_c$$





where P_g = Grid dissipation,
 e_{cmp} = Peak positive grid voltage, and
 I_c = D-C grid current

e_{cmp} may be measured by means of a suitable peak voltmeter connected between filament and grid. Any suitable peak v.t.v.m. circuit may be used (one is shown in "Vacuum Tube Ratings", Eimac News, January 1945. This article is available, in reprint form on request).

In equipment in which the plate loading varies widely, such as oscillators used for radio-frequency heating, care should be taken to make certain that the grid dissipation does not exceed the maximum rating under any condition of loading.

In VHF operation, particularly above 75 Mc., the d-c grid current must not exceed 200 ma. under any conditions of plate loading. With lightly loaded conditions the grid driving-power should be reduced so that the grid current does not exceed one-tenth of the plate current.

DRIVING POWER vs. POWER OUTPUT—The three charts on this page show the relationship of plate efficiency, power output and grid driving-power at plate voltages of 4000, 5000 and 6000 volts. These charts show combined grid and bias losses only. The driving power and power output figures do not include circuit losses. The plate dissipation in watts is indicated by P_p . Points A, B, and C are identical to the typical Class-C operating conditions shown on the first page under 4000, 5000 and 6000 volts respectively.

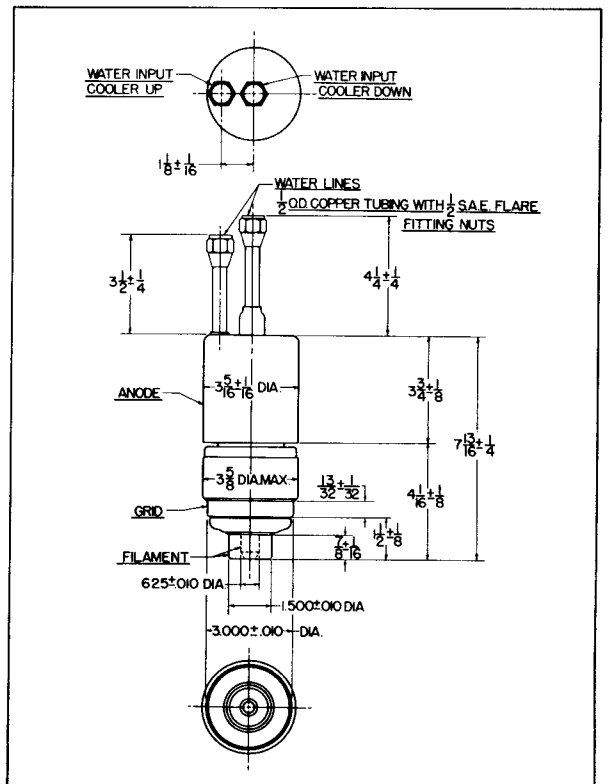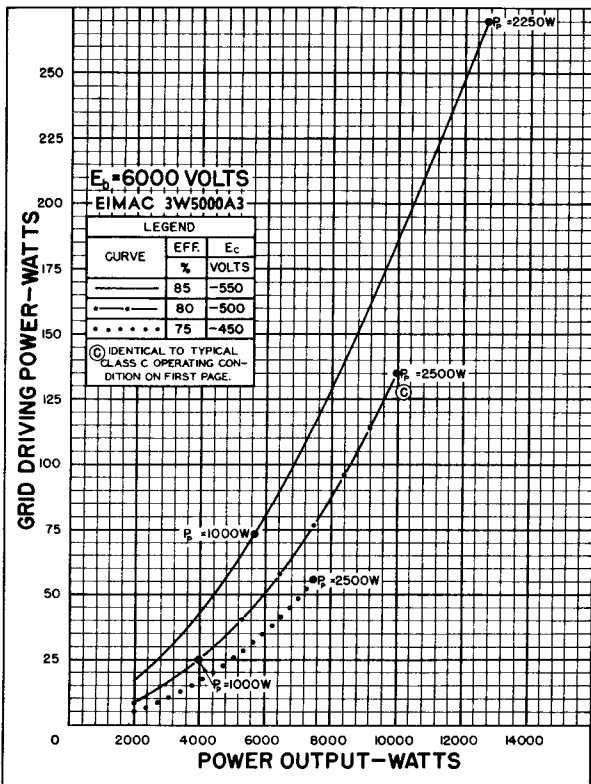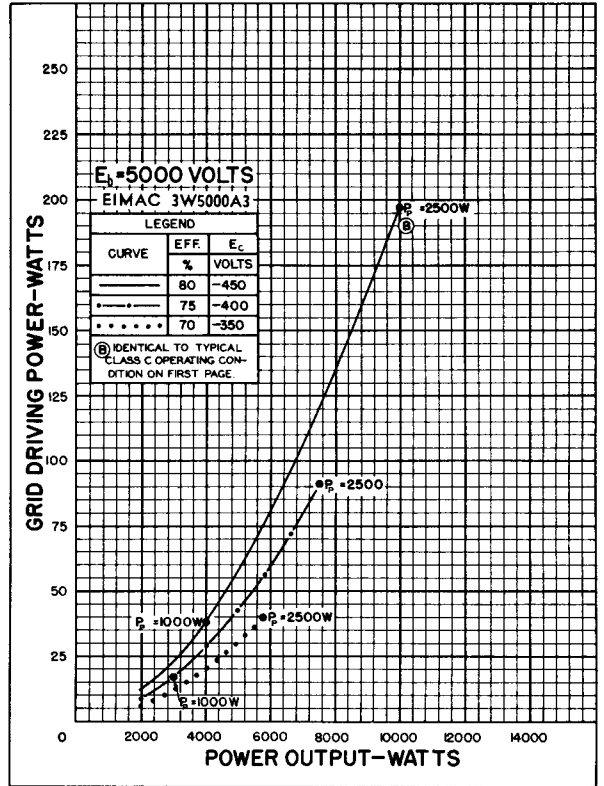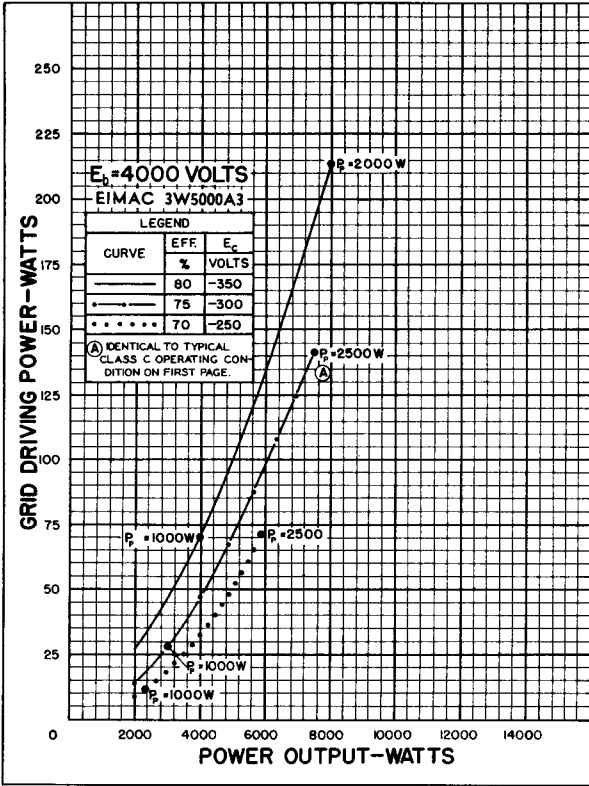

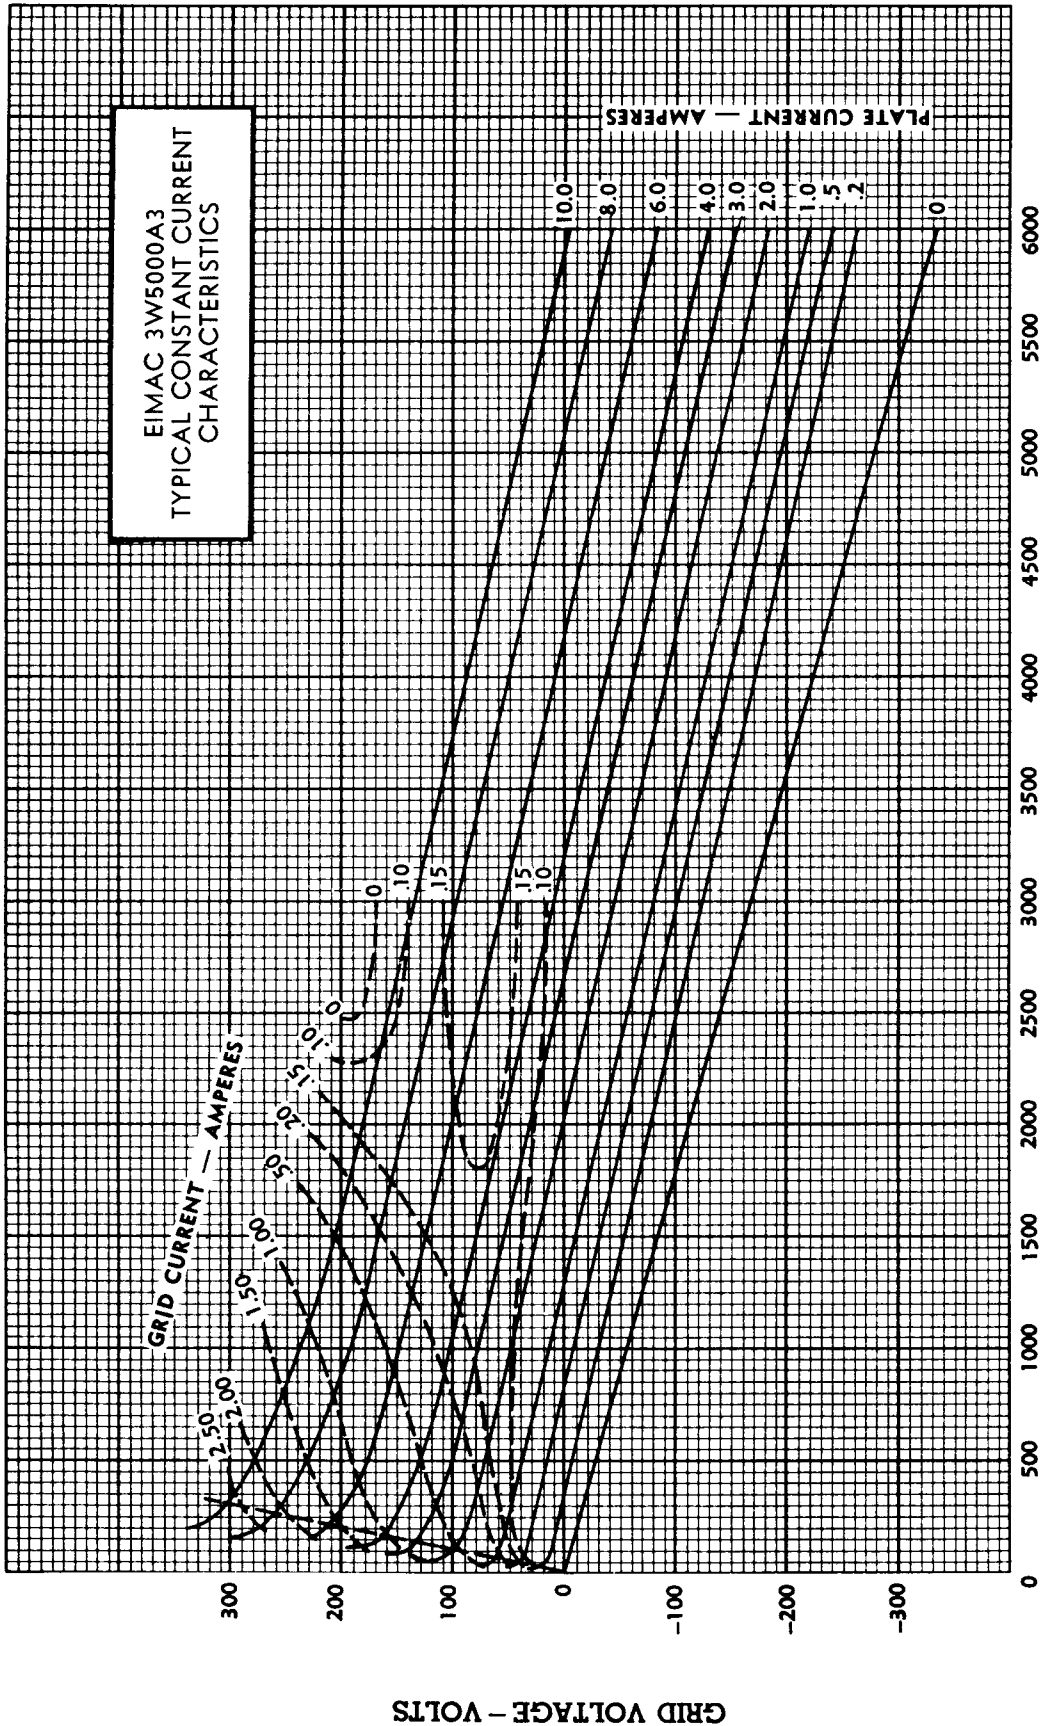


PLATE VOLTAGE — VOLTS