

# EDISWAN

## 21A1

### GAS FILLED TETRODE

Indirectly heated—for use as a Grid Controlled Rectifier

---

21A1

#### GENERAL

The 21A1 is a Gas Filled Tetrode intended for use as a Half Wave Grid Controlled Rectifier at altitudes up to 55,000 feet.

#### RATING

|  |                  |            |
|--|------------------|------------|
| Heater Voltage (volts)   | $V_h$            | 6.3        |
| Heater Current (amps)  | $I_h$            | 0.95       |
| Arc Voltage Drop (volts)   |                  | 9.0        |
| Maximum Peak Forward Anode Voltage (volts)                       | $V_a$ (max)      | 600*       |
| Maximum Peak Inverse Anode Voltage (volts)                       | PIV (max)        | 1,300*‡    |
| Maximum Shield Grid Voltage (Before Anode Conduction) (volts)    | $V_{g2}$ (max)   | -100       |
| Maximum Control Grid Voltage (Before Anode Conduction) (volts)   | $V_{g1}$ (max)   | -100       |
| Maximum Peak Cathode Current (mA)                                | $I_k(pk)$ max    | 1,250      |
| Maximum Mean Cathode Current (mA)                                | $I_k(av)$ max    | 250†       |
| Maximum Mean Positive Control Grid Current (mA)                  | $I_{g1(av)}$ max | 5†§        |
| Control Grid Series Resistance (megohms)                         | $R_{g1}$         | 0.01 to 10 |
| Maximum Peak Heater to Cathode Voltage (Heater Positive) (volts) | $V_{h-k(max)}$   | 25         |
| Maximum Peak Heater to Cathode Voltage (Heater Negative) (volts) | $V_{h-k(max)}$   | 100        |
| Ambient Temperature Range (C°)                                   |                  | -50 to +90 |

NOTES—See overleaf

---

April 1960

Issue 1/7

ASSOCIATED ELECTRICAL INDUSTRIES LTD.

RADIO & ELECTRONIC COMPONENTS DIVISION

**21A1****EDISWAN****21A1****GAS FILLED TETRODE****Indirectly heated—for use as a Grid Controlled Rectifier**

---

**NOTES**

The heater must be switched on for 15 seconds minimum before the application of anode voltage.

\* Maximum ratings are Absolute Values not Design Centres and apply at air pressure corresponding to an altitude of 55,000 feet and up to a maximum supply frequency of 1.6kc/s.

‡ Under transient switching conditions and note (\*) the Maximum Surge Peak Inverse Voltage is 2000V.

|| Maximum Negative Voltage during Conduction is 10V.

† Maximum averaging time, 15 seconds.

§ Currents of this order may not be drawn when the anode is more negative than —10 volts.

**DIMENSIONS**

|                           |       |    |
|---------------------------|-------|----|
| Maximum Overall Length    | (mm)  | 85 |
| Maximum Diameter          | (mm)  | 33 |
| Maximum Seated Height     | (mm)  | 71 |
| Approximate Nett Weight   | (ozs) | 1¼ |
| Approximate Packed Weight | (ozs) | 2  |

**MOUNTING POSITION—Unrestricted**

April 1960

Issue 1/7

**ASSOCIATED ELECTRICAL INDUSTRIES LTD.****RADIO & ELECTRONIC COMPONENTS DIVISION**

21A1

# EDISWAN


## 21A1

### GAS FILLED TETRODE

Indirectly heated—for use as a Grid Controlled Rectifier

---

BASE—International Octal (6 Pin)



Viewed from free end of pins.

### CONNECTIONS

|       |              |    |
|-------|--------------|----|
| Pin 1 | Heater       | h  |
| Pin 2 | No Pin       | NP |
| Pin 3 | Anode        | a  |
| Pin 4 | No Pin       | NP |
| Pin 5 | Control Grid | g1 |
| Pin 6 | Shield Grid  | g2 |
| Pin 7 | Heater       | h  |
| Pin 8 | Cathode      | k  |

21A1


EDISWAN

21A1

GAS FILLED TETRODE

Indirectly heated—for use as a Grid Controlled Rectifier

AVERAGE CHARACTERISTIC CURVES :  $I_{g1}/V_{g1}$

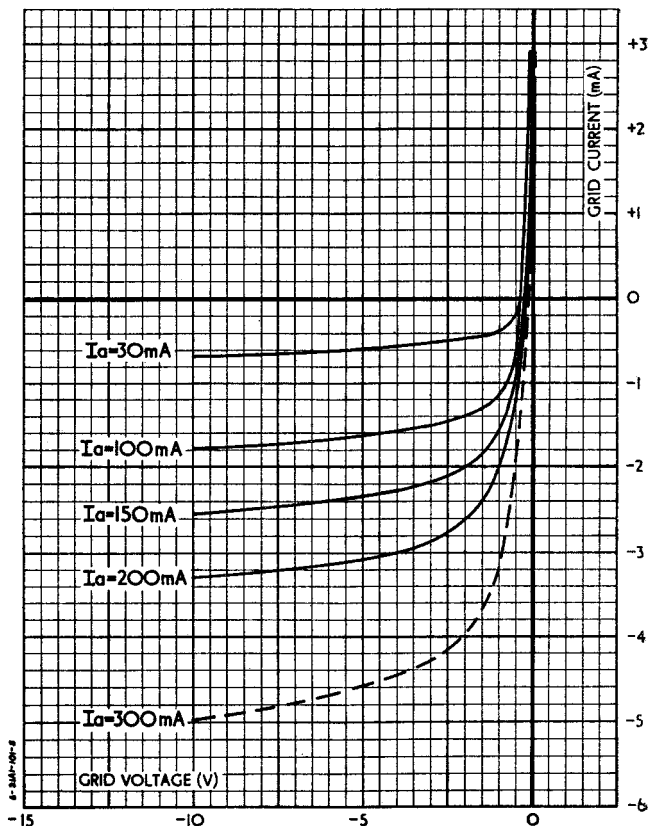

April 1960

Issue 1/7

ASSOCIATED ELECTRICAL INDUSTRIES LTD.

RADIO & ELECTRONIC COMPONENTS DIVISION

# EDISWAN

## 21A1


### GAS FILLED TETRODE

Indirectly heated—for use as a Grid Controlled Rectifier

21A1

AVERAGE CHARACTERISTIC CURVES :  $V_{a(ign)}/V_{g1}$

$R_{g1}=0\Omega$   $R_{g2}=0\Omega$

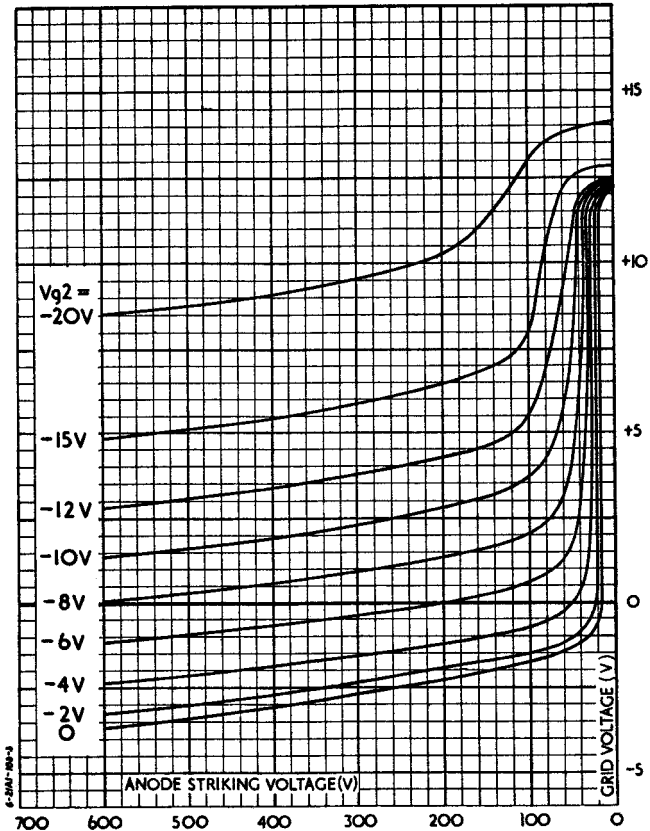

April 1960

Issue 1/7

ASSOCIATED ELECTRICAL INDUSTRIES LTD.

RADIO & ELECTRONIC COMPONENTS DIVISION