




# CBL1

## Mullard DOUBLE DIODE OUTPUT PENTODE

V <sub>fk</sub> max.....	125	V
R <sub>fk</sub> max.....	5,000	ohms
V <sub>d</sub> max.....	200	V
V <sub>d'</sub> max.....	200	V
I <sub>d</sub> max.....	0.8	mA
I <sub>d'</sub> max.....	0.8	mA
V <sub>d</sub> max (I <sub>d</sub> = + 0.3 uA).....	-1.3	V
V <sub>d'</sub> max (I <sub>d'</sub> = + 0.3 uA).....	-1.3	V

Arrangement of electrodes and base connections.

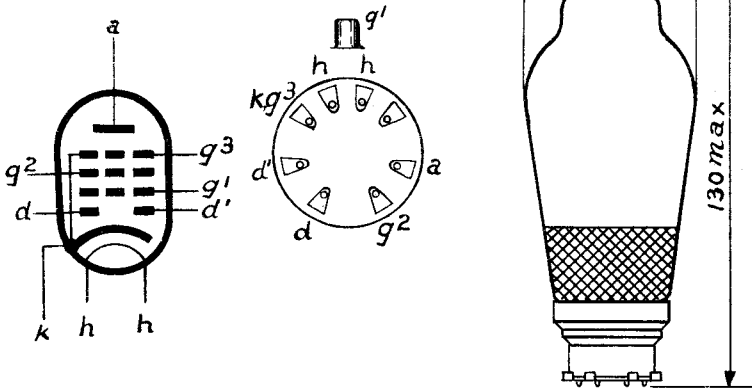


CBL1

# Mullard


## DOUBLE DIODE OUTPUT PENTODE

# CBL1

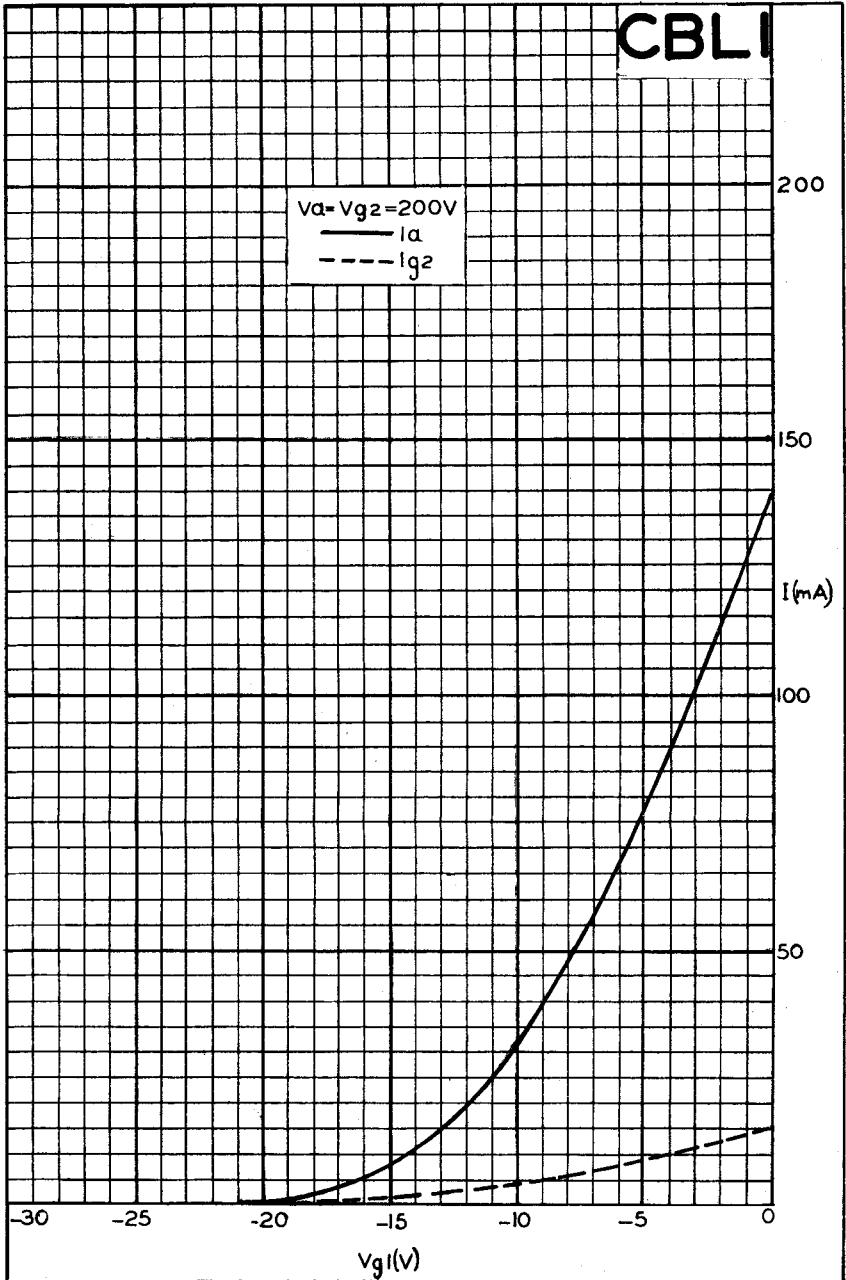

# CBL1

## Mullard DOUBLE DIODE OUTPUT PENTODE

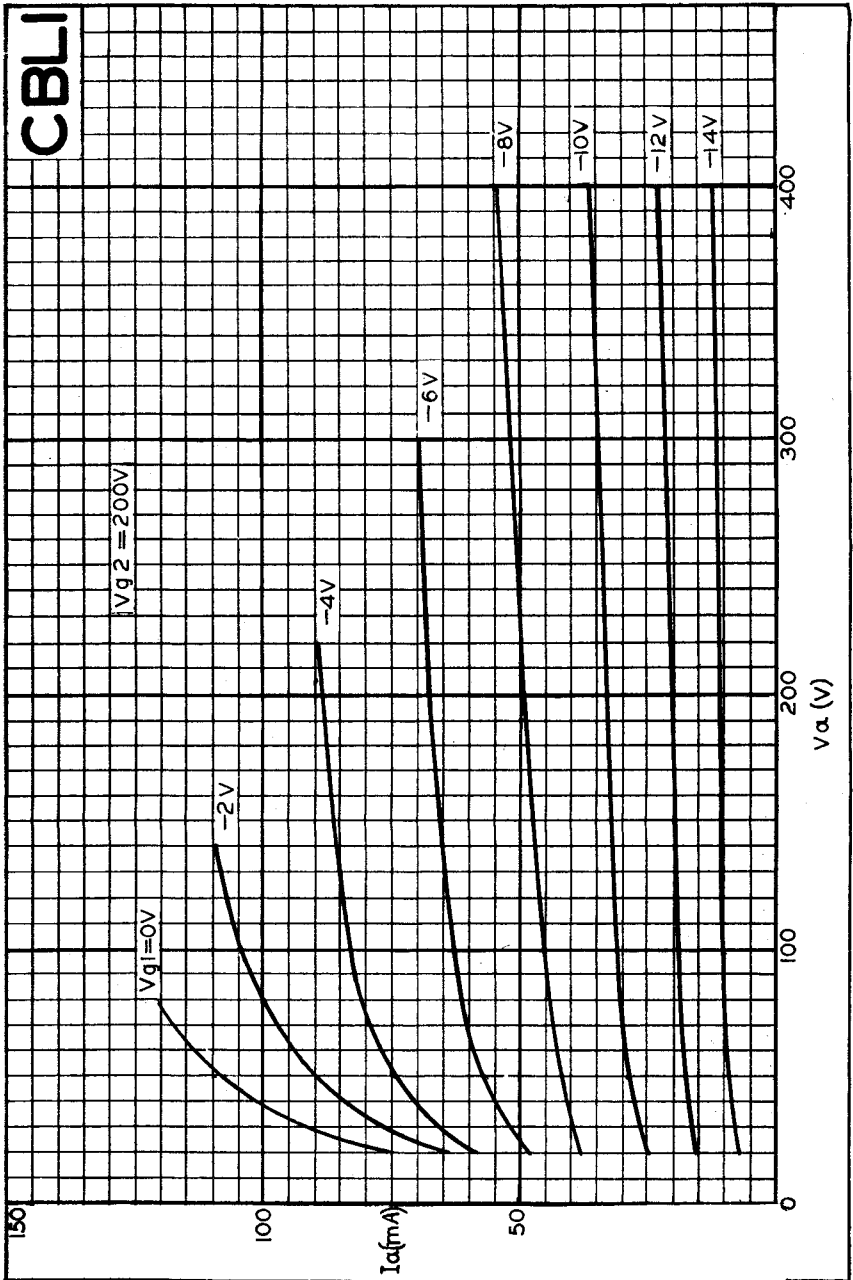

# Mullard

## DOUBLE DIODE OUTPUT PENTODE

# CBL1

# CBL1

