



T.			U_f		I_f	$U_b=U_I$		R_a	U_g	I_a	I_I	α°	$U_{a(max)}$	$U_{I(max)}$	$U_{I(min)}$	U_{flik}
			V	A		V	MΩ									
AM 1	1	eur	4	0,3	200	2	0 ÷ -4	75 ÷ 20	0,13	20 ÷ 90	275	125	250	100		
EM 1	1	eur	6,3	0,2	250	2	0 ÷ -5	95 ÷ 20	0,13	16 ÷ 90						
EM 31	2	Mul	6,3	0,2												
FT 4	2	Fer	4	0,5	250	2	0 ÷ -6		0,5							
ME 4	1	Tu	4	0,3	250	2	0 ÷ -5	1000	1,3	90 ÷ 0						
ME 6	1	Tu	6,3	0,2												
ME 4 S	1	Tu	4	0,3	250	2	0 ÷ -5	120	2	90 ÷ 0	250	200	250	100		
ME 6 S	1	Tu	6,3	0,2												
2 E 5	3	amer	2,5	0,8	125	1	0 ÷ -4,5	100	0,8	90 ÷ 0						
6 E 5	3	amer	6,3	0,3	250	1	0 ÷ -7,5	200	2	90 ÷ 0	250	125	250	90		
6 E 5-GT	2	int	6,3	0,3	100	0,5	0 ÷ -3,3	190	1	90 ÷ 0						
6 E 5 C	4	CCCP	6,3	0,3	200	1	0 ÷ -6,5	190	3	90 ÷ 0						
6 S 5	5	amer	6,3	0,3	250	1	0 ÷ -8	240	4	90 ÷ 0	250	100	250	90		
1629	2	int	12,6	0,15												

Equivalents


AD 77	Dar = AM 1	HF 3110	RFT = 6 E 5	TV 4	6 EG 5	eur = 6 E 5
AW 6	eur = EM 31	OSW 3110	RFT = 6 E 5	TV 6	6 S 5-G	Vis = 6 S 5
A 4-CAT	Cas = AM 1	TH 1	Dar = AM 1	U6-CAT	6 X 6	amer = 6 E 5-GT
ED 78	Dar = EM 1	TK 406	Tri = AM 1	VEM 1	6 X 6-G	amer = 6 E 5-GT
E 1180	Marc = EM 31	TK 606	Tri = EM 1	V 4678	41 ME	Cos = AM 1
					4678	Phil = EM 1

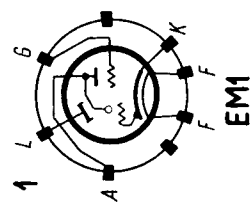


EM1

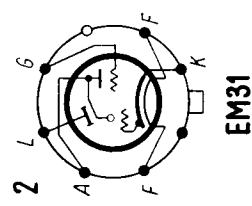


EM31

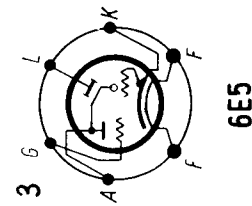

6E5

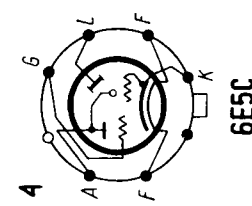

6E5C

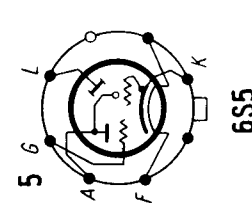

6S5



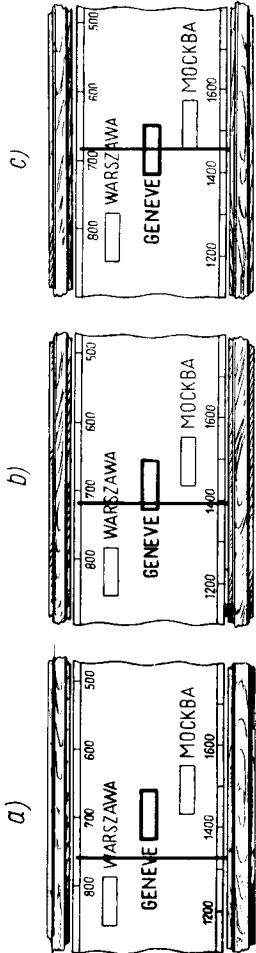


Fig. 1

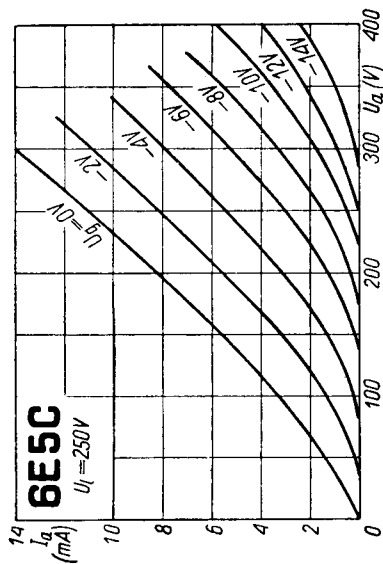

6E5C
 $U_g = 250V$


Fig. 2

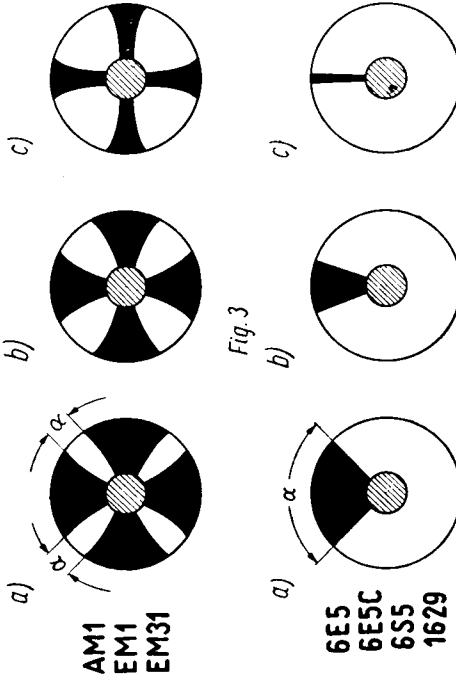

AM1
EM1
EM31

6E5
6E5C
6S5
1629


Fig. 3

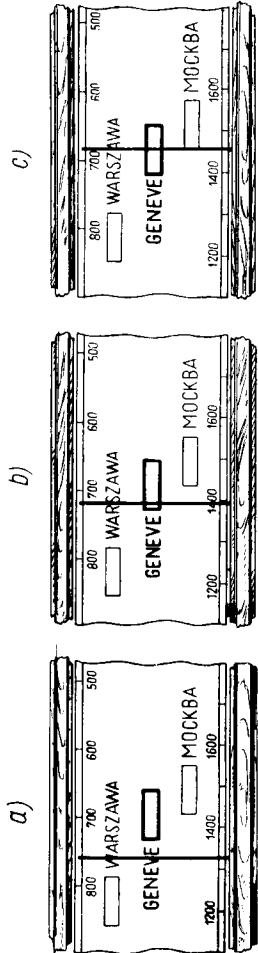


c)

b)


a)

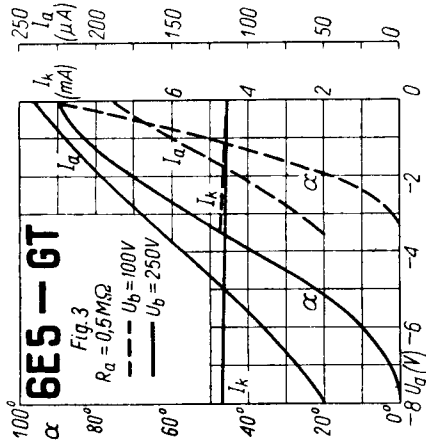

6E5-GT
Fig. 5
 $R_a = 0,5 M\Omega$
 $U_b = 100V$
 $U_b = 250V$

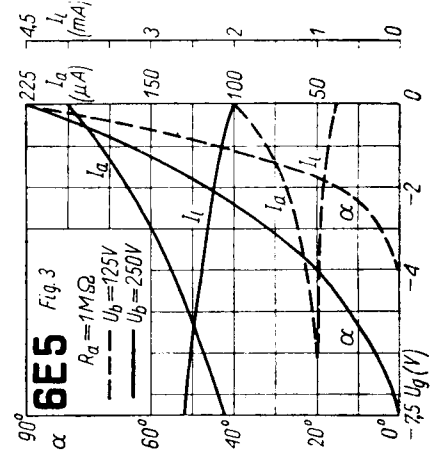

6E5
Fig. 6
 $R_a = 1 M\Omega$
 $U_b = 125V$
 $U_b = 250V$

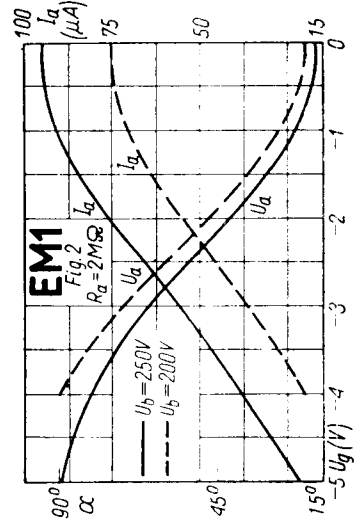

EM1
Fig. 7
 $R_a = 2 M\Omega$
 $U_b = 250V$
 $U_b = 200V$

