

4WP11 - 4WP16

Ultra-High Resolution  
Cathode Ray Tube

PHILCO CORPORATION - LANSDALE DIVISION

CATHODE RAY TUBE

DATA SHEET

Tentative

Description

The Philco type 4WP- is an ultra-high resolution cathode ray tube of the magnetic focus and magnetic deflection type. It features an ultra-high resolution spot which is essentially constant over a radius of 0.75 inch. The tube is capable of resolving 3500 lines per inch.

The optical quality, non-browning, flat faceplate, combined with an essentially blemish-free, metal backed screen, makes it suitable for photo-oscillographic applications. The high quality settled screen results in considerably more light output than other types of high resolution screens.

Electrical Data

Focusing Method . . . . .	Magnetic
Deflection Method . . . . .	Magnetic
Deflection Angle, approximate . . . . .	46.5°
Heater Voltage . . . . .	6.3 Volts
Heater Current . . . . .	0.60 ±10% Ampere
Direct Interelectrode Capacitance (Maximum)	
Cathode to All Other Electrodes . . . . .	6.0uuf
Grid #1 to All Other Electrodes . . . . .	6.0uuf

Optical Data

Phosphor Number	P11	P16
Fluorescent Color . . . . .	Blue . . . . .	Bluish Purple
Phosphorescence . . . . .	Blue . . . . .	Bluish Purple
Persistence . . . . .	Medium Short . . . . .	.Very Short
Faceplate		
Optical Quality, Flat, Gray, Non-browning		

Mechanical Data

Overall Dimensions

Length . . . . .	12 <sup>±</sup> 1/4 Inches
Greatest Bulb Diameter . . . . .	3 3/4 <sup>±</sup> 3/32 Inches
Minimum Useful Screen Diameter . . . . .	2.8 Inches
Base . . . . .	B5-57
Anode Contact . . . . .	J1-21

Maximum Ratings

Anode Voltage (Note #1) . . . . .	22,000 Volts DC
Grid No. 1	
Negative Bias Value . . . . .	100 Volts DC
Positive Bias Value . . . . .	0 Volts
Positive Peak Value . . . . .	0 Volts
Heater-Cathode Voltage (Note #2) . . . . .	±180 Volts DC
Grid No. 1 Circuit Resistance. . . . .	1.0 megohm

Typical Operating Conditions

Anode Voltage . . . . .	20,000 Volts
Grid #1 Voltage (Note #3) . . . . .	-20 to -50 Volts
Line Width "A" (Note #4) . . . . .	0.0003 Inch
Spot Size (Note #5) . . . . .	0.0007 Inch


Notes

1. Anode and Grid #2 are connected together within the tube and are referred to herein as anode.
2. Cathode should be returned to one side or to the mid-tap of the heater transformer winding.
3. For visual extinction of the undeflected focused spot.
4. Measured with a 525 line pattern adjusted to 90% of minimum useful screen diameter at  $I_k = 1.0\mu a$ . The line width is the merged raster height divided by the number of lines (500) (measured in the center of tube face).
5. Measured to the half-brightness point at center of face with  $I_k = 1.0\mu a$ .

PHILCO CORPORATION - LANSDALE DIVISION

Outline Drawing  
4WP11 - 4WP16

Ultra-High Resolution  
Cathode Ray Tube

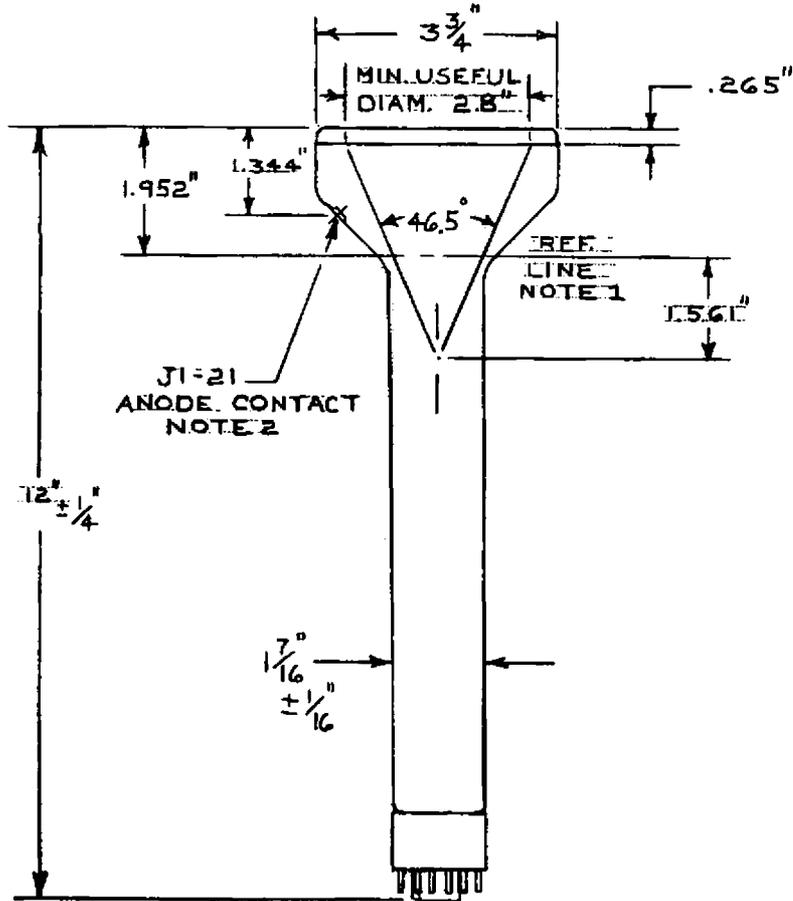

Base lug aligns with anode button

MECHANICAL NOTES

1. Reference line is determined by a 1.937" ± .002" diameter ring gauge 2 inches long.
2. Anode button is aligned with base lug ± 10°.

WARNING

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at anode voltages higher than 18,000 volts.

The information, diagrams, or any other data included herein are believed to be accurate and reliable. However, the Philco Corporation, Lansdale Division, assumes no responsibility or liability whatsoever for the application, interpretation or use made of such information, diagrams or data especially insofar as the use of said information, diagrams or data affects any patent, trademark or proprietary data rights.