

Specification MAP/CV215/Issue 6 Dated 19.1.49. To be read in conjunction with K.1001.	<u>SECURITY</u>	
	<u>Specification</u> <del>RESTRICTED</del> <i>Unclassified</i>	<u>Valve</u> UNCLASSIFIED

→ Indicates a change

<u>TYPE OF VALVE:</u> Hydrogen diode			<u>MARKING</u>	
<u>CATHODE:</u> Directly heated			See K.1001/4	
<u>ENVELOPE:</u> Glass			<u>PACKING</u>	
<u>PROTOTYPE:</u> E1497			See K.1005	
<u>RATING</u>			<u>BASE</u>	
			None	
			<u>DIMENSIONS AND CONNECTIONS</u>	
			See drawing on Page 3.	


NOTES

- A: For a maximum period of 50 milliseconds.
- B: For a pulse length not less than 1μsec. and peak current not greater than 18 amps.
- C: Pulse length 1μsec. and repetition rate 1200 per sec. Higher ratings must be established by life test.

TESTS

To be performed in addition to those applicable in K1001.

	Test Conditions	Test	Limits		No. Tested
			Min.	Max.	
a	Vf = 2.0	If (A)	7.4	9.0	100%
b	Applied pulse voltage to give peak current of 20 amps., pulse length 15 $\mu$ secs., and pulse shape sinusoidal.	Voltage drop across valve (V)	-	120	100%
c	Applied pulse voltage to give 50 mA. mean current, 18 amps. peak current and peak inverse voltage of 3.5 kV. with pulse length of 1 $\mu$ sec., repetition rate of 1200 per sec., and minimum rate of rise of current 80 amps. $\mu$ sec.	The valve shall operate satisfactorily and the wavefront shall be steady and smooth and the reverse current less than 1 amp. peak.			100%

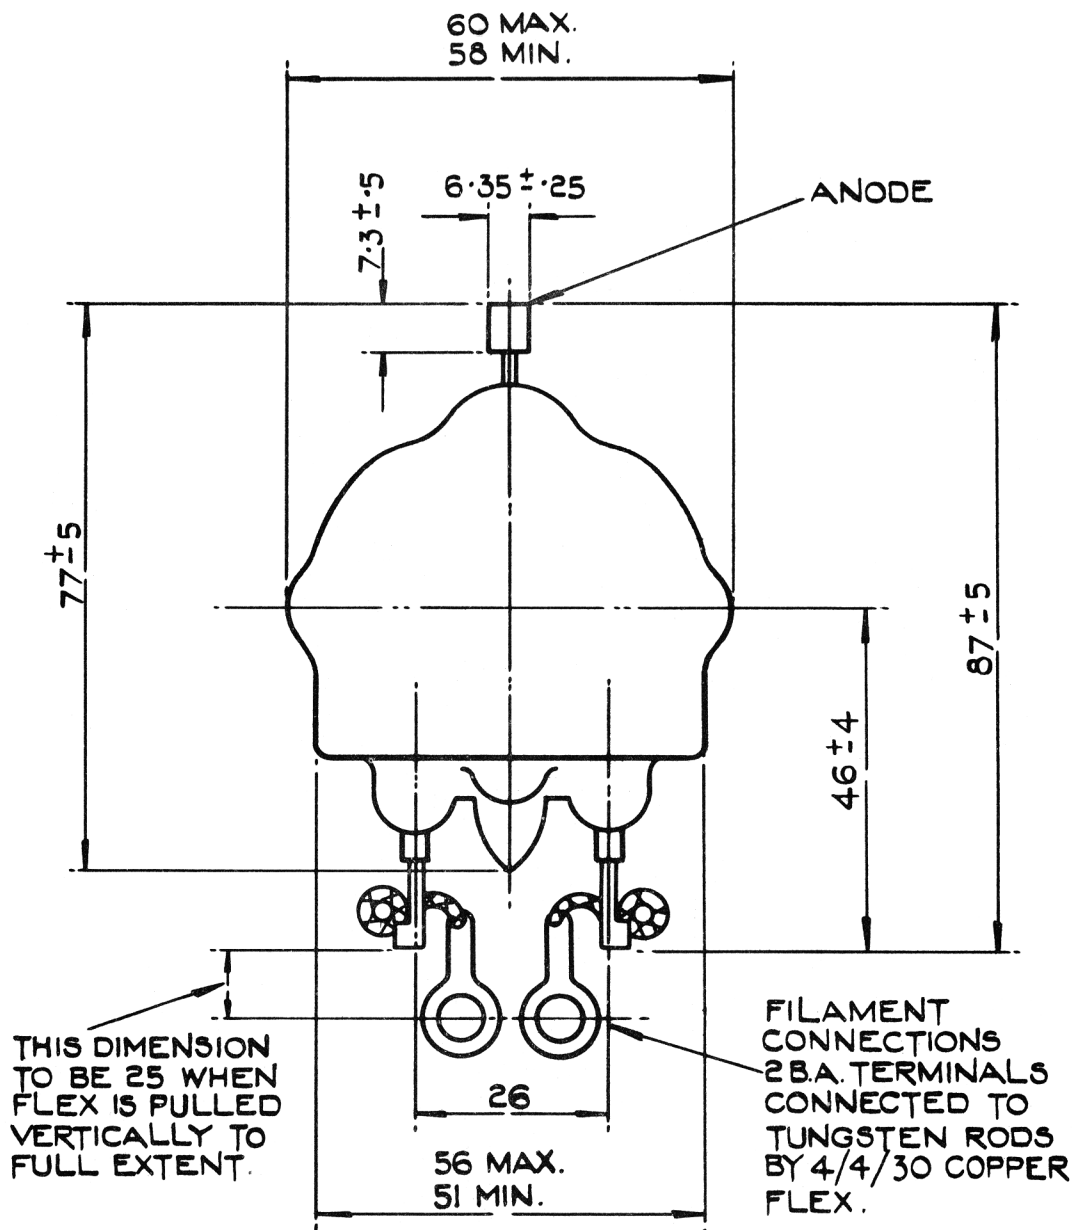

ALL DIMENSIONS IN MILLIMETRES.