

ADMIRALTY SIGNAL ESTABLISHMENT

Specification AD/CV218/Issue 3. Dated 1.2.66. To be read in conjunction with K1001, ignoring clauses:- 5.2; 5.8.	<u>SECURITY</u>	
	<u>Specification</u> Confidential	<u>Valve</u> Restricted

<u>TYPE OF VALVE:-</u> Velocity modulated beam type local oscillator.			<u>MARKING</u>		
<u>CATHODE:-</u> Indirectly heated.			See K1001/4		
<u>ENVELOPE:-</u> Copper glass with resonator			Additional Marking:-		
<u>PROTOTYPE:-</u> KRN3.			Serial No.		
<u>RATING</u>			Note	<u>BASE</u>	
				IO - See K1001/AIV/D1.	
Vn	(V)	4.0		<u>Pin</u>	<u>Electrode</u>
Ih	(A)	1.3		1	Grid
Approx. tuning range	(cms)	3.07 to 3.13		2	Heater
Max. resonator wattage	(W)	10		3	No connection
Resonator voltage	(kV)	1.35	C	4	No connection
Reflector voltage range	(V)	-210 to -300	C	5	No connection
Grid voltage range	(V)	0 to -100		6	No connection
Approx. negative Vg for oscillation cut off	(V)	150		7	Heater
Total AFC range	(Mc/s)	20	A	8	Cathode
Total reflector voltage change for above frequency change	(V)	20 to 40	B	TC	Reflector
Max. series grid resistance	(Ω)	25,000		<u>TOP CAP</u>	
Max. series reflector resistance	(Ω)	25,000		See K1001/AI/D5.2.	
Max. temp. of resonator.		140°C		<u>DIMENSIONS</u>	
See drawing, page 3.					
<u>NOTES</u>					
A. By variation of reflector voltage. From $\frac{1}{2}$ power to $\frac{1}{2}$ power at any mean frequency in the range.					
B. Superimposed on initial setting.					
C. Va = Resonator voltage. Vr = Reflector voltage.					
<u>Finish.</u> The circuit portions of the valve are required to be silver plated. All other parts excluding the valve pins and top-cap, are to be given an approved corrosion resisting coating.					

TESTS

To be performed in addition to those applicable in K100:

	Test Conditions				Test	Limits		No. Tested	Note
	Vh (V)	Vg (V)	Vr (V)	Va (V)		Min.	Max.		
a	0	G-C potential 250 V minimum			G-C insulation (M Ω)	0.1	-	100%	
b	4.0	See K1001/5.3			H-C leakage (μ A)	-	50	100%	
c	4.0				Ih (A)	1.0	1.6	100%	
d	4.0	Ad- justed	Ad- justed	1350	(i) Power output (mW)	15	-	100%	1
		Vg adjusted (not +ve) to give Ia = 7.4 mA, or max. available Ia if less than 7.4 mA. Valve tuned to 9750 Mc/s. Unloaded power measurement.			(ii) Vr (V)	-210	-300		
					(iii) Vg (V)	0	-100		
e	4.0	As in 'd'	Initi- ally as in 'd'	1350	(i) Frequency change (Mc/s)	20	-	100%	1
					(ii) Vr change (V)	20	40		


Valve tuned initially to 9750 Mc/s. Power output fed through an approved form of waveguide transformer to a section of 1" x $\frac{1}{2}$ " O.D. waveguide terminated by a load for which the SWR is better than 0.9. Vr varied first from a value less than to value more than that observed in test 'd', and then similarly in the reverse direction; to ensure that any hysteresis effect will be revealed, the variation must be of sufficient amplitude to stop oscillation on both sides of the mean Vr. The magnitude of the frequency change which is free from any hysteresis effect, and which corresponds to output power of not less than half of the value found in test 'd' is to be observed. The change in Vr corresponding to a change in frequency of 20 Mc/s is to be observed.

f	4.0	As in 'd'	Ad- justed	1350	(i) Power output (mW)	15	-	100%	1
					(ii) Vr (V)	-210	-300		
g	4.0	As in 'd'	Initi- ally as in 'f'	1350	(iii) Vg (V)	0	-100		
					(i) Frequency change (Mc/s)	20	-	100%	1
					(ii) Vr change (V)	20	40		
					Valve tuned initially to 9588 Mc/s. Test analogous to 'e' performed with reference to reflector voltage and power observed in 'f'.				

NOTE.

- Tests to be made with grid and reflector supplies whose respective total series resistance is 50,000 ohms. The Vg and Vr specified may be taken as including the voltage drop across these resistances, as this should be negligible with a good valve. Should the grid lose control of the anode current as a result of grid current flowing, the valve shall be rejected.

ELEVATION

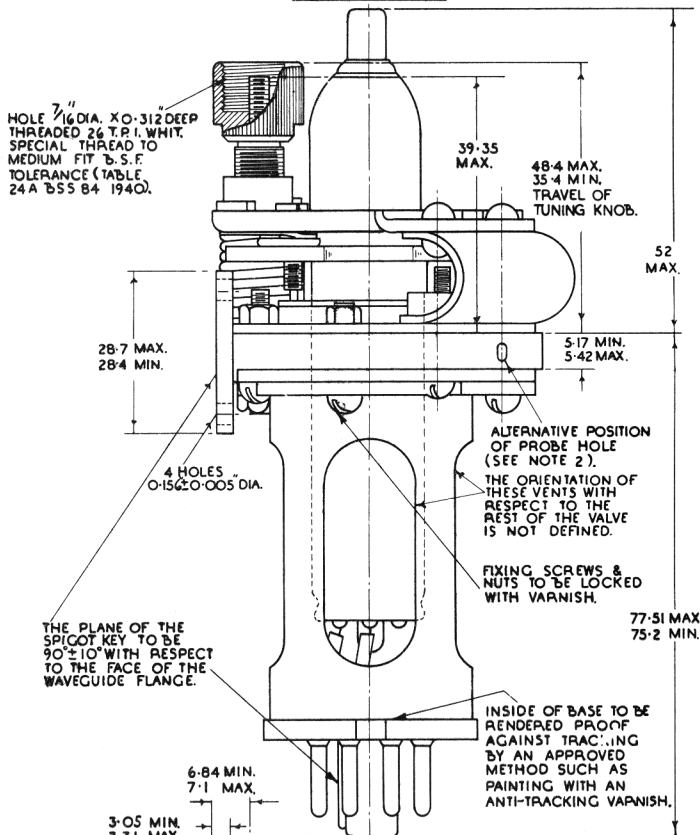

NOTES TO USER.

1. OWING TO A CHANGE IN DESIGN
TWO SIZES OF FLANGE PLATE
REQUIRING DIFFERENT FIXING
CENTRES ARE BEING MADE
& DESIGNERS MUST ALLOW
FOR BOTH TYPES IN EQUIP-
MENTS (SEE BELOW).
2. THE NORMAL POSITION OF THE
0.156" PROBE HOLE WILL BE AS
INDICATED, DIAMETRICALLY
OPPOSITE WAVE GUIDE OUTPUT
BUT SOME VALVES ARE MADE
WITH THIS HOLE TOWARDS ONE
SIDE I.E. BENEATH THE 'C' SPRING.

REAR VIEW OF
FLANGE PLATE

THE DOTTED LINES
REPRESENT ALTERNATIVE
TYPE (SEE NOTE ABOVE).

