

|   |                                      |                              |
|---|--------------------------------------|------------------------------|
| Specification MOA/CV389<br>Issue 2B 12th November, 1964<br>To be read in conjunction with K1001 and BS448 | <u>SECURITY</u>                      |                              |
|   | <u>Specification</u><br>UNCLASSIFIED | <u>Valve</u><br>UNCLASSIFIED |

→ indicates a change

|   |      |                                      |  |  |        |
|---|------|--------------------------------------|--|--|--------|
| TYPE OF VALVE - Cathode Ray Tube (P.D.A.)<br>DEFLECTION - Electrostatic, Symmetrical<br>FOCUS - Electrostatic<br>BULB - Glass with internal conductive coating<br>SCREEN - GG4<br>PROTOTYPE - VCRX 210  |      |                                      | <u>MARKING</u><br><br>See K1001/4                                |  |        |
|   |      |                                      | <u>BASE</u><br>See BS448: B9G with moulded sole plate and spigot |  |        |
| <u>RATINGS</u><br><br>All limiting values are absolute<br><br>Heater Voltage (V) 4.0<br>Heater Current (A) 1.0<br>Max. Anode 4 Voltage (KV) 4.0<br>Max. Anode 3 Voltage (KV) 1.7<br>Max. Anode 2 Voltage (V) 200<br>Max. Peak Cathode Current (μA) 500<br><br><u>Typical Operating Conditions</u><br><br>Anode 4 Voltage (KV) 3.5<br>Anode 3 Voltage (KV) 1.5<br>Anode 2 Voltage (Approx) (V) 75<br>Beam Current (μA) 30<br>Cathode Current (μA) 40<br>X Plate Sensitivity (mm/V) 0.110<br>Y Plate Sensitivity (mm/V) 0.087 | Note | <u>CONNECTIONS</u><br>Pin. Electrode |  |  |        |
|   |      | 1                                    | Heater and Cathode h+k   |  |        |
|   |      | 2                                    | Grid   |  | g      |
|   |      | 3                                    | Heater   |  | h      |
|   |      | 4                                    | Anode 2  |  | a2     |
|   |      | 5                                    | X Plate 1  |  | X1     |
|   |      | 6                                    | Y Plate 1  |  | y1     |
|   |      | 7                                    | Anode 1 and Anode 3  |  | a1 +a3 |
|   |      | 8                                    | Y Plate 2  |  | y2     |
|   |      | 9                                    | X Plate 2  |  | X2     |
|   |      | Side                                 | Anode 4  |  | a4     |
|   |      | Cont-act                             |  |  |        |
|   |      |                                      | <u>DIMENSIONS</u><br><br>See drawing on page 4                   |  |        |
|   |      |                                      | <u>SIDE CONTACT</u><br><br>CT 7                                  |  |        |
| <u>NOTES</u><br>A. The tube shall be of the post deflection accelerator type and of a design such that a change of $\pm 10\%$ in the Anode 2 voltage shall produce no appreciable change in the cut off voltage.<br><br>B. When viewing the screen with the tube positioned such that the keyway of the spigot is at an angle of $30^\circ$ to the left of the vertical, a position voltage on pin 5 will deflect the spot to the right, and a positive voltage on pin 8 will deflect the spot upwards.                     |      |                                      |  |  |        |

Test conditions unless otherwise stated:-

Vh(V)

4

Va4(KV)

3.5

Va3(KV)

1.5

Va2 and Vg


Any convenient value

| K1001<br>5A       | TEST  | TEST CONDITIONS  | AQL<br>% | Insp.<br>Level | Sym-<br>bol | LIMITS |               | Units   |
|-------------------|---|--|----------|----------------|-------------|--------|---------------|---------|
|                   |   |  |          |                |             | Min    | Max.          |         |
| 3.1               | General Inspection<br>Dimensions  | No Voltages<br>No voltages see<br>drawing on page 4  |          | 100%           |             |        |               |         |
| 3.2.1             | Loose Particles   | No Voltages  |          | 100%           |             |        |               |         |
| 4.1.1             | Insulation  | No Voltages  |          | 100%           |             |        |               |         |
| 4.1.2             | Grid Insulation<br>Leakage Current<br><u>Alternative Method</u><br>Increase in voltmeter<br>reading<br>Heater Current | Vg = -120V; Rg = 0<br><br>Rg = 10M ohm   |          | 100%           | Ig          | -      | 12            | $\mu$ A |
|                   |   |  | 1.5%     | II             | Ih          | 0.85   | 1.2           | A       |
| 4.3               | Negative Grid Cut-off<br>Voltage (V1)   | Optimum focus:<br>No deflection  |          | 100%           | Vg          | 40     | 120<br>record | V       |
|                   | Negative Grid<br>Voltage (V2)   | Light Intensity =<br>0.1 Candela on<br>close raster. Optimum<br>Focus  |          | 100%           | Vg          | record |               | V       |
|                   | Grid Base (V1-V2)   |  |          | 100%           |             | 10     | 35            | V       |
| 5.7<br>&<br>5.7.1 | Focus, line width<br>at centre of trace,<br>and Anode 2 voltage   | Optimum Focus<br>The line width shall<br>be measured at the<br>centre of the trace.<br>Grid drive from cut-<br>off by 100 $\mu$ S pulse of<br>amplitude (V1-V2).<br>p.r.f. = 100 p.p.s.<br>max |          | 100%           |             | -      | 0.5           | mm      |
|                   |   |  |          | 100%           | Va2         | 40     | 110           | V       |
| 6.1               | Deflection<br>Sensitivity<br>(1) X Plate<br>(2) Y Plate   |  |          | 100%           |             | 0.095  | 0.125         | mm/v    |
|                   |   |  |          | 100%           |             | 0.075  | 0.1           | mm/v    |

| K1001<br>5A | TEST  | TEST CONDITION | AQL<br>% | Insp.<br>Level | Sym-<br>bol                        | LIMITS           |                     | UNITS                |
|-------------|---|----------------|----------|----------------|------------------------------------|------------------|---------------------|----------------------|
|             |   |                |          |                |                                    | Min.             | Max                 |                      |
| → 6.4.1     | Spot Position<br>and Displacement   |                |          | 100%           |                                    | -                | 3                   | mm                   |
| → 6.3       | Useful Screen Area<br>Diameter on Geo-<br>metric Centre.  |                |          | 100%           |                                    | 35               | -                   | mm                   |
|             | Angle between X and<br>Y axis of deflection   |                |          | 100%           |                                    | 88               | 92                  | deg-<br>rees         |
|             | Orientation of Y<br>axis of deflection<br>relative to axis<br>through key way on<br>base spigot                 |                |          | 100%           |                                    | 20               | 40                  | deg-<br>rees         |
|             | Orientation of<br>diameter line<br>through side contact<br>relative to axis<br>through keyway on<br>base spigot |                |          | 100%           |                                    | -                | ± 10                | deg-<br>rees         |
| → 4.6       | Capacitances<br>Each X plate -all<br>Each Y plate -all<br>to each Y plate<br>Grid to all                        |                | 6.5      | IC             | cx-all<br>cy-all<br>Cx-y<br>cg-all | -<br>-<br>-<br>- | 12<br>12<br>3<br>20 | pF<br>pF<br>pF<br>pF |
| → 7.2       | Resistance to<br>external pressure  |                |          | Q.A.           |                                    |                  |                     |                      |

SIDE CONTACT CT7

ANY OVALITY SHALL  
NOT CAUSE THE  
DIFFERENCE BETWEEN  
MAJOR AND MINOR  
DIAMETERS TO EXCEED  
1 MM.

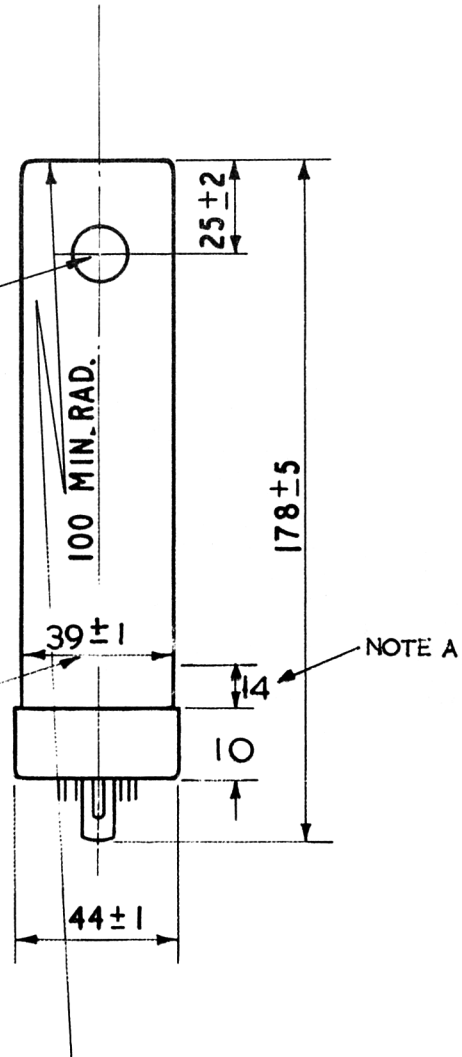

NOTES

A. OVER THIS LENGTH THE DIAMETER SHALL BE  $40 \pm 2$

ALL DIMENSIONS ARE IN MILLIMETRES