

<u>Specification</u> MAP/CV433/Issue 2 Dated 21.11.49 To be read in conjunction with K1001.	<table><tr><th colspan="2"><u>SECURITY</u></th></tr><tr><td><u>Specification</u> RESTRICTED <i>Unclassified</i></td><td><u>Valve</u> UNCLASSIFIED</td></tr></table>	<u>SECURITY</u>		<u>Specification</u> RESTRICTED <i>Unclassified</i>	<u>Valve</u> UNCLASSIFIED
<u>SECURITY</u>					
<u>Specification</u> RESTRICTED <i>Unclassified</i>	<u>Valve</u> UNCLASSIFIED				

→ Indicates a change


<u>TYPE OF VALVE</u>	- Ballast Lamp	<u>MARKING</u> See K. 1001/4
<u>ENVELOPE</u>	- Glass	<u>PACKING</u> See K. 1005
<u>PROTOTYPE</u>	- BIC/1E	<u>BASE</u> See Drawing, Page 3.
<u>RATING</u> The tube gives a stabilised current of 0.98 Amps. nominal, over the voltage range of 3 to 9.5 volts.		<u>DIMENSIONS</u> See Drawing, Page 3.

CV433

TESTS

To be performed in addition to those applicable in K1001.

Test Conditions	Test	Limits		No. Tested	Note
		Min.	Max.		
a	Applied D.C. Voltage varied from 3 to 9.5V.	0.88	1.07	100%	

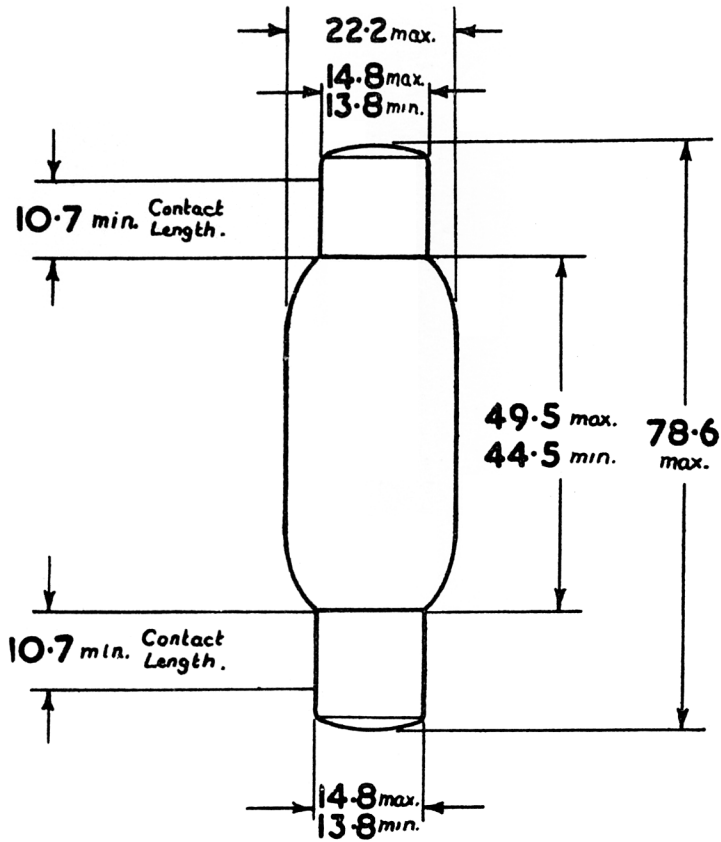

ALL DIMENSIONS ARE IN MILLIMETRES