

Specification AD/CV987/Issue 2 Dated 8.7.46. To be read in conjunction with K1003.	<div style="text-align: center;"><u>SECURITY</u></div> <div style="display: flex; justify-content: space-between;"> <div style="text-align: center;"> <u>Specn.</u> Restricted </div> <div style="text-align: center;"> <u>Valve</u> Unclassified </div> </div>
--	---

→ Indicates a change.

<u>TYPE OF VALVE:-</u> Cathode Ray Tube.		<u>MARKING</u>	
<u>TYPE OF DEFLECTION & FOCUS:-</u> Electrostatic.		See K1003/7.	
<u>BULB:-</u> Coated partially internally with graphite.		<u>BASE</u>	
<u>SCREEN:-</u> GgN53, green, medium persistence, special markings as specified. See Note A.		GK12. See K1001/AIV/D.16	
<u>PROTOTYPE:-</u> V1040.		Contact	Electrode
		1	Modulator
		2	Cathode
		3	Heater
		4	Heater
		5	Anode 1
		6	Anode 2
		7	Blank
		8	Y-south
		9	Y-north
		10	Anode 3
		11	X-east
		12	X-west
<u>RATING</u>		<u>DIMENSIONS</u>	
		See Drawing Page 3.	


NOTE

- A. The screen calibration markings shall be made by sticking on an approved transparent material (e.g. celluloid) printed with the markings shown on page 4. The calibration must be sufficiently accurate to pass the relevant tests given. At Type Approval the scale will be subjected to mechanical and tropical tests.


TESTS

To be performed in addition to those applicable in K1003.


	Test Conditions					Test	Limits		No. Tested
	Vh (V)	V mod (V)	Va1 (V)	Va2 (V)	Va3 (kV)		Min.	Max.	
a	4.0	-	-	-	-	Ih (A)	0.6 0.6	0.79	100%
b	4.0		450	read	2.2	Va2 (V)	380	500	100%
	V mod. adjusted for working brightness, Va2 for optimum focus.								
c	4.0	read	450	as in 'b'	2.2	V mod. for cut-off (V)	30	90	100%
	V mod. adjusted for Ib cut-off.								
d	Conditions as in 'b'. Suitable deflection voltages applied to give 3-in. line deflection.					Sensitivity: (i) Of less sensitive pair of plates. (mm/V) (ii) Of more sensitive pair of plates.	475 Va3	565 Va3	100%
							To be within 6% of value for 'd'(i)		
e	Conditions as in 'b'. Deflection voltages applied to X and Y plates successively, the pair of plates not in use being earthed.					Angle between X-axis (E-W) and Y-axis (N-S)	89°	91°	100%
f	Conditions as in 'b'. Tube screened from external field.					Distance of spot at rest from mechanical centre of screen (mm)	-	8	100%
g	Conditions as in 'b'. X and Y deflecting voltages, calculated to give bearings at every 22.5° applied. Bearing checked if trace is non-linear by laying cursor along straight part of the scan.					Calibration. (Angular divergence of scan line from calibration for every 22.5° of scale).	-	1°	100%
h	Conditions as in 'b'. X and Y deflections applied independently and successively.					Calibration. (Angular divergence of scan line from N.S.E.W. markings).	-	0.25°	100%
j	Conditions as in 'b'. Line width measured by approved method at 45° intervals.					Line width (mm)	-	1.0	100%
k	Conditions as in 'b'. Trace N-S applied.					Basing. Measure angle between N-S trace and diameter of base thro' centre of key.	35°	55°	100%
l	Conditions as in 'b'. Current flowing in modulator circuit measured.					Modulator leakage current (μA)	-	3.0	100%

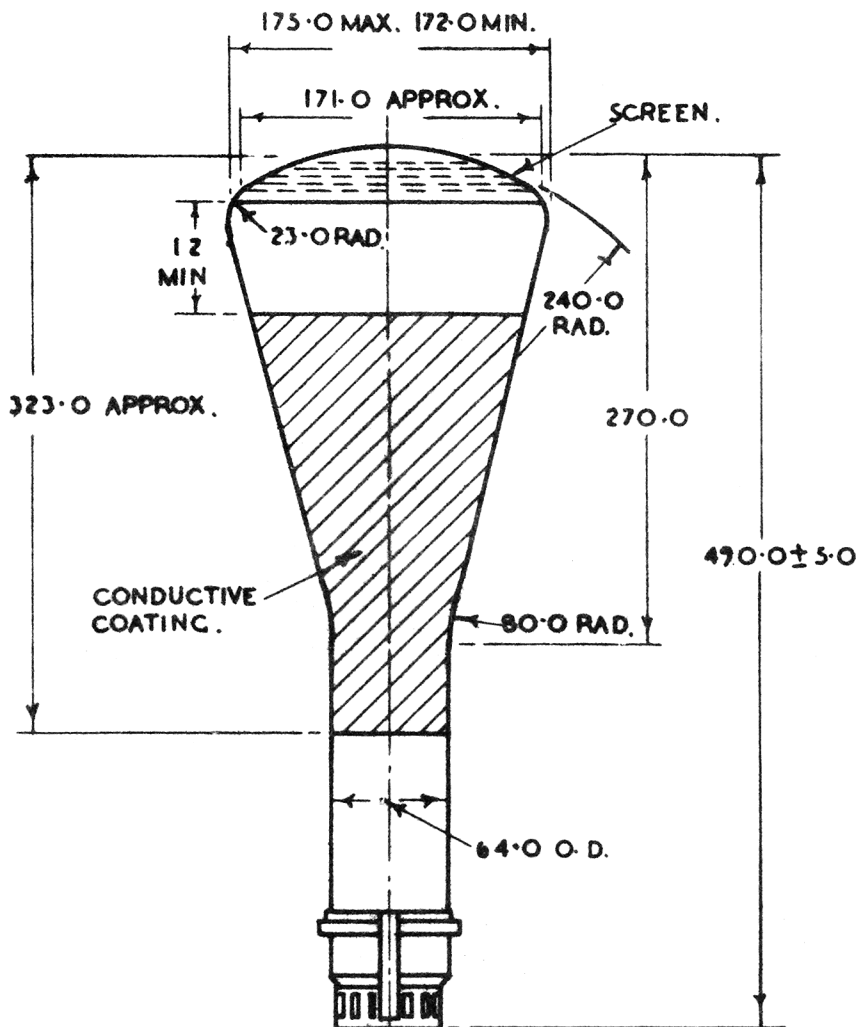

VIEW OF FREE END.

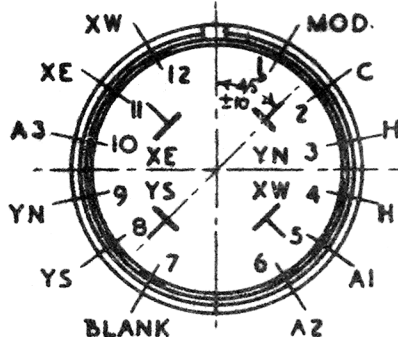

ALL DIMENSIONS
 IN MILLIMETRES.

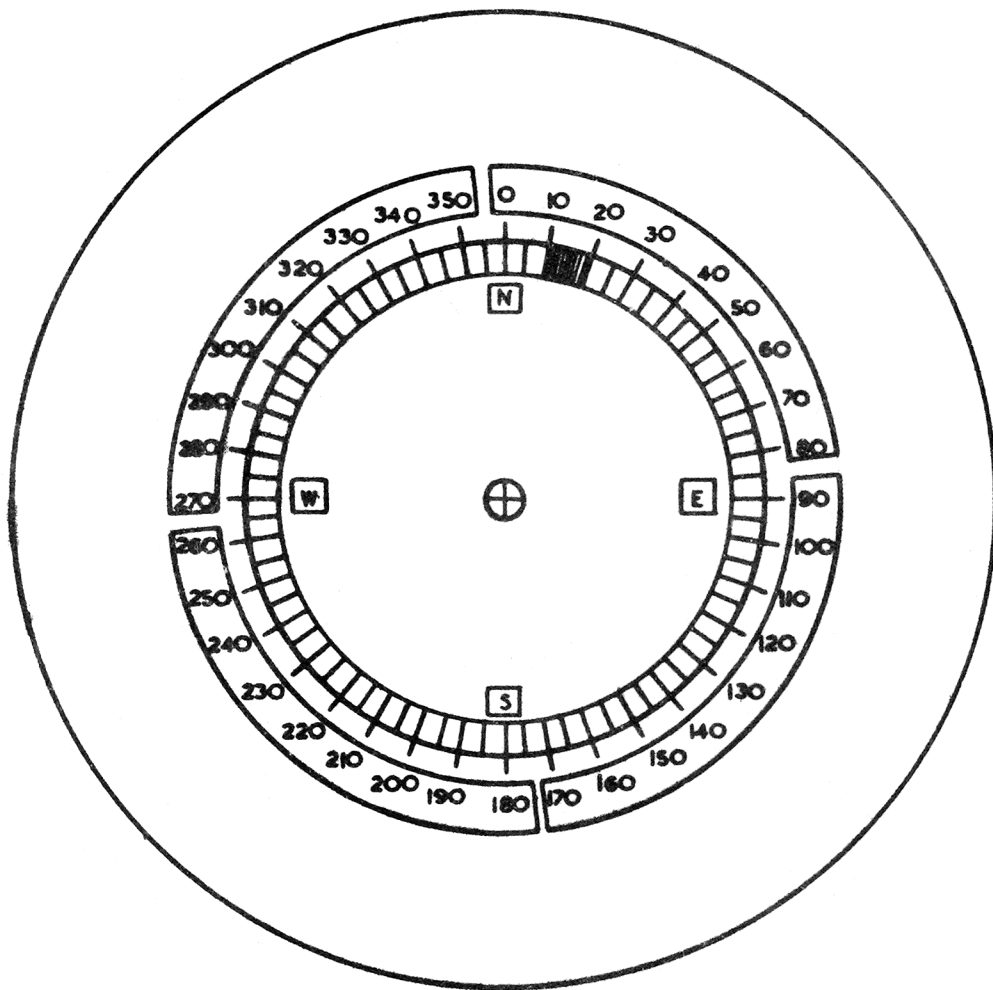

NOTE 1 THE SCALE SHALL CONSIST OF FOUR QUADRANTS AND EACH QUADRANT SHALL BE SUB-DIVIDED INTO NINETY EQUAL DIVISIONS.

NOTE 2 THE SCALE SHALL BE CENTRED ON THE MECHANICAL CENTRE OF THE SCREEN.

NOTE 3 ALL MARKINGS ON THE SCALE SHALL BE BLACK.

ELECTRONIC VALVE SPECIFICATIONS

SPECIFICATION AD/CV 987, ISSUE 2, DATED 8.7.46

AMENDMENT . NO.1.

1. Page 1. Rating

Against Value of heater current 0.715 add
"or 0.425."

2. Page 2 Test Clause (a)

Amend Limits, Min. "0.64" to read "0.38."

January, 1967

TVC for ASWE

✓ AMB
14/1/67