
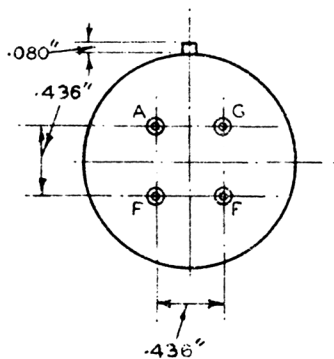


To be performed in addition to those applicable in K1001



	TEST CONDITIONS			TEST	LIMITS		No.	Note
	I _f (A)	V _a	V _g		Min.	Max.	Tested	
(a)	0.82	-	-	V _f (V)	4.1	4.8	100%	
(b)	0.82	40	40	I _e (mA)	40.0	-	100%	
(c)	0.82	150	-5	I _a (mA)	7.8	14.4	100%	
(d)	0.82	150	-5	g _m (mA/V)	1.29	2.15	100%	
(e)	0.82	150	-5	Reverse I _g (μA)	-	0.5	100%	
(f)	0.82	150	-5	μ	8.4	10.6	1%	

OUTLINE DRAWING

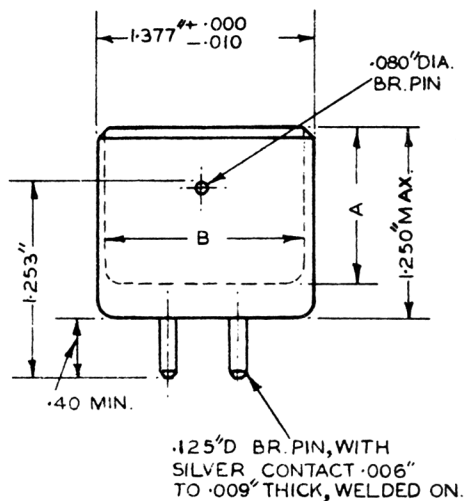

INTERNAL DIMENSIONS A & B
TO SUIT MANUFACTURERS
REQUIREMENTS.

FIG. 1. MOULDED TYPE.

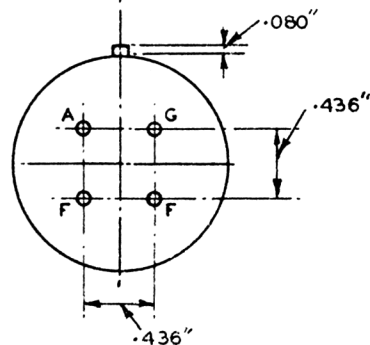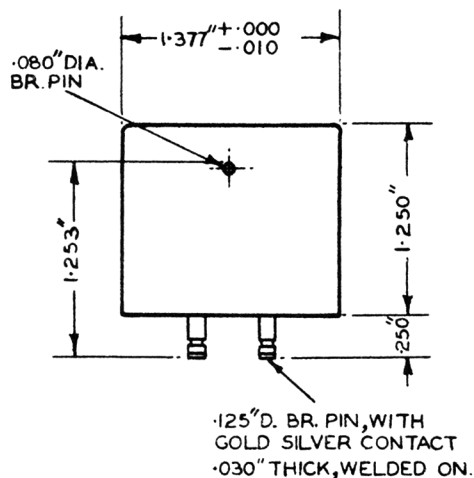

MATERIAL: - N. P. BRASS CYLINDER
WITH MOULDED INTERIOR.

FIG. 2. METAL SHELL TYPE. .