

Specification <u>MOSA/CV2137</u> Issue <u>3</u> , Dated <u>16.7.1953</u> To be read in conjunction with K.1001	<table border="1"> <tr> <td data-bbox="722 174 903 248"> <u>SECURITY</u> Specification UNCLASSIFIED </td><td data-bbox="903 174 1083 248"> Valve UNCLASSIFIED </td></tr> </table>	<u>SECURITY</u> Specification UNCLASSIFIED	Valve UNCLASSIFIED
<u>SECURITY</u> Specification UNCLASSIFIED	Valve UNCLASSIFIED		


—————> Indicates a change

TYPE OF VALVE	- Cathode Ray Tube	<u>MARKING</u> See K.1001/4 with the addition of a serial number.	
TYPE OF DEFLECTION	- Electrostatic, suitable for symmetrical or asymmetrical operation.	<u>BASE</u> B.12.D	
TYPE OF FOCUS	- Electrostatic	<u>CONNECTIONS</u>	
BULB	- Internally coated with conductive coating.	Pin	Electrode
SCREEN	- B.Y.8		
PROTOTYPE	- VCRX.263		
<u>RATING</u>		Note	
Heater Voltage	(V) 4.0	A	G
Heater Current	(A) 1.0		C
Max. Final Anode Voltage	(kV) 6.0		H
Max. First Anode Voltage	(kV) 2.0		H
"X" Plate Sensitivity	(mm/V) $\frac{720}{Va3}$		A1
"Y" Plate Sensitivity	(mm/V) $\frac{880}{Va3}$		A2
			Internal Coating
			Y2
			X2
			A3
			X1
			Y1
<u>TYPICAL OPERATING CONDITIONS</u>			<u>DIMENSIONS</u> See Drawing on page 4
Final Anode Voltage	(kV) 3.0		
Second Anode Voltage	(V) 525		
First Anode Voltage	(kV) 2.0		
Spot Size	(mm) 1.0		
<u>NOTES</u>			
A. This rating applies at normal atmospheric pressure.			
B. The tube shall be adequately free from microphony.			
C. The neck diameter may be reduced provided that rubber rings or other approved packing is supplied with the tube to bring the overall diameter within the stated tolerance.			
D. When viewing the screen with the tube positioned such that the base spigot is uppermost, a positive voltage applied to the terminal X1 shall deflect the spot to the left, and a positive voltage applied to Y1 shall deflect the spot upwards.			
E. The internal conductive coating shall be of such dimensions that it functions effectively but does not obscure the useful screen area.			

To be performed in addition to those applicable in K.1001

Test Conditions						Test	Limits		No Tested	Note
							Min.	Max.		
	Vh(V)	Va3 (kV)	Va2 (V)	Va1 (kV)	Vg (V)	<u>Inter-electrode Capacitances (pF)</u>				
a	See K.1001/5A.13					1. Each X Plate to all others 2. Grid to all others. 3. One X Plate to one Y Plate	-	25	5%	
b	4.0	0	0	0	0	Ih (A)	0.7	1.3	100% or 8	
c	4.0	3.0	Adjust for optimum focus	2.0	Adjust to cut-off	Vg (V)	-	-80	100%	
d	4.0	3.0	Adjust for optimum focus	2.0	-	1. Vg (V) 2. Change in Vg from value found in Test C 3. Within the range of Grid Voltage from cut-off to standard light the beam current shall increase continuously	-	0 40	100% 100%	
e	4.0	3.0	Adjust for optimum focus	2.0	As in Test(d)	1. Line Width (mm) 2. Va2 (V)	- 375	1.2 675	100% 100%	
	With focus adjusted for optimum, and with symmetrically deflected sine wave line trace of 50 c/s nom. recurrence, and a line length of 102mm in X and Y directions successively, the line width will be measured at the centre of the trace.									

Test Conditions						Test	Limits		No Tested	Note
							Min.	Max.		
Vh(V)	Va3 (kV)	Va2 (V)	Va1 (kV)	Vg (V)						
f	4.0	3.0	Any conven- ient value	2.0	-80	<u>Grid insulations</u>				
						Leakage (μ A)	-	16	100%	
						Voltmeter Reading	-	100%		
Recommended method - K.1001/5A.3.2 Resistor = 5 megohms										
g	4.0	3.0	Ditto	2.0	Any conven- ient value	<u>Deflection Sensitivities</u>				
						1. X Plate (mm/V)	$\frac{650}{V_{a3}}$	$\frac{790}{V_{a3}}$	5%	
						2. Y Plate (mm/V)	$\frac{790}{V_{a3}}$	$\frac{970}{V_{a3}}$	(20)	
h	4.0	3.0	Ditto	2.0	Ditto	Deviation of Spot from centre of screen (mm)	-	10	100%	
j	4.0	3.0	Ditto	2.0	Ditto	<u>Useful Screen Area Diameter</u> (mm)	130	-	100%	
k	4.0	3.0	Ditto	2.0	Ditto	<u>Orientation of Axis of Deflection</u>				
						1. Orientation of X axis of def- lection relative to 0.0' on drg. on page 4.	80°	100°	100%	
						2. Angle between X and Y axes of deflection	85°	95°	100%	
l	4.0	3.0	-	2.0	Ditto	The screen shall not be worse for graininess than a standard pattern			100%	
Deflecting field to give a raster covering the useful screen area. The spot shall be defocussed such that separate lines shall not be discernible on the raster										
m	4.0	3.0	Any conven- ient value	2.0	Ditto	Afterglow (Secs)	8	-	100%	
Test to be performed in Test Set 331.										
n	4.0	See K.1001/5A.3.3.				<u>Heater-Cathode Insulation</u>				
						Leakage Current (μ A)	-	200	100%	

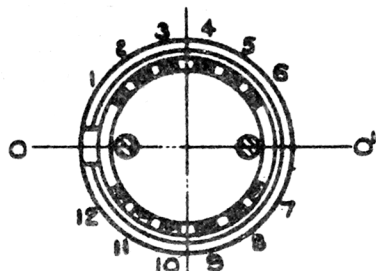

VIEW OF UNDERSIDE
OF BASE.

NOTES.

1 THE INTERNAL CONDUCTIVE COATING SHALL BE OF SUCH DIMENSIONS THAT IT FUNCTIONS EFFECTIVELY BUT DOES NOT OBSCURE THE REQUIRED USEFUL SCREEN AREA.

2 WHEN VIEWING THE SCREEN WITH THE TUBE POSITIONED SUCH THAT THE BASE SPIGOT IS UPPERMOST, A POSITIVE VOLTAGE APPLIED TO THE TERMINAL X₁ SHALL DEFLECT THE SPOT TO THE LEFT AND A POSITIVE VOLTAGE APPLIED TO THE TERMINAL Y₁ SHALL DEFLECT THE SPOT UPWARDS

3 THE NECK DIAMETER MAY BE REDUCED PROVIDED THAT RUBBER RINGS OR OTHER APPROVED PACKING IS SUPPLIED WITH THE TUBE TO BRING THE OVERALL DIAMETER WITHIN THE STATED TOLERANCES.

ALL DIMENSIONS IN MILLIMETRES

