

ADMIRALTY SIGNAL AND RADAR ESTABLISHMENT

Specification AD/CV2272 Issue No. 4 Dated : 14.2.55 To be read in conjunction with K1001	<table border="1"> <tr> <th colspan="2">SECURITY</th></tr> <tr> <td>Specification</td><td>Valve</td></tr> <tr> <td>Unclassified</td><td>Unclassified</td></tr> </table>	SECURITY		Specification	Valve	Unclassified	Unclassified
SECURITY							
Specification	Valve						
Unclassified	Unclassified						

→ Indicates a change

<u>TYPE OF VALVE:</u> Cathode Ray Tube				<u>MARKING</u> See K1001/4	
<u>TYPE OF DEFLECTION:</u> Electrostatic					
<u>TYPE OF FOCUS:</u> Electrostatic				<u>BASE</u> B9G	
<u>BULB:</u> Glass. Internally coated with conductive coating.					
<u>SCREEN:</u> BY8				<u>CONNECTIONS</u>	
<u>PROTOTYPE:</u> VCRX212				Pin Electrode	
				1	C and H
				2	G
				3	H
				4	A2
				5	X1
				6	Y1
				7	A1 and A3
				8	Y2
				9	X2
				S.C.	A4
<u>RATING</u>					
			Note		
Heater Voltage	(V)	4.0			
Heater Current	(A)	1.4	14 Anode		
Max. Fourth Anode Voltage	(kV)	5.0	A		
Max. Third Anode Voltage	(kV)	2.0	A		
Max. Second Anode Voltage	(V)	150	A		
Max. First Anode Voltage	(kV)	2.0	A		
Max. Peak Cathode Current	(μA)	500	A		
<u>TYPICAL OPERATING CONDITIONS</u>				<u>SIDE CONTACT</u> CT7 See B.S.448	
Fourth Anode Voltage	(kV)	3.5			
Third Anode Voltage	(kV)	1.5			
Second Anode Voltage	(approx.) (V)	75			
First Anode Voltage	(kV)	1.5			
Beam Current	(μA)	30			
X-Plate Sensitivity	(mm/V)	0.10			
Y-Plate Sensitivity	(mm/V)	0.093			
				<u>DIMENSIONS</u> See drawing, Page 4	
<u>NOTES</u>					
A. Absolute Maximum Value.					
B. The tube shall be of the post deflector accelerator type. The design shall be such that a change of $\pm 10\%$ in the V_{a2} voltage shall not produce an appreciable change in the cut-off voltage.					
C. When viewing the screen with the tube positioned such that the keyway on the base spigot is at 30° to the left of the vertical, a positive voltage on Pin 5 will deflect the spot to the right, and a positive voltage on Pin 8 will deflect the spot upwards.					

TESTS

To be performed in addition to those applicable in K1001


Test Conditions						Test	Limits		No. Tested
Vh (V)	Va4 (kV)	Va3 (kV)	Va2 (V)	Vg (V)	Min.		Max.		
All deflecting voltages shall be symmetrical									
a	See K1001/5A.13					Capacitances (pF) 1. Each X or Y plate to all other electrodes. 2. Each X plate to each Y plate. 3. Grid to all other electrodes.	-	12.0	5%
							-	3.0	
							-	20.0	
b	4.0	0	0	0	0	Ih <i>Grid 2</i> (A)	<i>0.4</i> 1.0	1.2	100% or S
c	4.0	3.5	1.5	Adjusted for optimum focus	Adjusted for cut-off	Cut-Off Negative Vg (V)	40	120	100%
d	4.0	3.5	1.5	- do -	-	1. Change in value of Vg from test (c) (V) 2. Within the range of grid voltage from cut-off standard light output the beam current shall increase continuously.	-	35	100%
e	4.0	3.5	1.5	- do -	-	1. Line Width (mm) 2. Va2 (V)	-	0.5 110	100% 100%
Deflection With a sine wave time base of 10 kc/s nom. and line length of 35 mm. in X and Y directions successively, the line width shall be measured at the centre of the trace. Grid The grid shall be pulsed positively from cut-off with amplitude equal to the value obtained in test (d) 1, the nom. values of pulse duration and recurrence rate being 100 p.p.s. and 100 c/s respectively									
f	4.0 or	3.5	1.5	- do -	-120	Grid Insulation 1. Leakage Current (μ A) 2. Increase in Volt-meter reading.	-	12 100%	100% 100%

TESTS


To be performed in addition to those applicable in K1001

	Test Conditions					Test	Limits		No. Tested
	Vh (V)	Va4 (kV)	Va3 (kV)	Va2 (V)	Vg (V)		Min.	Max.	
g	4.0	3.5	1.5	- do -	Any convenient value	<u>Deflection Sensitivities</u> 1. X-Plate (mm/V) 2. Y-Plate (mm/V)	0.095 0.086 0.080 0.075	0.125 0.143 0.107 0.100	5% (20) 5% (20)
h	4.0	3.5	1.5	- do -	- do -	<u>Spot Displacement</u> Deviation of spot from centre of screen (mm)	-	3	100%
j	4.0	3.5	1.5	- do -	- do -	<u>Useful Screen Area</u> Diameter (mm)	35	-	100%
	See K1001/5A.12								
k	4.0	3.5	1.5	- do -	- do -	Angle between X and Y axes of deflection.	88°	92°	100%
l	4.0	3.5	1.5	- do -	- do -	1. Orientation of Y axis of deflection relative to axis through keyway on base spigot.	20°	40°	100%
						2. Orientation of diameter line through side contact relative to axis through keyway on base spigot.	-	±10°	100%

Annex 3.

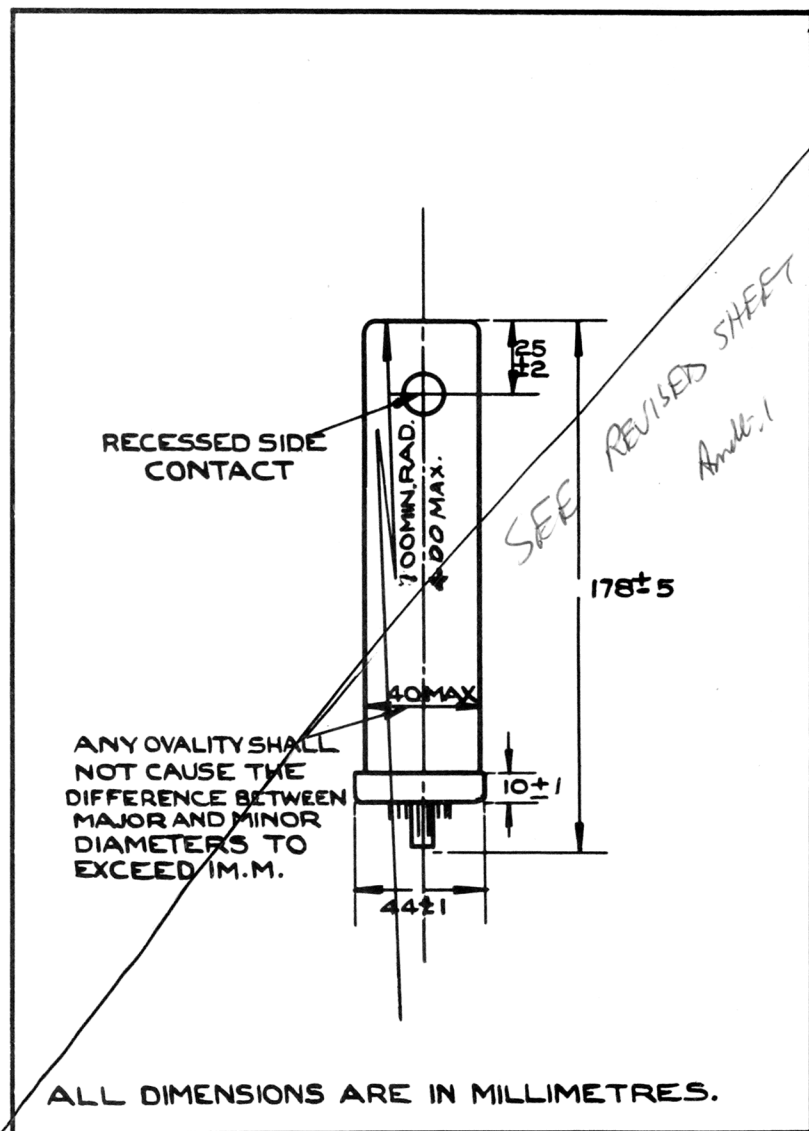

CV2272/4/IV

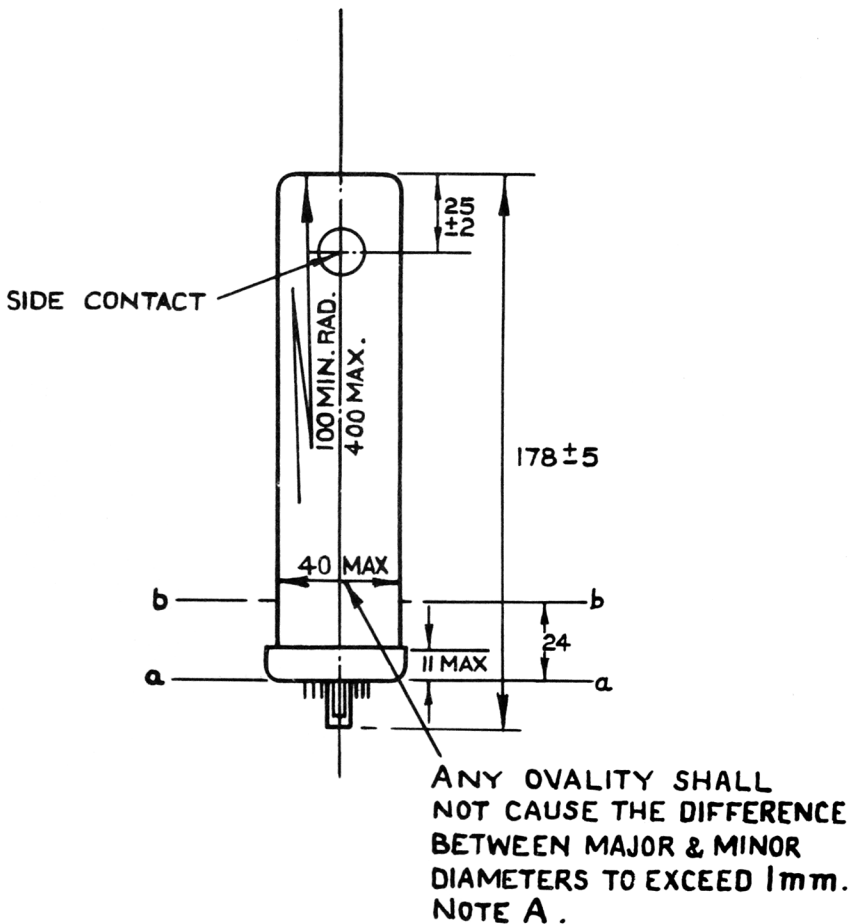

NOTE A.

OVER THE DISTANCE a-a TO b-b THE DIAMETER SHALL BE $40 \pm 2 \text{ m.m.}$ EXCEPT THAT FOR A DISTANCE OF 11 m.m. MAX. FROM a-a IT MAY BE $44 \pm 1 \text{ m.m.}$

ALL DIMENSIONS ARE IN MILLIMETRES.

ELECTRONIC VALVE SPECIFICATIONS .
SPECIFICATION AD/CV2272 ISSUE NO. 4 DATED 14.2.55
AMENDMENT NO. 1

Page 1. Ratings.

Against 'Heater Current', amend '1.1' to read '0.94'.

Page 2. Test Clause 'b'.

In the 'Minimum Limits' column amend '1.1' to read '0.94'.

Page 4. Outline Drawing.

Cancel but do not destroy existing Page 4 and substitute new Page 4 attached hereto.

T.V.C. for
A.S.W.E.

October, 1963.

JAP 7/63
204696

ELECTRONIC VALVE SPECIFICATIONS
SPECIFICATION AD/CV2272 ISSUE NO. 4 DATED 14.2.55
AMENDMENT NO.2

Page 2 Test Clause (b) 1h

In the 'Minimum Limits' column, amend '1.0'
(subsequently amended to '0.94' by Amendment No.1) to read
'0.85'.

December, 1963
(190440)

T.V.C. for A.S.W.E.

✓ 741
17/3/64

ELECTRONIC VALVE SPECIFICATIONS

SPECIFICATION AD/CV2272 ISSUE No. 4 DATED 14.2.55

AMENDMENT NO. 3

Page 3 Test Clause (g) Deflection
Sensitivities

In the column headed 'Limits' amend:-

- (a) X-Plate Min. '0.086' and Max. '0.113' to read '0.095' and 0.125' respectively.
- (b) Y-Plate Min. '0.080' and Max. '0.107' to read '0.075' and '0.100' respectively.

February 1964
(222023)

T.V.C. for A.S.W.E.

✓ RAB
28/5/64