

Page 1 (No. of pages:- 5)

MINISTRY OF SUPPLY (R.R.D.E.)

VALVE ELECTRONIC

CV 2274

Specification MOS/CV2274/Issue 2. Dated:- 6.2.53 To be read in conjunction with K1001 ignoring clauses:- 5.2, 5.8	<u>SECURITY</u>	
	<u>Specification</u> Unclassified	<u>Valve</u> Unclassified

<u>TYPE OF VALVE:-</u> Broad Band T.B. Cell			<u>MARKING</u>	
<u>PROTOTYPE:-</u> VX4134			See K1001/4	
<u>RATING</u>		Note	<u>DIMENSIONS</u>	
Min. transmitter peak power (kW)	5.0		See drawing page 4	
Max. transmitter peak power at 0.001 duty cycle (kW)	100		<u>PACKAGING</u>	
Frequency coverage (Mc/s)	9500 to 9700			
<u>NOTES</u>				
1. At least one washer of the dimensions shown in the drawing on page 4 shall be supplied with each valve.				

Z.4488.R.

CV 2274/2/1

To be performed in addition to those applicable in K1001.

	Test Conditions	Test	Limits		No. Tested	Note
			Min.	Max.		
a	Valve mounted as shown in drawing on page 5 and terminated in a matched load. Test frequency = $9600 \text{ Mc/s} \pm 0.05\%$ .	<u>Tuning Susceptance</u>	-0.06	+0.06	100%	1
b	As for test "a".	Equivalent Conductance	-	0.05	100%	2
c	Valve mounted as shown in drawing on page 5 and terminated in a matched load. Test frequency in band 9500-9700 Mc/s. Line to be energised with 4 kW peak RF with $T_p = 1.0 \text{ } \mu\text{sec.} \pm 10\%$ and p.r.f. = $1000 \text{ c/s} \pm 10\%$ . Test to be performed at least 7 days after pumping, and at least 24 hours after any previous discharge.	<u>Firing Time</u> (secs) Time interval between application of power and tube firing.	-	10	100%	
d	As for test "c"	<u>Arc Loss</u> (db)	-	0.8	100%	3
e	Valve mounted as shown in drawing on page 5 and terminated in a matched load. Test frequency in band 9500-9700 Mc/s. Line to be energised with 12-15 kW peak RF test power derived from a higher power source through an attenuation of not less than 6 db with $T_p = 1 \text{ } \mu\text{sec.} \pm 10\%$ and p.r.f. = $1000 \text{ c/s} \pm 10\%$ .	<u>Recovery Loss</u> (db) After 2 $\mu\text{sec.}$ (measured between trailing edge of transmitter pulse and leading edge of signal pulse of frequency $9600 \text{ Mc/s} \pm 0.05\%$ ).	-	2.0	100%	
f	As for test "a"	<u>Loaded Q</u>	-	6.5	T.A.	4

	Test Conditions	Test	Limits		No. Tested	Note
			Min.	Max.		
g	As for test "e" Load standing wave ratio to be better than 0.97	<u>High Level Standing Wave Ratio</u>	0.91	-	5%	5

NOTES

1. The susceptance may be measured by comparing the phase of the reflector with that of the valve that is resonant at the test frequency. The susceptance is given by:-

$$\frac{B}{Y_0} = \frac{1 + 2 \frac{G}{Y_0}}{2} \tan \frac{4\pi\Delta 1}{\lambda_g} \approx (1.1) \frac{2\pi\Delta 1}{\lambda_g} \text{ for small } \Delta 1$$

Where  $\lambda_g$  is the guide wavelength and  $\Delta 1$  is the phase shift measured in the same units as  $\lambda_g$  and where  $G/Y_0$  is assumed to be 0.05.

2. A curve of SWR vs. Frequency is plotted around a centre value of 9600 Mc/s. The valve is resonant ( $B = 0$ ) at the frequency corresponding to the maximum SWR. The value of SWR is:-

$$S = \frac{1}{\frac{G}{Y_0}} + 1 \text{ therefore } G/Y_0 = \frac{1}{S - 1}$$

If the valve has passed the susceptance test ( $B < 0.06 Y_0$ ), the SWR measured as 9600 Mc/s is very nearly equal to  $\frac{1}{G/Y_0} + 1$  and may be used to measure  $G$ .


3. The power loss in the arc shall be less than 680 W peak:-

$$\frac{p}{p - p_L} = \frac{4000}{4000 - 680} = 1.20 \text{ (0.8 db)}$$

4. Loaded Q is defined as:-

$$Q_L = F_0 \frac{dB/Y_0}{dF} \quad \text{where } F_0 = 9600 \text{ Mc/s.}$$

$$\frac{1}{2(1 - G/Y_0)}$$


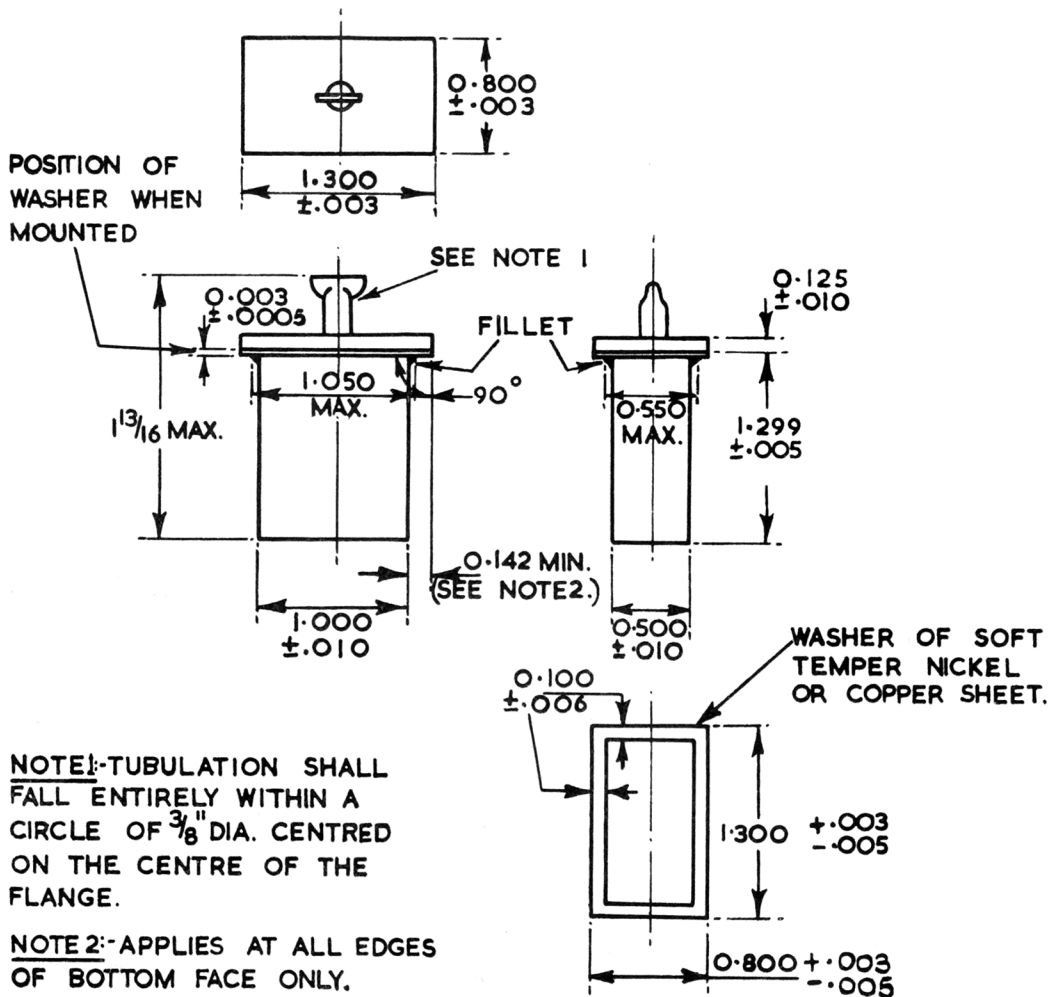


ALL DIMENSIONS IN INCHES.

MOUNT FOR TESTING CV2274



NOTE 1. 0.015 CUT-AWAY AT SIDE OF WAVEGUIDE  
MEASURED FROM THE PLANE OF THE  
INNER SURFACE OF THE TOP OF THE  
WAVEGUIDE.

NOTE 2. 0.030 TO 0.040 SPACING ALL ROUND THE  
VALVE.




NOTE 1.

SECTION AA OF  
MOUNT SHOWING  
VALVE IN  
POSITION.



SECTION BB OF  
MOUNT SHOWING  
VALVE IN  
POSITION.



SECTION CC  
OF MOUNT  
SHOWING  
VALVE IN  
POSITION.

1.296 ± .001 WITH WASHER  
OR 1.299 ± .001 WITHOUT  
WASHER.

NOTE 2.

PIECE OF STRAIGHT  
WAVEGUIDE OF  
INTERNAL DIMENSIONS  
0.4 BY 0.9.

ALL DIMENSIONS IN INCHES.