

MINISTRY OF SUPPLY - D.L.R.D.(A)/R.A.E.

Specification MOSA/CV.2964 Issue 1 Dated 13.4.55 To be read in conjunction with BS448 BS1409 and K1001	<table border="1"> <tr> <th colspan="2">SECURITY</th></tr> <tr> <td>Specification</td><td>Valve</td></tr> <tr> <td>UNCLASSIFIED</td><td>UNCLASSIFIED</td></tr> </table>	SECURITY		Specification	Valve	UNCLASSIFIED	UNCLASSIFIED
SECURITY							
Specification	Valve						
UNCLASSIFIED	UNCLASSIFIED						

—————→ Indicates a change

TYPE OF VALVE - Transmitting Tetrode				<u>MARKING</u>	
CATHODE - Directly Heated				See K.1001/4	
ENVELOPE - Glass, unmetallised					
PROTOTYPE - 5D22					
<u>RATINGS</u>				<u>BASE</u>	
(All limiting values are absolute)				B.S.448/B5E	
				<u>CONNECTIONS</u>	
				Note	
				Pin	Electrode
Filament Voltage	(V)	5.0		1	f
Filament Current	(A)	14.1		2	g2
Max. Anode Voltage	(kV)	4	B	3	g1
Max. Screen Voltage	(V)	600	B	4	g2
Max. Anode Dissipation	(W)	250	B	5	f
Max. Screen Dissipation	(W)	35	B	T.C.	a
Max. Control Grid Dissipation	(W)	10	B		
Max. D.C. Control Grid Voltage	(V)	-500	B		
Max. D.C. Anode Current	(mA)	350	B		
Mutual Conductance	(mA/V)	4.0			
Inner Amplification Factor (μ g1,g2)		5.25			
Max. Anode Top Cap Temperature		170°C	A		
<u>CAPACITANCES (pF)</u>				<u>DIMENSIONS</u>	
C in (nom.)		12.6		See Drawing on Page 3	
C out(nom.)		4.4			
Ca, g1(max.)		0.14			
<u>NOTES</u>					
A. Forced Air cooling is required at frequencies above 30 Mc/s. The temperature of the anode seal shall not exceed 170°C. The base seals shall be cooled by the circulation of at least 2 cubic feet of air per minute.					
B. Class C. Telegraphy.					

To be performed in addition to those applicable in K.1001

Test Conditions						Test	Limits		No Tested	Note
							Min.	Max.		
	See K.1001/AIII					CAPACITANCES (pF)	10.70	14.50	6 per week	
	Links to H.P.	Links to L.P.	Links to E							
	3	1,2,4,5,	6,7,8,9,10, T.C.1,T.C.2							
a	T.C.1	1,2,4,5	3,6,7,8,9, 10,T.C.2			C in	3.70	5.10	T.A.	
	T.C.1	3	1,2,4,5,6, 7,8,9,10, T.C.2			Ca, g1	-	0.14		
	Vf	Va(kV)	Vg2	Vg1	Ia(mA)	If (A)	13.5	14.7	100% or S	
b	5.0	0	0	0	0					
c	6.0	See Note 1				g1 Primary Emission (μA)	-	500	100%	1
d	6.0	See Note 2		0	-	g2 Primary Emission (μA)	-	500	100%	2
e	5.0	2.5	500	Adjust	100	Vg1 (V)	-65	-95	100%	
f	5.0	2.5	500	Adjust	100	Ig1 (μA)	-	10	100%	
g	5.0	-	500	Adjust	-	μg1,g2	4.5	6.0	20 per week	3
h	5.0	Anode, g2 and g1 Strapped with 2.5 kV Peak applied				Peak Emission (A)	4.0	-	100%	
j	5.0	3.0	350	-	200	Power Output (W) Ig2 (mA)	350 50	- 100	20 per week	4
k	5.0	3.0	350	-	200	Power Output (W)	350	-	T.A.	5

NOTES

- (1) With anode and g2 floating, the 50c/s A.C. volts applied to g1 through suitable rectifiers, shall be adjusted to heat the grid during the (+)ve half cycles and give a mean Ig1 = 200 mA D.C. The grid emission shall be measured during (-)ve half cycles. Test duration to be 15 seconds minimum.
- (2) With anode floating, the 50 c/s A.C. volts applied to g2 through suitable rectifiers shall be adjusted to heat the grid during the (+)ve half cycles and give a mean Ig2 = 170 mA D.C. The grid emission shall be measured during (-)ve half cycles. Test duration to be 15 seconds minimum.

NOTES (Cont'd)

- (3) Anode earthed, V_{g1} adjusted to give:


$$I_{g2} = 70 \text{ mA.}$$

- (4) Power oscillation test frequency = 15 Mc/s:

$$R_{g1} = 12,000 \text{ ohms.}$$

- (5) Power oscillation test frequency = 75 Mc/s:

$$R_{g1} = 12,000 \text{ ohms.}$$

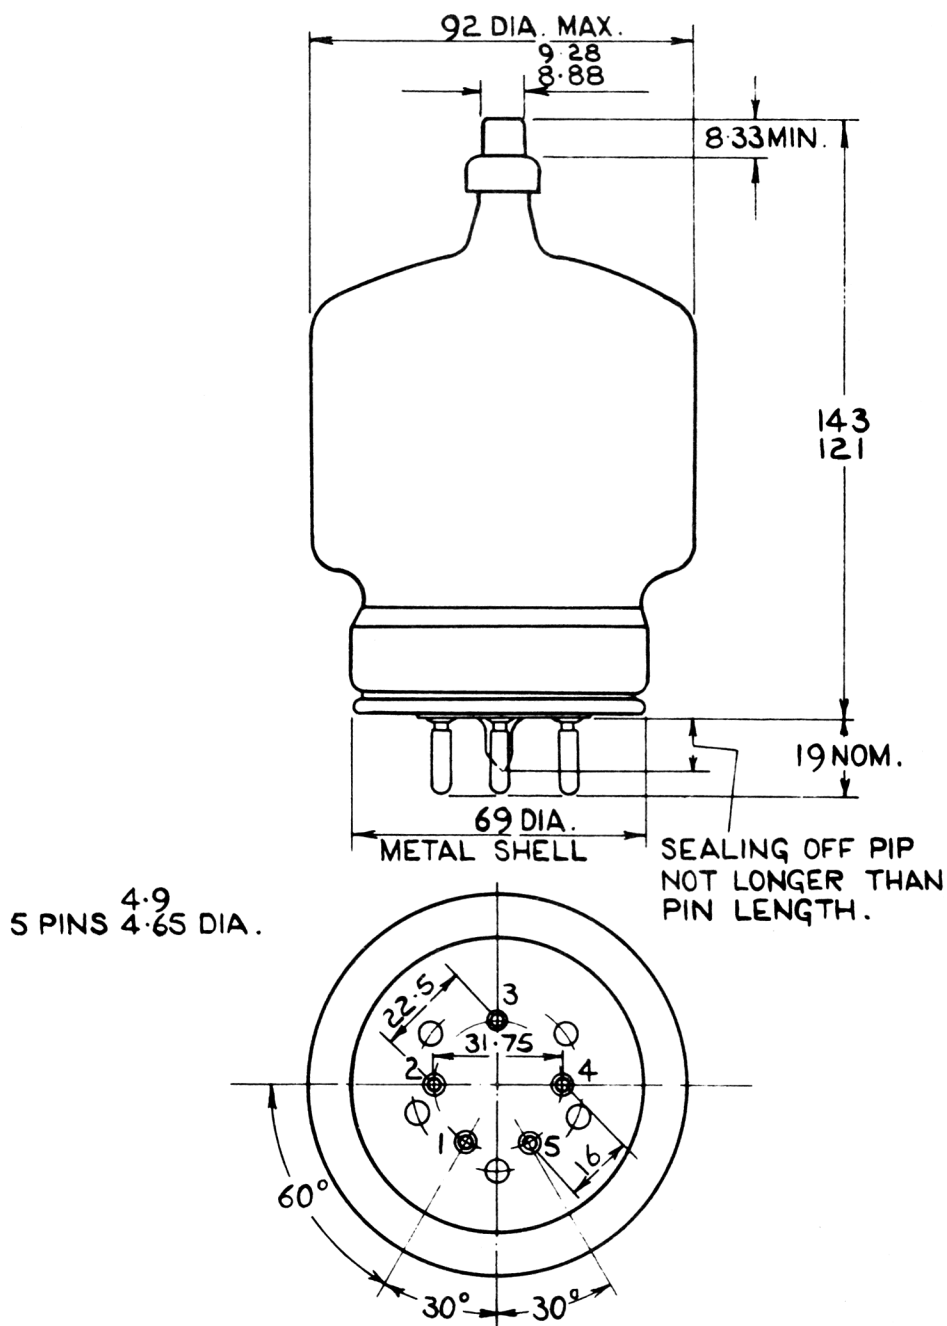

ALL DIMENSIONS IN MILLIMETRES