


Specification MOA/CV4072 Issue 2 dated 27th March 1963 To be read in conjunction with K1001, BS448 and BS1409	<table border="1"> <tr> <th colspan="2"><u>SECURITY</u></th></tr> <tr> <th><u>Specification</u></th><th><u>Valve</u></th></tr> <tr> <td>UNCLASSIFIED</td><td>UNCLASSIFIED</td></tr> </table>	<u>SECURITY</u>		<u>Specification</u>	<u>Valve</u>	UNCLASSIFIED	UNCLASSIFIED
<u>SECURITY</u>							
<u>Specification</u>	<u>Valve</u>						
UNCLASSIFIED	UNCLASSIFIED						

→ Denotes a change

TYPE OF VALVE - Reliable high voltage, half wave rectifier	<u>MARKING</u> See K1001/4
CATHODE - Indirectly heated	<u>BASE</u> See drawing on page 2
ENVELOPE - Glass	
EQUIVALENT PINNED VALVE - CV4071	
<u>RATING, CAPACITANCES AND NOTES</u> See specification MOA/CV4071 Issue 2 Dated 27th March, 1963.	<u>CONNECTIONS</u> See drawing on page 2
	<u>DIMENSIONS</u> See K1001/A1/D1 and drawing on Page 2.
Joint Services Cat N° 5960-99-000-4072	<u>MOUNTING POSITION</u> Any

TESTS

The tests required by specification MOA/CV4071 shall be performed.

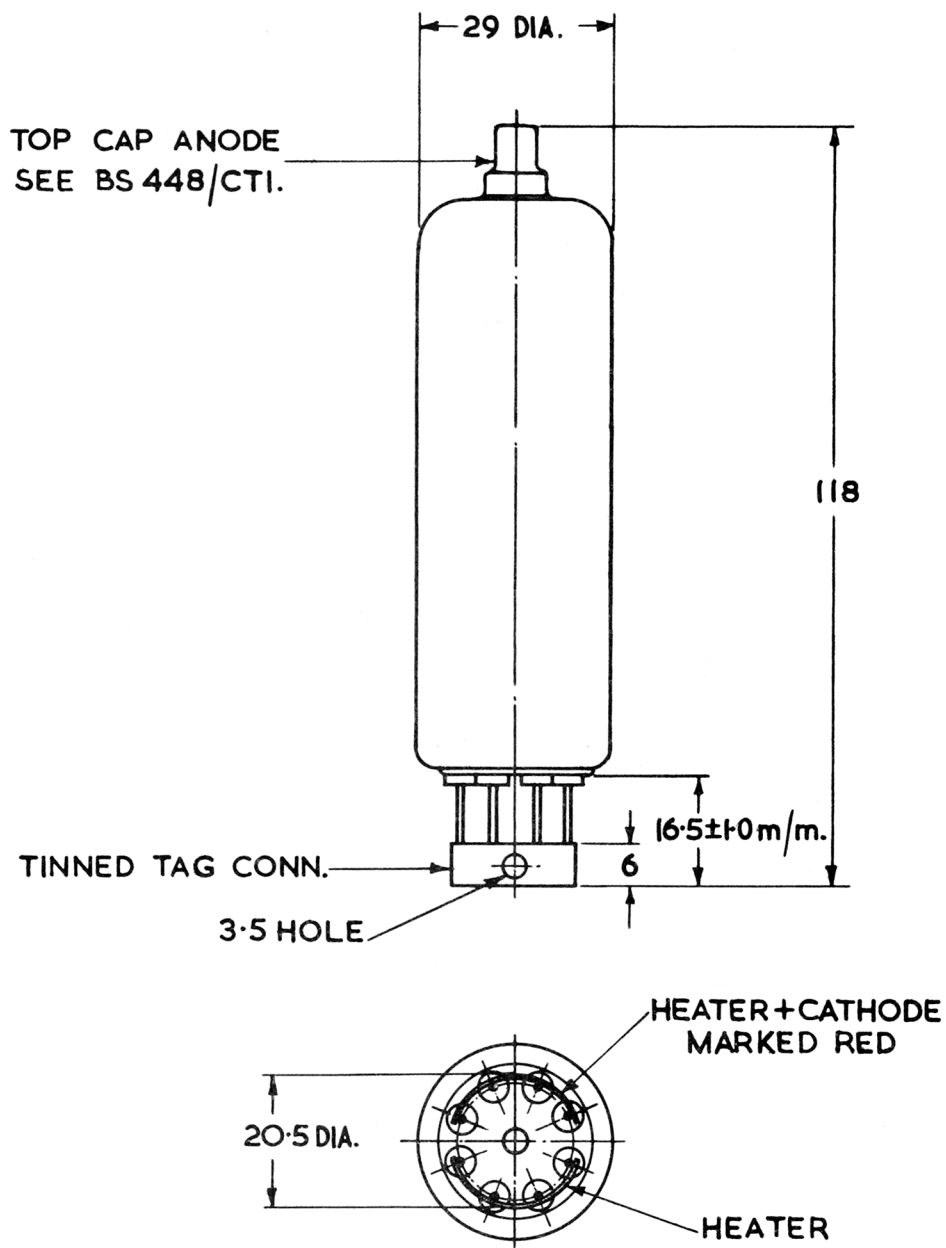

EXTERNAL VIEW

ALL DIMENSIONS IN MILLIMETRES