

MINISTRY OF SUPPLY (R.R.E.)

VALVE ELECTRONIC CV5110

Specification MOS/CV5110	<u>SECURITY</u>	
Issue 1 dated 12.12.57	<u>Specification</u>	<u>Valve</u>
To be read in conjunction with K1001	Unclassified	Unclassified

<u>TYPE OF VALVE:-</u> H.F. Pentode, variable-mu.  <u>CATHODE:-</u> Indirectly heated.  <u>ENVELOPE:-</u> Glass-metallised  <u>PROTOTYPE:-</u> CV1053				<u>MARKING</u>	
				See K1001/4.	
				<u>BASE</u>	
				I.O.	
<u>RATING</u>				<u>CONNECTIONS</u>	
				Pin	Electrode
Heater Voltage	(V)	6.3		1	Metallising
Heater Current	(A)	0.2		2	Heater
Max. Anode Voltage	(V)	300		3	Anode
Max. Screen Voltage	(V)	300		4	Screen Grid
Max. Anode Dissipation	(W)	2.0		5	Suppressor Grid
Max. Screen Dissipation	(W)	0.3		6	Pin Omitted.
Mutual Conductance				7	Heater
(1)	(mA/V)	2.2	A	8	Cathode
(2)	(mA/V)	0.0045	B	T.C.	Control Grid
Anode Impedance					
(1)	(m)	1.25	A		
(2)	(m)	10	B		
Max. Operating Frequency	(Mc/s)	20			
<u>CAPACITANCES</u> (pF)				<u>TOP CAP</u>	
C <sub>ae</sub>		7.9		See K1001/AI/D5.2	
C <sub>ge</sub>		5.6		<u>DIMENSIONS</u>	
C <sub>ag</sub> (max.)		0.003		Dimension	Min. Max.
<u>NOTES</u>				Overall length (mm)	95 100
A. At V <sub>a</sub> = 250V, V <sub>g2</sub> = 100V. V <sub>g1</sub> = -2.5V, I <sub>a</sub> = 6 mA.				Diameter (mm)	- 32
B. At V <sub>a</sub> = V <sub>g2</sub> = 250V, V <sub>g1</sub> = -49V					

CV5110/1/1

CV5110

TESTSTo be performed in addition to those applicable in K.1001

Test Conditions						Test	Limits		No. Tested
							Min.	Max.	
a	See K1001/AIII					Capacitances (pF)			
	Links to H.P.	Links to L.P.	Links to E						
	3	1, 2, 4, 5, 7, 8.	TC1, 6, 9, 10, TC2			C <sub>ae</sub>	7.0	9.4	6 per week
	TC1	1, 2, 4, 5, 7, 8.	3, 6, 9, 10, TC2			C <sub>ge</sub>	4.8	6.4	
	3	TC1	1, 2, 4, 5, 6, 7, 8, 9, 10, TC2.			C <sub>ag</sub>	-	0.003	T.A.
b	V <sub>h</sub> (V)	V <sub>a</sub> (V)	V <sub>g2</sub> (V)	V <sub>g3</sub> (V)	I <sub>a</sub> (mA)	I <sub>h</sub> (A)	0.18	0.22	100% or S
	6.3	0	0	0	0				
c	6.3	250	100	0	6	V <sub>g1</sub> (V)	-1.9	-3.1	100%
d	6.3	250	100	0	6	I <sub>g2</sub> (mA)	1.4	2.0	100% or S
e	6.3	250	100	0	6	G <sub>m</sub> (mA/V)	1.8	2.6	100%
f	6.3	250	100	0	6	Reverse I <sub>g</sub> (uA)	-	0.5	100%
g	6.3	200	200	0	10uA	V <sub>g1</sub> (V)	-35	-52.5	100%
h	6.3					<u>Measured Gain</u> Ideal Linear Gain. (See Note 2)	0.83	1.01	100%

NOTES

1. Peak grid swing  $\pm$  0.5 volts.
2. To be rested in an equipment approved by R.R.E. See drawings page 3.

Principle of Test. This is illustrated in fig. 2 on page 3. With V<sub>g</sub> (D.C.), (grid to earth) set to 108 volts, the ratio  $\frac{\text{Measured Gain}}{\text{Ideal Linear Gain}}$  is set to be unity.

Then with V<sub>g</sub> (D.C.) set to 48 volts the ratio  $\frac{\text{Measured Gain}}{\text{Ideal Linear Gain}}$  (Y/X) shall be within the limits given.

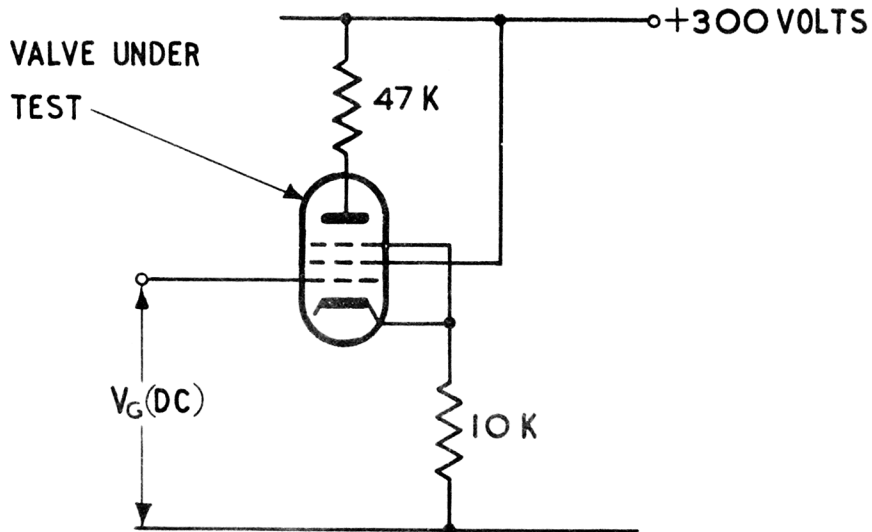


FIG. 1.  
TEST CIRCUIT

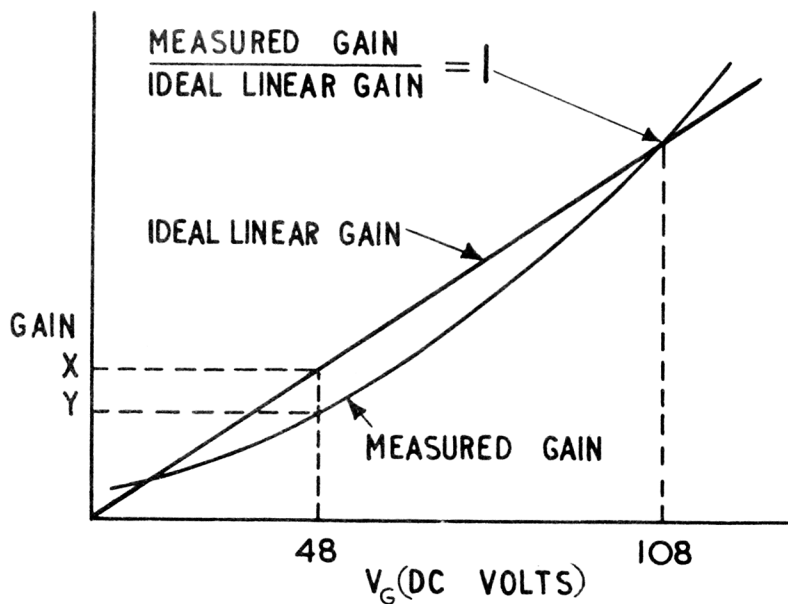


FIG. 2.  
PRINCIPLE OF TEST