

## INSTRUMENT CATHODE-RAY TUBE

14 cm-diagonal rectangular flat-faced direct-view storage tube with split-beam writing gun, variable persistence and internal graticule, intended for oscilloscope applications.

### QUICK REFERENCE DATA

Final accelerator voltage	$V_{g10} (\ell)$	8,5	kV
Useful scan (10 x 8 divisions of 9 mm)		90 x 72	mm
Deflection coefficient, horizontal	$M_x$	9,5	V/div
	$M_{y'}$	8,5	V/div
	$M_{y''}$	8,5	V/div
Overlap of the systems		100	%
Writing speed		1	cm/ $\mu$ s

### SCREEN

Metal-backed phosphor

	Colour	Persistence (non-store mode)	Persistence (store mode)
L14-130GH/55	green	medium short	variable

Useful screen dimensions	min.	90 x 72	mm
Useful scan, horizontal	min.	90	mm
	min.	72	mm
vertical (each system)		100	%
overlap			
Spot eccentricity in horizontal direction	max.	6	mm
	max.	9	mm
in vertical direction			

The scanned raster can be aligned with the internal graticule by means of correction coils fitted around the tube by the manufacturer.

### HEATING

#### Writing section

Indirect by a. c. or d. c. ; parallel supply

Heater voltage	$V_f$	6,3	V
Heater current	$I_f$	300	mA

#### Viewing section


Indirect by d. c. ; parallel supply

Heater voltage	$V_{f'}$	6,3	V
Heater current	$I_{f'}$	300	mA
Heater voltage	$V_{f''}$	6,3	V
Heater current	$I_{f''}$	300	mA

Blue Binder, Tab 4

## MECHANICAL DATA

Dimensions in mm

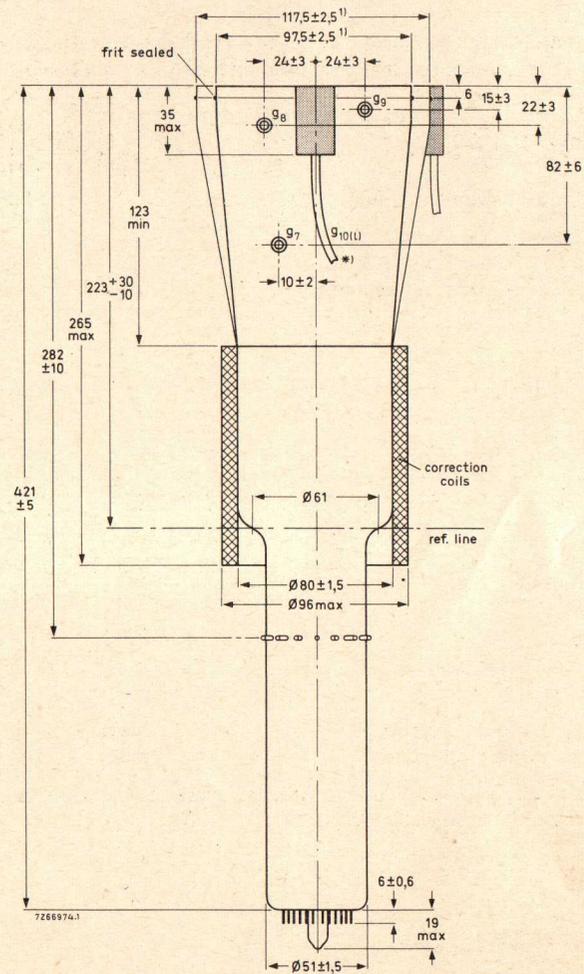

\* min. length of cable: 420 mm

<sup>1)</sup> The bulge at the frit seal may increase the indicated max. values by not more than 3 mm.

**OPERATING NOTES**

**Modes of operation**

**1 Store mode**

**a. Dynamic erasure (variable persistence)**

Dynamic erasure can be achieved by applying erasing pulses of positive polarity to the backing electrode. The pulse amplitude required is approximately 9 V (< 15 V) and the persistence of a stored display can be controlled by varying the duty factor of these pulses.

**b. Static erasure**

If no dynamic erasing pulses are applied, the storage time is limited by the potential shift of the storage layer due to landing of positive ions. In order to erase a stored display, the backing electrode should first be connected to the collector electrode voltage and then returned to its original potential for about 100 ms; after that, an erasing pulse of positive polarity and a duration of not less than 300 ms should be applied. For the adjustment of the amplitude of this pulse see "Procedure of adjustment".

**2 Non-store mode**

For non-store operation, it is sufficient to make the backing electrode about 35 V negative with respect to the viewing gun cathodes. The viewing guns should not be switched off in this mode of operation since slight variations in raster geometry and deflection sensitivity might otherwise be caused. Care should be taken, especially when switching from store mode to non-store mode, that excessive writing beam current is avoided, otherwise the storage layer may be damaged.

**Procedure of adjustment**


**a. Adjust the cathode current of each viewing gun to 0,4 mA by means of its control grid voltage.**

**b. Adjustment of the erasing pulse amplitude (static erasure)**

The pulse amplitude should be just sufficient to suppress any background illumination at the centre of the display area (this adjustment should be done under low ambient light conditions). Data on storage time and maximum writing speed are based on erasure to "just black". A larger pulse amplitude (erasure to "blacker than black") yields a longer storage time at the expense of maximum writing speed. On the other hand, writing speed can be increased if some background illumination is tolerable. To erase to "just black" the amplitude of this pulse is approximately 9 V.

**c. Adjustment of the collimator voltage**

With dynamic erasing pulses applied and a persistence control setting that yields a convenient background illumination intensity, the collimator voltage is adjusted for optimum background uniformity. This voltage will be approximately 80 V with respect to the viewing gun cathode potential. If this voltage is too high or too low, there is a decrease in intensity at the four corners or at the centres of the vertical edges of the display area respectively.

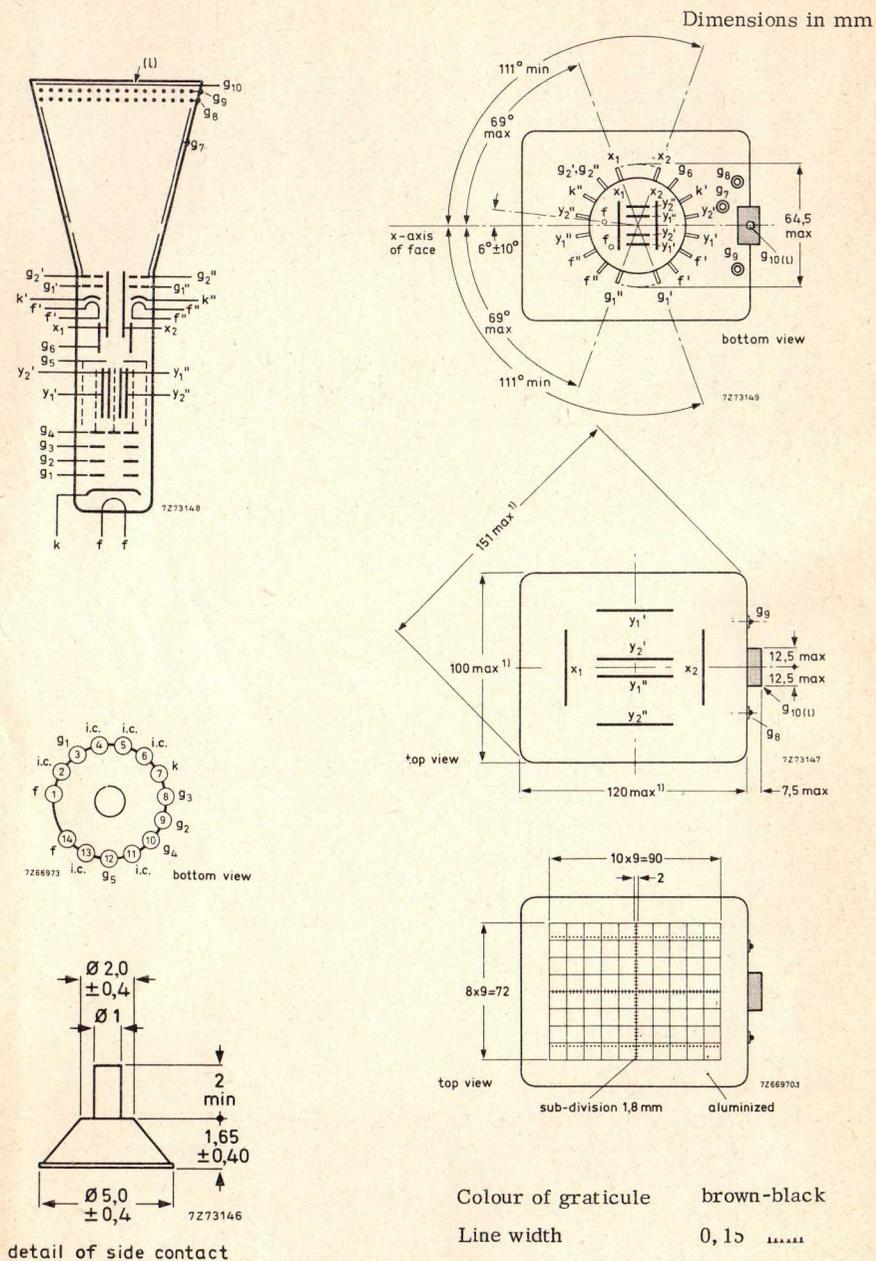

Mounting position: any

The tube should not be supported by the base alone and under no circumstances should the socket be allowed to support the tube.

The tags near the screen should not be subjected to mechanical stress.

Dimensions and connections

See also outline drawing

Overall length (socket included)	max.	445	mm
Face dimensions	max.	100 x 120	mm
Net mass	approx.	1,1	kg
Base		14 pin, all glass	

Accessories

Socket (supplied with tube)	type	55566
Side contact connector (16 required)	type	55561

**FOCUSING**

electrostatic

**DEFLECTION**

double electrostatic

x-plates

symmetrical

y-plates

symmetrical

If use is made of the full deflection capabilities of the tube the deflection plates will block part of the electron beams; hence a low impedance deflection plate drive is desirable.

Angle between x and y traces, each beam  $90^\circ$

Angle between x-trace and x-axis of the internal graticule  $0^\circ$

Angle between corresponding y-traces at the centre of the screen  $< 45'$

See also "Correction coils"

**LINE WIDTH**

Measured in the centre of the screen with the shrinking raster method, under typical operating conditions, adjusted for optimum spot size at a beam current  $I_b = 5 \mu\text{A}$  per system (measured against x-plates)

Line width at the centre of the screen l. w. 0,40 mm

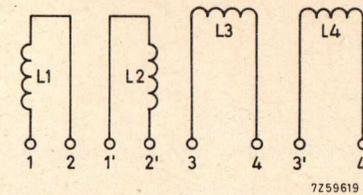


Fig. 1

Orthogonality (coils L<sub>3</sub> and L<sub>4</sub>)

The current required under typical operating conditions without a mu-metal shield being used is max. 20 mA for complete correction of orthogonality.

With a shield it will be 30% to 50% lower, depending on the shield diameter. The resistance of the coil is approx. 225  $\Omega$ .

Image rotation (coils L<sub>1</sub> and L<sub>2</sub>)

The image rotation coils are wound concentrically around the tube neck.

Under typical operating conditions 22 ampere-turns are required for maximum rotation of  $5^\circ$ . Both coils have 850 turns. This means that a current of max. 12,5 mA per coil is required which can be obtained by using a 12 V supply when the coils are connected in series or a 6 V supply when they are in parallel.

Connecting the coils

The coils have been connected to 8 soldering tags as shown in Fig. 2.

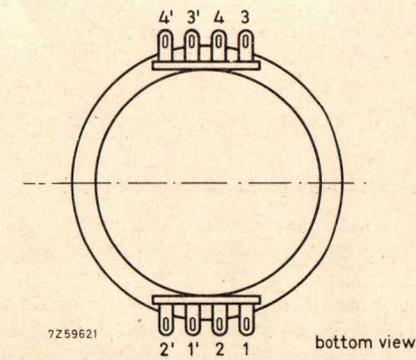


Fig. 2

With L<sub>3</sub> and L<sub>4</sub> connected in series as in Fig. 3 a current in the direction indicated will produce a clockwise rotation of the vertical trace and an anti-clockwise rotation of the horizontal trace.


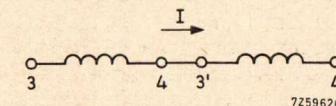


Fig. 3

## NOTES

- 1) These values are valid at cut-off of both viewing (flood) guns and the writing gun. The H.T. unit must be capable of supplying 0,5 mA. To protect the tube against excessive surge current during erasure, an adequately dimensioned RC-network must be connected in series with the screen terminal lead.



- 2) A graticule consisting of concentric rectangles of 88 mm x 70 mm and 84,8 mm x 67,6 mm is aligned with the electrical x-axis of the tube. With optimum corrections applied, a raster will fall between these rectangles.
- 3) The sensitivity at a deflection less than 75% of the useful scan will not differ by more than the indicated value from the sensitivity at the deflection of 25% of the useful scan.
- 4) The collimator electrode voltage should be adjusted for optimum uniformity of background illumination.
- 5) The voltage  $V_{g2'}$ ,  $V_{g2''}$  should be equal to the mean x-plate potential.
- 6) The writing speed is defined as the maximum speed at which a written trace is just visible, starting from a background which is just black. The indicated value is guaranteed for the central 80% of the minimum screen area. In addition, in any corner not more than 4 square divisions fall outside the guaranteed area.
- 7) The storage time is defined as the time required for the brightness of the unwritten background to rise from just zero brightness (viewing-beam cut-off) to 10% of saturated brightness. At reduced intensity (by pulsing the flood beams) the storage time can be increased.
- 8) This voltage should be equal to the mean y-plate potential. The mean x and y-plate potentials should be equal for optimum spot quality.

## CORRECTION COILS

## General

The L14-130GH/55 is provided with a coil unit consisting of (see Fig. 1):

1. A pair of coils  $L_3$  and  $L_4$  which enable the angle between the x and y traces at the centre of the screen to be made exactly  $90^\circ$  (orthogonality correction).
2. A pair of coils  $L_1$  and  $L_2$  for image rotation which enable the alignment of the x-trace with the x-lines of the graticule.

## CAPACITANCES

## Writing section

$x_1$ to all other elements except $x_2$	$C_{x1(x2)}$	9 pF
$x_2$ to all other elements except $x_1$	$C_{x2(x1)}$	9 pF
$y_1'$ to all other elements except $y_2'$	$C_{y1'(y2')}$	5 pF
$y_2'$ to all other elements except $y_1'$	$C_{y2'(y1')}$	6 pF
$y_1''$ to all other elements except $y_2''$	$C_{y1''(y2'')}$	6 pF
$y_2''$ to all other elements except $y_1''$	$C_{y2''(y1'')}$	5 pF
$x_1$ to $x_2$	$C_{x1x2}$	2,5 pF
$y_1'$ to $y_2'$	$C_{y1'y2'}$	0,6 pF
$y_1''$ to $y_2''$	$C_{y1''y2''}$	0,6 pF
$y_1'$ to $y_1''$	$C_{y1'y1''}$	4 fF
$y_2'$ to $y_2''$	$C_{y2'y2''}$	7 fF
$y_1'$ to $y_2''$	$C_{y1'y2''}$	0,1 fF
$y_2'$ to $y_1''$	$C_{y2'y1''}$	5 fF
$g_1$ to all other elements	$C_{g1}$	5 pF
$k$ to all other elements	$C_k$	5 pF

## Viewing section

$g_1'$ to all other elements	$C_{g1'}$	5 pF
$g_1''$ to all other elements	$C_{g1''}$	5 pF
$k'$ to all other elements	$C_{k'}$	5 pF
$k''$ to all other elements	$C_{k''}$	5 pF
$g_7$ to all other elements	$C_{g7}$	35 pF
$g_9$ to all other elements	$C_{g9}$	20 pF

1 fF = 1 femtofarad =  $10^{-15}$  farad

## TYPICAL OPERATION

## Conditions

## A. Writing section (voltages with respect to writing gun cathode k)

Final accelerator voltage	$V_{g10}(\ell)$	8500 V	1)
Geometry control electrode voltage	$V_{g6}$	1500 ± 100 V	
Deflection plate shield voltage	$V_{g5}$	1500 V	8)
Astigmatism control electrode voltage	$V_{g4}$	1500 ± 75 V	
Focusing electrode voltage	$V_{g3}$	350 to 650 V	
First accelerator voltage	$V_{g2}$	1500 V	
Control grid voltage for visual extinction of focused spot	$V_{g1}$	-40 to -80 V	

## B. Viewing section (voltages with respect to viewing gun cathodes k' and k'')

Final accelerator voltage	$V_{g10}(\ell)$	7050 V	1)
Backing electrode voltage, store mode	$V_{g9}$	1 V	
non-store mode	$V_{g9}$	-35 V	
Collector voltage	$V_{g8}$	150 V	
Collimator voltage	$V_{g7}$	30 to 120 V	4)
First accelerator voltage	$V_{g2}', g2''$	50 V	5)
Control grid voltage for cut-off	$V_{g1}', V_{g1}''$	-30 to -70 V	
Cathode current (each viewing gun)	$I_{k}', I_{k}''$	0,4 mA	

## Performance

Grid drive for 5 µA beam current, per system		≈	30 V	
Deflection coefficient, horizontal	$M_x$	<	9,5 V/div	
		<	10,5 V/div	
	vertical, system 1	$M_{y'}$	<	8,5 V/div
			<	9,5 V/div
vertical, system 2	$M_{y''}$	<	8,5 V/div	
		<	9,5 V/div	
Geometry distortion			see note 2	
Deviation of linearity of deflection		max.	2 % 3)	
Useful scan, horizontal		min.	90 mm	
	vertical	min.	72 mm	
Writing speed in store mode		greater than 100	div/ms 6)	
Storage time		greater than 1,5	min 7)	

Notes see page 8

## LIMITING VALUES (Absolute max. rating system)

## A. Writing section (voltages with respect to writing gun cathode k)

Final accelerator voltage	$V_{g10}(\ell)$	max.	9500 V
		min.	7000 V
Geometry control electrode voltage	$V_{g6}$	max.	2100 V
Deflection plate shield voltage	$V_{g5}$	max.	2000 V
Astigmatism control electrode voltage	$V_{g4}$	max.	2100 V
		min.	1200 V
Focusing electrode voltage	$V_{g3}$	max.	1000 V
First accelerator voltage	$V_{g2}$	max.	2000 V
		min.	1250 V
Control grid voltage, positive	$V_{g1}$	max.	0 V
		negative	$-V_{g1}$
Cathode to heater voltage, positive	$V_{kf}$	max.	125 V
		negative	$-V_{kf}$
Voltage between astigmatism control electrode and any deflection plate	$V_{g4/x}$ $V_{g4/y}$	max.	500 V
		max.	500 V
Grid drive average		max.	30 V

## B. Viewing section (voltages with respect to viewing gun cathodes k' and k'' unless otherwise specified)

Final accelerator voltage	$V_{g10}(\ell)$	max.	8000 V
		min.	5500 V
Backing electrode voltage, store mode	$V_{g6}$	max.	5 V
		min.	0 V
non-store mode	$-V_{g9}$	max.	50 V
		min.	25 V
Collector voltage	$V_{g8}$	max.	180 V
		min.	120 V
Collimator voltage	$V_{g7}$	max.	200 V
		min.	0 V
First accelerator voltage	$V_{g2}', V_{g2}''$	max.	60 V
		min.	40 V
Cathode-to-heater voltage, positive	$V_{k'f'}, V_{k''f''}$	max.	125 V
		negative	$-V_{k'f'}, -V_{k''f''}$
Control grid voltage, positive	$V_{g1}', V_{g1}''$	max.	0 V
		negative	$-V_{g1}', -V_{g1}''$