

# DEVELOPMENT SAMPLE DATA

This information is derived from development samples made available for evaluation. It does not form part of our data handbook system and does not necessarily imply that the device will go into production

L14-131GH/55

## INSTRUMENT CATHODE-RAY TUBE

14 cm-diagonal rectangular flat-faced direct-view storage tube with split-beam writing gun, variable persistence and internal graticule, intended for oscilloscope applications.

### QUICK REFERENCE DATA

Final accelerator voltage	$V_{g10}$ (ℓ)	8,5 kV
Useful scan (10 x 8 divisions of 9 mm)		90 x 72 mm
Deflection coefficient		
horizontal	$M_x$	9,5 V/div
vertical, system 1	$M_{y'}$	8,5 V/div
vertical, system 2	$M_{y''}$	8,5 V/div
Overlap of the systems		100 %
Writing speed		1,25 div/μs

### OPTICAL DATA

Screen		metal-backed phosphor
type		GH, colour green
persistence, non-store mode		medium short
persistence, store mode		variable
Useful screen dimensions	min.	90 x 72 mm
Useful scan		
horizontal	min.	90 mm
vertical (each system)	min.	72 mm
overlap		100 %
Spot eccentricity		
in horizontal direction	max.	6 mm
in vertical direction	max.	9 mm

The scanned raster can be aligned with the internal graticule by means of correction coils fitted around the tube by the manufacturer.

### HEATING

#### Writing section

Indirect by a.c. or d.c.; parallel supply

Heater voltage	$V_f$	6,3 V
Heater current	$I_f$	300 mA

#### Viewing section

Indirect by d.c.; parallel supply

Heater voltage	$V_{f'}$	6,3 V
Heater current	$I_{f'}$	300 mA
Heater voltage	$V_{f''}$	6,3 V
Heater current	$I_{f''}$	300 mA

blue binder, tab 4



PHILIPS

January 1979

1

**MECHANICAL DATA****Mounting position** any

The tube should not be supported by the base alone and under no circumstances should the socket be allowed to support the tube. The tags near the screen should not be subjected to mechanical stress.

**Net mass** approx. 1,1 kg**Base** 14 pin, all glass**Dimensions and connections**

See also outline drawing, pages 4 and 5

Overall length (socket included) max. 445 mm

Face dimensions max. 100 x 120 mm

**Accessories**

Socket (supplied with tube) type 55566

Side contact connector (16 required) type 55561

**FOCUSING** electrostatic**DEFLECTION** double electrostatic

x-plates symmetrical

y-plates symmetrical

If use is made of the full deflection capabilities of the tube, the deflection plates will block part of the electron beams, hence a low impedance deflection plate drive is desirable.

Angle between x and y traces, each beam 90°

Angle between x-trace and x-axis of the internal graticule 0°

Angle between corresponding y-traces at the centre of the screen max. 45'

**BEAM CENTRING MAGNET**

Inherent to the split-beam system a slight difference between the two beam currents can occur after splitting, resulting in different intensities of the two traces. In order to equalize the beam currents, a beam centring magnet should be mounted near the base of the gun and adjusted for the required field direction and field strength.

**OPERATING NOTES****Modes of operation***Store mode*

- a. Dynamic erasure (variable persistence).

Dynamic erasure can be achieved by applying erasing pulses of positive polarity to the backing electrode. The pulse amplitude required is approximately 9 V (< 15 V) and the persistence of a stored display can be controlled by varying the duty factor of these pulses.

- b. Static erasure.

If no dynamic erasing pulses are applied, the storage time is limited by the potential shift of the storage layer due to landing of positive ions. In order to erase a stored display, the backing electrode should first be connected to the collector electrode voltage and then returned to its original potential for about 100 ms; after that, an erasing pulse of positive polarity and a duration of not less than 300 ms should be applied. For the adjustment of the amplitude of this pulse see Procedure of adjustment.

*Non-store mode*

For non-store operation, it is sufficient to make the backing electrode about 35 V negative with respect to the viewing gun cathodes. The viewing guns should not be switched off in this mode of operation since slight variations in raster geometry and deflection sensitivity might otherwise be caused. Care should be taken, especially when switching from store mode to non-store mode, that excessive writing beam current is avoided, as otherwise the storage layer may be damaged.

**Procedure of adjustment**

- a. Adjust the cathode current of each viewing gun to 0,4 mA by means of its control grid voltage.  
b. Adjustment of the erasing pulse amplitude (static erasure)

The pulse amplitude should be just sufficient to suppress any background illumination at the centre of the display area (this adjustment should be done under low ambient light conditions). Data on storage time and maximum writing speed are based on erasure to "just black". A larger pulse amplitude (erasure to "blacker than black") yields a longer storage time at the expense of maximum writing speed. On the other hand, writing speed can be increased if some background illumination is tolerated. To erase to "just black" the amplitude of this pulse is approximately 9 V.

- c. Adjustment of the collimator voltage.

With dynamic erasing pulses applied and a persistence control setting that yields a convenient background illumination intensity, the collimator voltage is adjusted for optimum background uniformity. This voltage will be approximately 80 V with respect to the viewing gun cathode potential. If this voltage will be approximately 80 V with respect to the viewing gun cathode potential. If this voltage is too high or too low, there is a decrease of intensity at the four corners or at the centres of the vertical edges of the display area respectively.

**CAPACITANCES****Writing section**

x <sub>1</sub>	to all other elements except x <sub>2</sub>	C <sub>x1(x2)</sub>	6,5 pF
x <sub>2</sub>	to all other elements except x <sub>1</sub>	C <sub>x2(x1)</sub>	6,5 pF
y <sub>1</sub> '	to all other elements except y <sub>2</sub> '	C <sub>y1'(y2')</sub>	5 pF
y <sub>2</sub> '	to all other elements except y <sub>1</sub> '	C <sub>y2'(y1')</sub>	6 pF
y <sub>1</sub> ''	to all other elements except y <sub>2</sub> ''	C <sub>y1''(y2'')</sub>	6 pF
y <sub>2</sub> ''	to all other elements except y <sub>1</sub> ''	C <sub>y2''(y1'')</sub>	5 pF

x <sub>1</sub>	to x <sub>2</sub>	C <sub>x1 x2</sub>	2,5 pF
y <sub>1</sub> '	to y <sub>2</sub> '	C <sub>y1'y2'</sub>	0,6 pF
y <sub>1</sub> ''	to y <sub>2</sub> ''	C <sub>y1''y2''</sub>	0,6 pF
y <sub>1</sub> '	to y <sub>1</sub> ''	C <sub>y1'y1''</sub>	4 fF
y <sub>2</sub> '	to y <sub>2</sub> ''	C <sub>y2'y2''</sub>	5 fF
y <sub>1</sub> '	to y <sub>2</sub> ''	C <sub>y1'y2''</sub>	0,3 fF
y <sub>2</sub> '	to y <sub>1</sub> ''	C <sub>y2'y1''</sub>	8 fF
g <sub>1</sub>	to all other elements	C <sub>g1</sub>	5,5 pF
k	to all other elements	C <sub>k</sub>	4,5 pF

**Viewing section**

g <sub>1</sub> '	to all other elements	C <sub>g1'</sub>	5,5 pF
g <sub>1</sub> ''	to all other elements	C <sub>g1''</sub>	5,5 pF
k'	to all other elements	C <sub>k'</sub>	5 pF
k''	to all other elements	C <sub>k''</sub>	5 pF
g <sub>7</sub>	to all other elements	C <sub>g7</sub>	45 pF
g <sub>9</sub>	to all other elements	C <sub>g9</sub>	75 pF

DEVELOPMENT SAMPLE DATA

1 fF = 1 femto farad = 10<sup>-15</sup> farad.



DIMENSIONS AND CONNECTIONS

Dimensions in mm

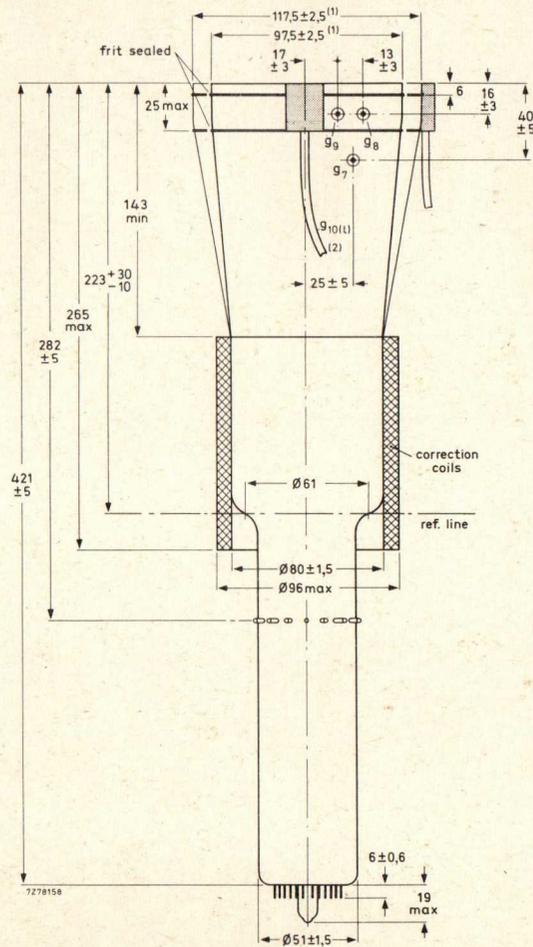


Fig. 1 Outlines.

- (1) The bulge at the frit seal may increase the indicated maximum dimensions by not more than 3 mm.
- (2) Minimum length of cable: 420 mm.

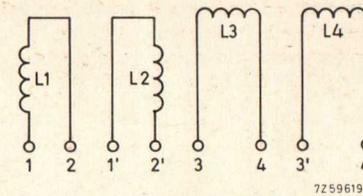


Fig. 9 Diagram of coil unit.

DEVELOPMENT SAMPLE DATA

**Orthogonality (coils L3 and L4)**

The current required under typical operating conditions without a mu-metal shield being used is max. 20 mA for complete correction of orthogonality. It will be 30% to 50% lower with shield, depending on the shield diameter. The resistance of the coil is approx. 225 Ω.

**Image rotation (coils L1 and L2)**

The image rotation coils are wound concentrically around the tube neck. Under typical operating conditions 22 ampere-turns are required for maximum rotation of 5°. Both coils have 850 turns. This means that a current of max. 12,5 mA per coil is required which can be obtained by using a 12 V supply when the coils are connected in series or a 6 V supply when they are in parallel.

**Connecting the coils**

The coils have been connected to 8 solder tags according to Fig. 10.

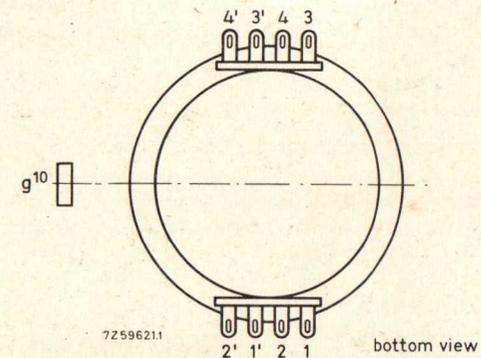


Fig. 10 Bottom view.

With L3 and L4 connected in series according to Fig. 11 a current in the direction indicated will produce a clockwise rotation of the vertical trace and an anti-clockwise rotation of the horizontal trace.




Fig. 11.



## TYPICAL OPERATION (for notes see page 8)

## Conditions

Writing section (voltages with respect to writing gun cathode k)

Final accelerator voltage	$V_{g10}(\ell)$	8500 V	note 1
Geometry control electrode voltage	$V_{g6}$	1500 ± 100 V	
Deflection plate shield voltage	$V_{g5}$	1500 V	note 2
Astigmatism control electrode voltage	$V_{g4}$	1500 ± 75 V	
Focusing electrode voltage	$V_{g3}$	400 to 650 V	
First accelerator voltage	$V_{g2}$	1500 V	
Control grid voltage for visual extinction of focused spot	$V_{g1}$	-40 to -80 V	

Viewing section (voltages with respect to viewing gun cathode k' and k'')

Final accelerator voltage	$V_{g10}(\ell)$	7050 V	note 1
Backing electrode voltage, storage operation	$V_{g9}$	1 V	
non-storage operation	$V_{g9}$	-35 V	
Collector voltage	$V_{g8}$	150 V	
Collimator voltage	$V_{g7}$	30 to 120 V	note 3
First accelerator voltage	$V_{g2'}, V_{g2''}$	50 V	note 4
Control grid voltage for cut-off	$V_{g1'}, V_{g1''}$	-30 to -70 V	
Cathode current (each viewing gun)	$I_{k'}, I_{k''}$	0,4 mA	

## Performance

Useful scan			
horizontal		min. 90 mm	
vertical		min. 72 mm	
Deflection coefficient			
horizontal	$M_x$	9,5 V/div	
		max. 10,5 V/div	
vertical, system 1	$M_{y'}$	8,5 V/div	
		max. 9,5 V/div	
vertical, system 2	$M_{y''}$	8,5 V/div	
		max. 9,5 V/div	
Line width at the centre of the screen	l.w.	0,40 mm	note 5
Writing speed in store mode		greater than 125 div/ms	note 6
Storage time		greater than 1,5 min	note 7
Deviation of linearity of deflection		max. 2 %	note 8
Geometry distortion		see note 9	
Grid drive for 5 $\mu$ A beam current, per system		approx. 30 V	

## LIMITING VALUES (Absolute maximum rating system)

Writing section (voltages with respect to writing gun cathode k)

Final accelerator voltage	$V_{g10}(\ell)$	max. 9500 V	
		min. 7000 V	
Geometry control electrode voltage	$V_{g6}$	max. 2100 V	
Deflection plate shield voltage	$V_{g5}$	max. 2000 V	
Astigmatism control electrode voltage	$V_{g4}$	max. 2100 V	
		min. 1200 V	
Focusing electrode voltage	$V_{g3}$	max. 1000 V	
First accelerator voltage	$V_{g2}$	max. 2000 V	
		min. 1250 V	
Control grid voltage			
positive	$V_{g1}$	max. 0 V	
negative	$-V_{g1}$	max. 200 V	
Cathode to heater voltage			
positive	$V_{kf}$	max. 125 V	
negative	$-V_{kf}$	max. 125 V	
Voltage between astigmatism control electrode and any deflection plate	$V_{g4/x}$ $V_{g4/y}$	max. 500 V	
		max. 500 V	
Average grid drive		max. 30 V	

Viewing section (voltages with respect to viewing gun cathodes k' and k'' unless otherwise specified)

Final accelerator voltage	$V_{g10}(\ell)$	max. 8000 V	
		min. 5500 V	
Backing electrode voltage, storage operation	$V_{g9}$	max. 5 V	
		min. 0 V	
non-storage operation	$-V_{g9}$	max. 50 V	
		min. 25 V	
Collector voltage	$V_{g8}$	max. 180 V	
		min. 120 V	
Collimator voltage	$V_{g7}$	max. 200 V	
		min. 0 V	
First accelerator voltage	$V_{g2'}, V_{g2''}$	max. 60 V	
		min. 40 V	
Cathode to heater voltage			
positive	$V_{k'f}, V_{k''f}$	max. 125 V	
negative	$-V_{k'f}, -V_{k''f}$	max. 125 V	
Control grid voltage			
positive	$V_{g1'}, V_{g1''}$	max. 0 V	
negative	$-V_{g1'}, -V_{g1''}$	max. 200 V	

DEVELOPMENT SAMPLE DATA

