



5AS4-A

5AS4-A

FULL-WAVE VACUUM RECTIFIER

GENERAL DATA

Electrical:

Filament, Coated:

Voltage	5	ac volts
Current	3	amp

Mechanical:

Mounting Position Vertical, base up or down, or
 Horizontal with pins 1 and 4 in vertical plane

Maximum Overall Length 4-1/4"

Maximum Seated Length 3-11/16"


Maximum Diameter 1-9/16"

Bulb T12

Base Short Medium-Shell Octal 8-Pin
 with External Barriers, Style B (JETEC No. B8-118),
 or Short Medium-Shell Octal 5-Pin
 with External Barriers, Style B (JETEC No. B5-121)


Basing Designation for BOTTOM VIEW 5T

- Pin 1 - No Connection
- Pin 2 - Filament
- Pin 3 - Same as Pin 1
- Pin 4 - Plate No. 2



- Pin 5 - Same as Pin 1
- Pin 6 - Plate No. 1
- Pin 7 - Same as Pin 1
- Pin 8 - Filament

MAXIMUM RATINGS, TYPICAL OPERATION, and CURVES
 for Type 5AS4-A are the same as those shown for Type 5U4-GB

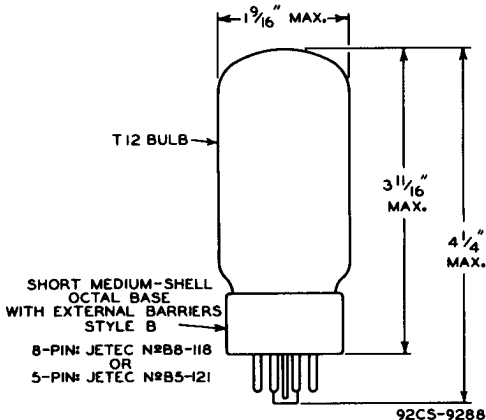

On the 5-pin base, pins 3, 5, and 7 are omitted.