


TUNG-SOL

DOUBLE TRIODE
MINIATURE TYPE



GLASS BULB


COATED UNIPOTENTIAL CATHODE

HEATER

6.3 VOLTS 0.45 AMP.

AC OR DC

ANY MOUNTING POSITION



BOTTOM VIEW

MINIATURE BUTTON
7 PIN BASE

78F

THE 6J6 AND 6J6A ARE TWIN TRIODES IN THE 7-PIN MINIATURE CONSTRUCTION. THEY MAY BE OPERATED IN PARALLEL OR PUSH-PULL. WITH THE GRIDS IN A PUSH-PULL ARRANGEMENT AND THE PLATES IN PARALLEL, THE TUBES ARE PARTICULARLY ADAPTABLE FOR SERVICE AS MIXERS AT FREQUENCIES AS HIGH AS 600 MEGACYCLES. THERMAL CHARACTERISTICS OF THE HEATER OF THE 6J6A ARE CONTROLLED SUCH THAT HEATER VOLTAGE SURGES DURING THE WARM-UP CYCLE ARE MINIMIZED PROVIDED IT IS USED WITH OTHER TYPES WHICH ARE SIMILARLY CONTROLLED. EXCEPT FOR THE CONTROLLED HEATER WARM-UP TIME OF THE 6J6A, THE TWO TUBES ARE IDENTICAL.

DIRECT INTERELECTRODE CAPACITANCES

	WITHOUT SHIELD	WITH SHIELD ^A	
GRID TO PLATE (EACH SECTION)	1.6	1.5	μμf
INPUT (EACH SECTION)	2.2	2.6	μμf
OUTPUT (SECTION 1)	0.4	1.6	μμf
OUTPUT (SECTION 2)	0.4	1.0	μμf

^AEXTERNAL SHIELD #316 CONNECTED TO PIN #7.

RATINGS

INTERPRETED ACCORDING TO DESIGN CENTER SYSTEM

EACH SECTION

	AF AMPLIFIER	RF AMPLIFIER	
HEATER VOLTAGE		6.3	VOLTS
MAXIMUM HEATER-CATHODE VOLTAGE	±100	±100	VOLTS
MAXIMUM PLATE VOLTAGE	300	300	VOLTS
MAXIMUM POSITIVE DC GRID VOLTAGE	0	0	VOLTS
MAXIMUM NEGATIVE DC GRID VOLTAGE	---	-40	VOLTS
MAXIMUM PLATE INPUT	---	4.5	WATTS
MAXIMUM PLATE DISSIPATION	1.5	1.5	WATTS
MAXIMUM PLATE CURRENT	---	15	MA.
MAXIMUM GRID CURRENT	---	8	MA.
MAXIMUM GRID CIRCUIT RESISTANCE (CATHODE BIAS)	0.5	---	MEG OHMS
HEATER WARM-UP TIME (APPROX.)* (6J6A ONLY)		11.0	SECONDS

*HEATER-WARM-UP TIME IS DEFINED AS THE TIME REQUIRED FOR THE VOLTAGE ACROSS THE HEATER TO REACH 80% OF ITS RATED VOLTAGE AFTER APPLYING 4 TIMES RATED HEATER VOLTAGE TO A CIRCUIT CONSISTING OF THE TUBE HEATER IN SERIES WITH A RESISTANCE OF VALUE 3 TIMES THE NOMINAL HEATER OPERATING RESISTANCE.

CONTINUED ON FOLLOWING PAGE

PRINTED IN U. S. A.

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A₁ AMPLIFIER - EACH SECTION

HEATER VOLTAGE	6.3	VOLTS
HEATER CURRENT	0.45	AMP.
PLATE VOLTAGE	100	VOLTS
CATHODE BIAS RESISTOR (BOTH SECTIONS) ^B	50	OHMS
AMPLIFICATION FACTOR	38	
PLATE RESISTANCE	7 100	OHMS
TRANSCONDUCTANCE	5 300	μMHOS
PLATE CURRENT	8.5	MA.



^B OPERATION WITH FIXED BIAS IS NOT RECOMMENDED.

CLASS C TELEGRAPHY - RF POWER AMPLIFIER AND OSCILLATOR

BOTH SECTIONS IN PUSH PULL

HEATER VOLTAGE	6.3	VOLTS
HEATER CURRENT	0.45	AMP.
DC PLATE VOLTAGE	150	VOLTS
DC GRID VOLTAGE ^C	-10	VOLTS
DC PLATE CURRENT	30	MA.
DC GRID CURRENT (APPROX.)	16	MA.
DRIVING POWER (APPROX.)	0.35	WATT
POWER OUTPUT (APPROX.)	3.5	WATTS

^C OBTAINED BY A 525-OHMS GRID RESISTOR, A 220-OHMS CATHODE RESISTOR, OR A FIXED VOLTAGE SUPPLY.

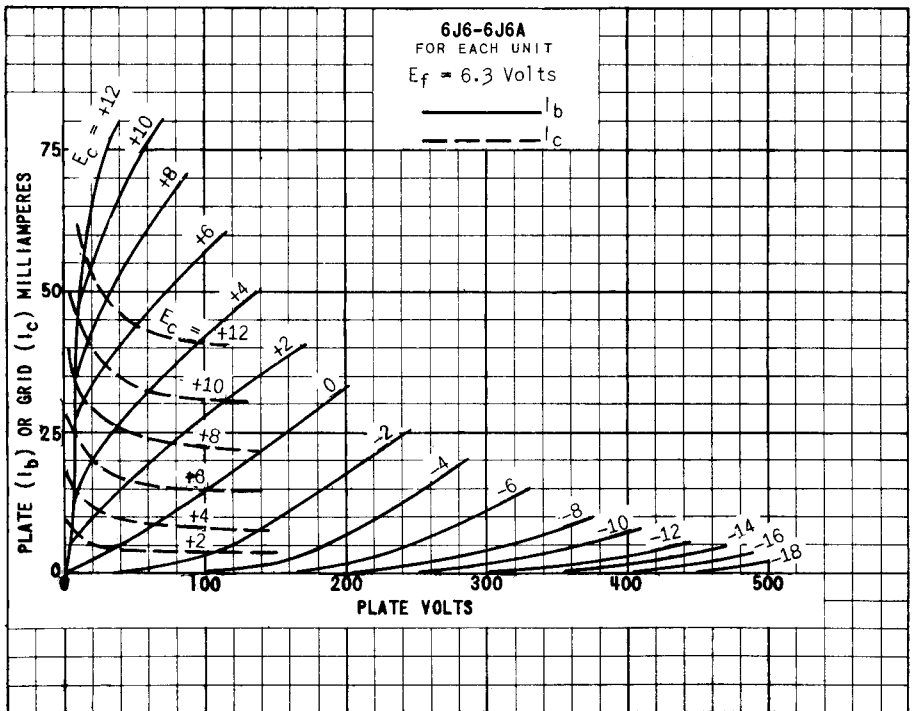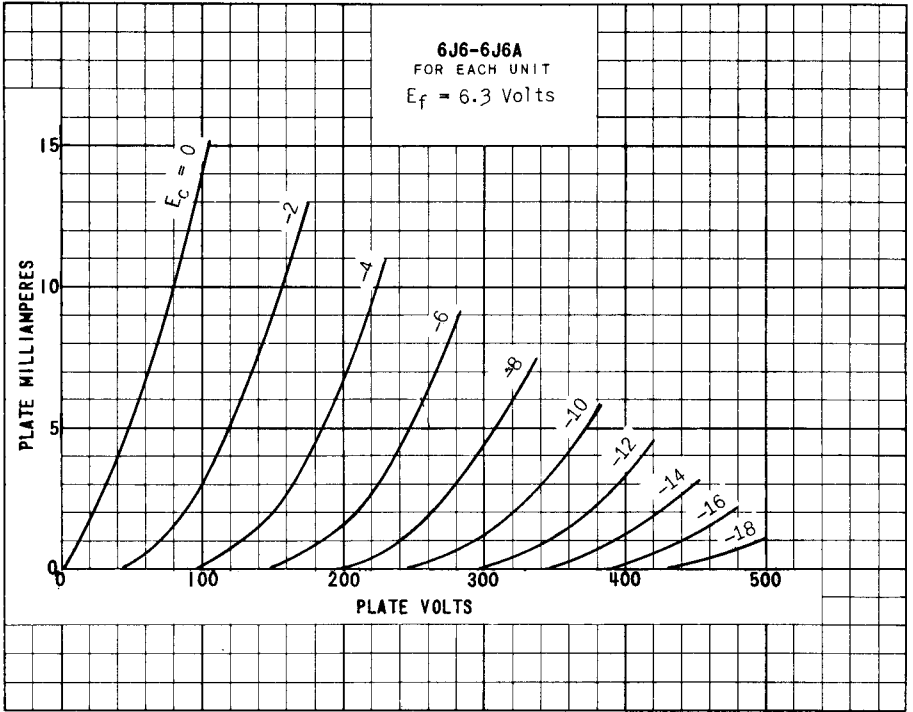

PRINTED IN U. S. A.