

Mullard

MEDIUM IMPEDANCE TRIODE

DA3


PERVATIVE DATA

Filament		$V_f = 2.0 \text{ V}$
		$I_f = 0.055 \text{ A}$
Operating Conditions		
V_a 20	40 V
I_a 0.5	1.8 mA
$-V_{g1}$ 1.0	2.8 V
g 4.7	4.7
S 0.35	0.62 mA/V
R_i 13,500	7,600 Ω

Limiting Values

$V_a \text{ max}$	100 V
$R_{g1} \text{ max}$	1.0 M Ω

Arrangement of electrodes and base connections

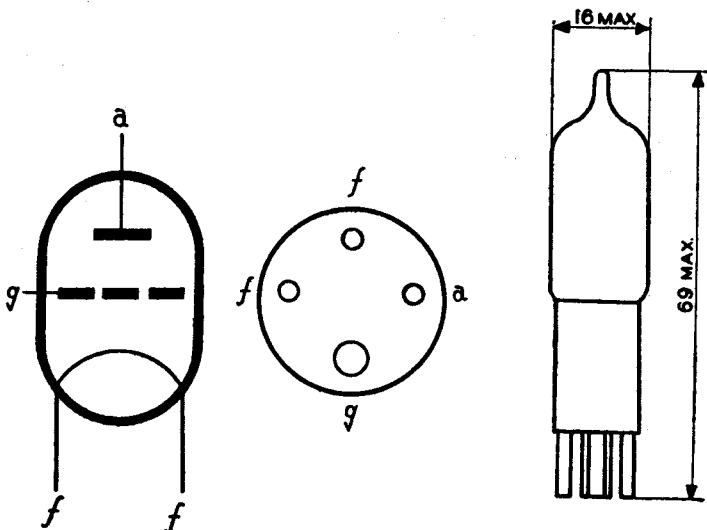

DA3

DA3

Mullard MEDIUM IMPEDANCE TRIODE

