

MEDIUM-MU TWIN TRIODE 7730

CBS Type 7730 is a miniature medium-mu twin triode which is especially designed and tested for use in measurement test equipment, instrumentation, and other applications where extreme reliability, stable characteristics, and long life are required. The 7730 is a replacement for type 12AU7 and superior performance is assured because of its improved construction, special tests, and tight minimum-maximum limits.

This electron tube has a continuous-wound coil heater which is superior to ordinary heaters both electrically and mechanically. Burn-outs are virtually eliminated, heater-cathode leakage is lower, and hum is lower. Further insurance of quality is provided by heater cycle testing.

Stable characteristics throughout life and resistance against the formation of interface impedance are a result of meticulous processing and selection of cathode sleeve material. Also each tube is subjected to a 48 hour burn-in period to obtain a more uniform level of performance when they are put into operational service.

An elaborate testing procedure is carried out on these tubes for confidence in their ultimate operation. There is a 100-hour early life assurance test, a special 1000-hour life test, and a 5000-hour informational life test.


Additional mechanical features offered by CBS type 7730 include: gold plated base pins which prevent oxidation and improve base pin contact; precisely made and fitted parts in stronger structures for lower noise and microphonism; and electrical features include: initial plate current balance, life tested plate current balance, grid current test, and reverse grid current test.

MECHANICAL DATA

Cathode, coated unipotential	
Bulb	T-6 1/2
Outline	JEDEC 6-2
Base	Miniature 9-pin (E9-1)
Basing	9A
Mounting position	Any

PIN CONNECTIONS

- Pin 1: Plate (Section 2)
- Pin 2: Grid (Section 2)
- Pin 3: Cathode (Section 2)
- Pin 4: Heater
- Pin 5: Heater
- Pin 6: Plate (Section 1)
- Pin 7: Grid (Section 1)
- Pin 8: Cathode (Section 1)
- Pin 9: Heater Center-Tap



ELECTRICAL DATA

HEATER CHARACTERISTICS

	Series	Parallel	
Voltage, a-c or d-c	12.6 \pm 10%	6.3 \pm 10%	volts
Current	150	300	ma
Peak heater-cathode voltage, max.			
Heater negative to cathode	200	200	volts
Heater positive to cathode*	200	200	volts

*D-c component must not exceed 100 volts

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield *	
Grid to plate: g1 to p	1.5	1.5	uuf
Input: g1 to k+h	1.6	1.8	uuf
Output: p to k+h			
Section 1	0.40	2.0	uuf
Section 2	0.32	2.0	uuf

*JETEC shield 315 connected to cathode.

MAXIMUM RATINGS (Design maximum values)

Each Section


Plate voltage	330	volts
Plate dissipation (each plate)	3.0	watts
Cathode current	20	ma
Bulb temperature	165	°C

CHARACTERISTICS AND TYPICAL OPERATION


Class A Amplifier - Each Section

Plate voltage	100	250	volts
Control grid voltage	0	-8.5	volts
Plate resistance (approx.)	6500	7700	ohms
Transconductance	3100	2200	umhos
Amplification factor	20	17	
Plate current	11.8	10.5	ma
Grid 1 voltage (approx.) for $I_b = 10 \text{ ua}$		-24	volts

AVERAGE PLATE CHARACTERISTICS

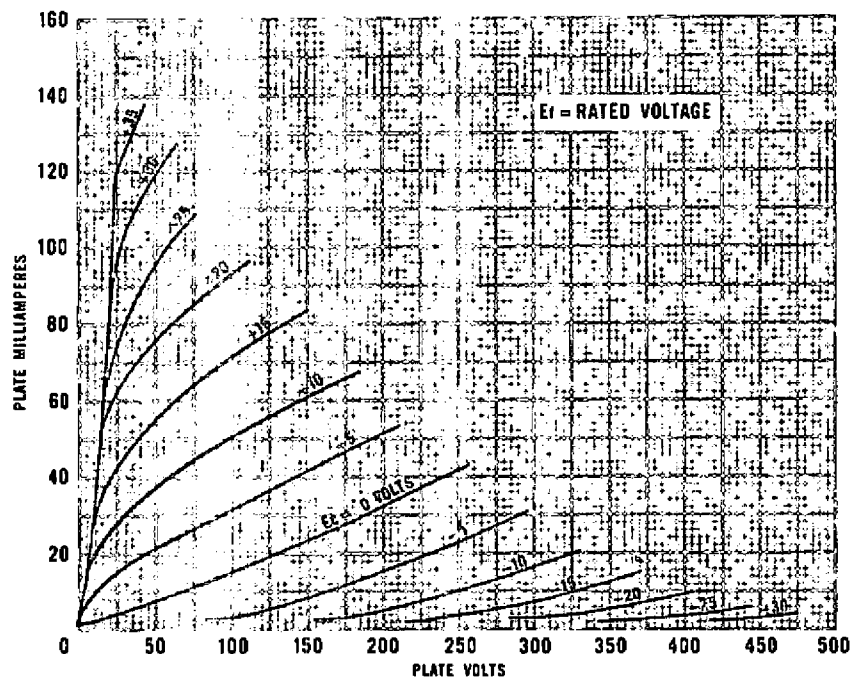

AVERAGE PLATE CHARACTERISTICS

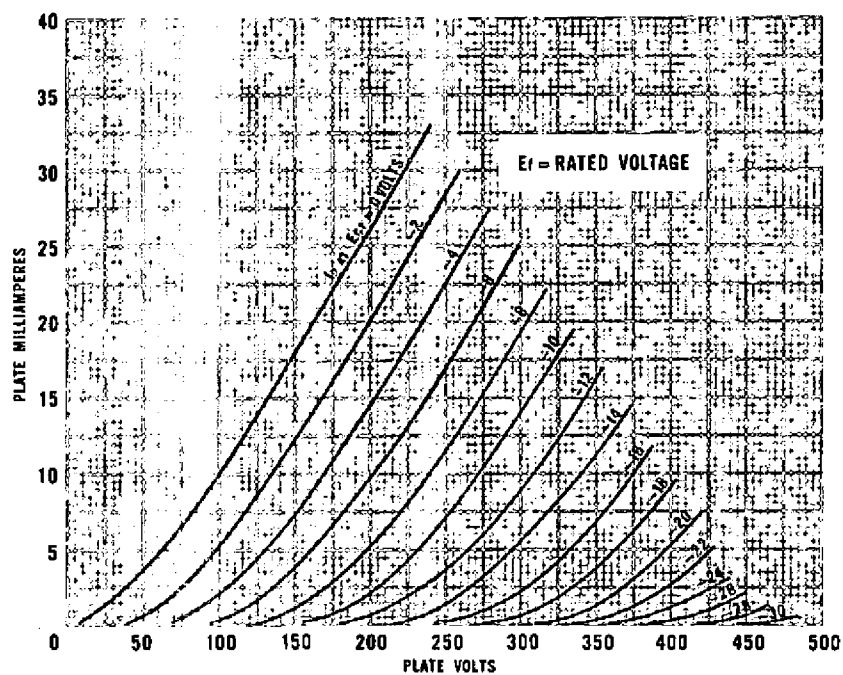



CUSTOMER ACCEPTANCE SPECIFICATION

Test Conditions

12. 6 series connection or 6. 3 parallel connection
 $E_b = 120 \text{ Vdc}$
 $E_c = 0 \text{ Vdc}$

<u>Reference</u>	<u>AQL</u>	<u>Test</u>	<u>Conditions</u>	<u>Sym.</u>	<u>Min.</u>	<u>Max.</u>	<u>Unit</u>
Note 2	Note 1						
4. 7. 5	0. 4	Continuity & Short		---	---	---	---
4. 10. 8	2. 5*	Heater Current	$E_f = 6, 3$ $E_f = 12. 6$	I_f I_f	275 138	325 162	mA
4. 10. 15	1. 0	Heater Cathode Leakage	$E_{hk} = +200 \text{ Vdc}$ $E_{hk} = -200 \text{ Vdc}$	I_{hk} I_{hk}	0 0	5. 0 5. 0	μAdc μAdc
4. 10. 6. 1	1. 0	Grid Current (1)	$E_{bb} = 250 \text{ Vdc}$ $E_{cc} = -9 \text{ Vdc}$, $R_g/g=0. 5 \text{ meg}$ $R_p=2\text{K}$, Note 4	$I_c(1)$	---	-. 5	μAdc
---	2. 5	Grid Block (2)	$E_{bb} = 67. 5 \text{ Vdc}$ $E_c=0$; Notes 3, 6	$E_1 C_1$	0	-1. 5	Vdc
4. 10. 4. 1	2. 5	Plate Current (1)	$E_{cc} = -15 \text{ Vdc}$ $R_p=2\text{K}$; Note 3	$I_b(1)$	---	50	μAdc
4. 10. 4. 1	1. 0	Plate Current (2)	$R_p = 2\text{K}$; Note 3	$I_b(2)$	8	16	mAdc
4. 10. 4. 1	1. 0	Plate Current Differential	$E_{bb}=250\text{Vdc}$, $E_{cc}= -9. 0\text{Vdc}$ $R_g/g=0. 5 \text{ meg}$, $R_p=2\text{K}$ Notes 3, 7, 13	$\Delta I_b(3)$	---	15	%
4. 10. 9	2. 5	Transconductance(1)	$E_{bb}=100\text{Vdc}$; Note 3	$S_m(1)$	3000	4200	μmhos
4. 10. 9	2. 5	Transconductance(2)	$E_f=90\%$ of E_f used in $S_m(1)$ test, $E_b= 100\text{Vdc}$; Note 3	ΔS_m	---	15	%
---	---	Cathode Current	$E_b=22\text{V}$, $R_g-p=300\text{K}$; Note 3	I_k	1. 2	---	mA
---	1. 0	Pulse Emission	$E_b=200$, $E_c= -30$, $e_{gk}= +50\text{V}$ Notes 5, 3	I_{sp}	175	---	mAdc
4. 10. 3. 4	2. 5	Noise & Microphonics	$E_{bb}=275\text{Vdc}$; $E_c=0$, $R_k=1500 \text{ ohms}$ $C_k=1000 \text{ uuf}$, $R_p=50000 \text{ ohms}$ $R_g=50000 \text{ ohms}$, $E_{cal}=50\text{mVac}$ Notes 4, 14	M	---	---	---
---	2. 5	Contact Potential	$E_{bb}=120\text{Vdc}$, $E_{c_1}=0$, $R_g/g=2. 2 \text{ meg}$ Notes 12, 3	E_{cp}	0	-1. 0	Vdc
4. 8	2. 5	Insulation of Electrodes	$E(g_1 - \text{all})=100\text{Vdc}$, g_1 Negative $E(p-\text{all})=300\text{Vdc}$, p Negative Note 3	$R(g-\text{all})$ $R(p-\text{all})$	1000 1000	---	meg meg
4. 10. 14	2. 5*	Capacitances	Without Shield, Note 3	C_{gp} C_{in} $C_{out 1}$ $C_{out 2}$ C_{lg-2g}	1. 2 1. 2 0. 35 0. 24	1. 8 2. 0 0. 65 0. 46	μuf μuf μuf μuf μuf

<u>Reference</u>	<u>AQL</u>	<u>Test</u>	<u>Conditions</u>	<u>Sym.</u>	<u>Min.</u>	<u>Max.</u>	<u>Unit</u>
LIFE TESTS							
---	1.0	Early Life Assurance Test Code K	Ef=12.6V or 6.3V Eb=250Vdc Ecc= -9Vdc, Rg/g=47ohms Note 8	---	---	---	---
---	---	Early Life Assurance Test End Points	Shorts and Continuity	---	---	---	---
			Change in Plate Current (2) of Individual tubes	$\Delta \frac{I_b}{t}$	---	20	%
			Plate Current (3) Differential Note 13	$\Delta I_b(3)$	---	20	%
4.11.5	---	Intermittent Life Test (1) 1000 Hours	Early Life Assurance Test Conditions, Note 9	---	---	---	---
4.11.4	---	Intermittent Life Test (1) End Points 1000 Hours	Inoperatives Grid Current (1)	---	---	---	---
			Change in Plate Current (2) of Individual Tubes	$\Delta \frac{I_b}{t}$	---	20	%
			Plate Current (3) Differential Note 13	$\Delta I_b(3)$	---	25	%
			Heater Cathode Leakage Ehk= +200Vdc Ehk= -200Vdc	Ihk Ihk	---	20 20	μ Adc μ Adc
			Insulation of Electrodes E(g-all) E(p-all)	Rg-all Rp-all	1000	---	meg meg
4.11.5	---	Intermittent Life Test(2) 1000 hours	Ef=12.6V or 6.3V Eb = 250 Vdc Ecc= -50Vdc, Rg/g=47000 ohms Note 10	---	---	---	---
4.11.4	---	Intermittent Life Test (2) End Points 1000 Hours	Interface Resistance	Ri	---	100	ohms
4.11.7	---	Heater Cycling Life Test	Ef=13.8V or 7.0V Ehk= -200V;Cycle 1.0 min. on 4.0 min. off	---	---	48	hours
4.11.4	---	Heater Cycling Life Test End Points	Shorts and Continuity Heater Cathode Leakage Ehk= +200Vdc Ehk= -200Vdc	---	---	---	---
				Ihk Ihk	---	15 15	μ Adc μ Adc

TEST NOTES

Note 1: Lots of CBS Electronics tubes may be sampled using MIL-STD-105A sampling tables for the specified AQL. All characteristics having similar AQL's shall be combined for sampling purposes with the exception of control test. Control tests are indicated by an asterisk (*). The term AQL, as used on the specification, is defined in MIL-STD-105A, paragraph 4.1.


Note 2: References are paragraphs in MIL-E-1D specification, dated 31 March 1958.

Note 3: Unless otherwise specified herein, the following test conditions shall apply: Each unit will be tested separately. A unit not under test shall be grounded.

Note 4: Connect both sections in parallel.

Note 5: Use a pulse of one microsecond duration at a 1% duty cycle. Read with scope across a 1.0 cathode resistor.

Note 6: The grid current test shall be performed using circuit shown below or equivalent.

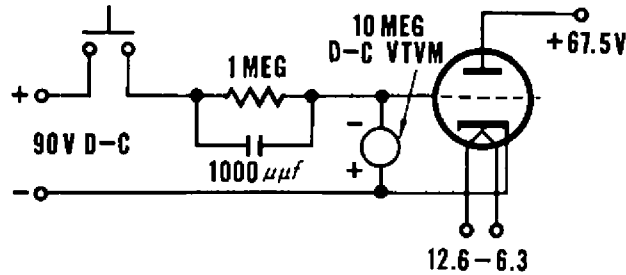

Apply 90 Vdc to grid momentarily. Upon removal of voltage VTVM shall not go positive nor shall it go more negative than -1.5 volts.

Note 7: Each tube shall not have greater than 15% unbalance between sections and at end of life shall not be out of balance by 25%

Note 8: Early Life Assurance Test

- a. Life test samples shall be selected from a lot at random in such a manner as to be representative of the lot. If such selection results in a sample containing tubes which are outside the initial specification limits for the relevant life test endpoint characteristics, such tubes shall be replaced by randomly selected acceptable tubes.
- b. Serially mark all tubes of the sample.
- c. Record reference characteristic measurements on the entire sample after a maximum operation of 15 minutes under specified voltage and current conditions.
- d. The Early Life Assurance Test sample shall be operated at specified conditions or equivalent for 100 hours (± 4 hours) with the intermediate down period reading point at 20 hours (± 4 hours) and 2 hours (± 30 minutes). Intermittent or continuous operation may be employed.
- e. A defective shall be defined as a tube having failed the shorts and continuity test or a tube having a change in referenced characteristic greater than that specified.

Note 9: 1000 Hour Intermittent Life Test

- a. The sample size shall be 10 tubes and shall be selected from the first 10 lowest number tubes which have successfully passed the Early Life Assurance Test and meet the initial test end point characteristic.
- b. Record the reference characteristic.
- c. Place the sample on life test with the specified operating conditions for 1000 hours with the intermediate down period reading points at 250 ± 24 hours, 500 ± 24 hours and 750 ± 24 hours. The 100 hours of Early Life Assurance Test shall be part of the 1000 hours.
- d. Acceptance criteria - The sample is acceptable if it has earned a total of 9000 tube hours. The total number of tube hours is the sum of the successful operating hours of each tube.
- e. Quarterly, the life test sample shall be continued to 5000 hours with interim reading points at each 1000 hours. This test will be run to determine long life capabilities.

Note 10: Intermittent Life Test (2)

- a. Life test samples shall be selected from a lot at random in such a manner as to be representative of the lot. If such selection results in a sample containing tubes which are outside the initial specification limits for the relevant life test end point characteristics, such tubes shall be replaced by randomly selected acceptable tubes.
- b. Sample size shall be 10 tubes.
- c. Record the reference characteristics.
- d. Place the sample on life test with the specified operating conditions for 1000 hours with the intermediate down period reading points at 250 ± 24 hours, 500 ± 24 hours and 750 ± 24 hours.
- e. Acceptance criteria - The sample is acceptable if it has earned a total of 9000 tube hours. The total number of tube hours is the sum of the successful operating hours of each tube.

Note 11: RI (Interface Resistance) shall be measured using the equivalent diode resistance 2 frequency method.

Note 12: Use 10 meg input resistance DC VTVM. Read voltage developed across Rg.

Note 13: Difference in plate current between sections.

Note 14: The rejection level shall be set at the VU meter reading obtained during calibration.



More reliable products through Advanced-Engineering

CBS ELECTRONICS, Receiving tube Operations, Danvers, Mass. A Division of Columbia Broadcasting System, Inc.

Sales Offices: Danvers, Mass., 100 Endicott Street, SPring 4-2360 • Newark, N. J., 231 Johnson Ave., TAibert 4-2450
Melrose Park, Ill., 1990 N. Mannheim Road, ESTebrook 9-2100 • Atlanta, Georgia, Cary Chapman and Co., 672 Whitehall St., SW., JAcKson 4-7388
Minneapolis, Minn., The Heimann Co., 1711 Hawthorne Avenue, FEderal 2-5457 • Los Angeles, Calif., 2120 S. Garfield Avenue, RAymond 3-9081

Printed in U.S.A.