


Equivalents 203 H

HF 125	Amp
303 U	amer

T.	Logo	Logo	U _f	I _f	Cl.	U _a	U _g	I _a	I _g	S	μ	P _{dr}	R _{aj/a}	P _o	P _a
			V	A		V	V	mA	mA	mA/V	V/V	W	kΩ	W	W
ESW205	Maz	1	10	6	stat.	2000		50		5	70				100
								maximum							
								18						170	
								21						105	
HF 100	Amp	2	10	2,5		1500		75	1,5					42	
								(20 ÷ 135) × 2						350	
								maximum							
								25						135	
								50						100	
203 A	amer	3	10	3,25		1250		106	3					42,5	
								(13 ÷ 160) × 2						260	
								maximum							
								20						173	
								150						145	
								152						47,5	
								97						267	
								45							
								45							
203 H	amer	3	10	3,25		1500		45							
								(40 ÷ 140) × 2							
								maximum							
								20						173	
								150						145	
								152						47,5	
								97						267	
								45							
								45							

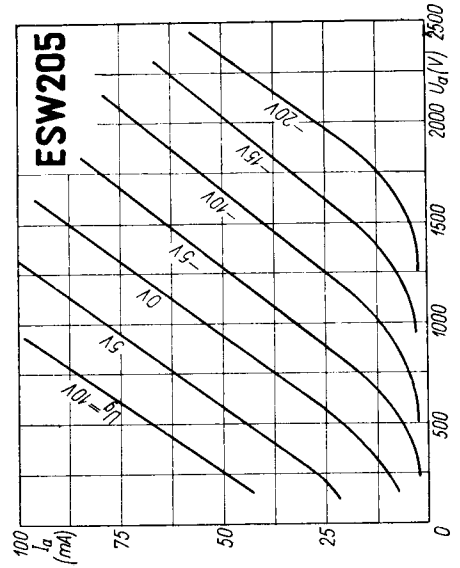

T.	C _g		C _a		C _{g/a}	
	PF	PF	PF	PF	PF	PF
ESW 205	8	3,65	11,6			
HF 100	4	2,6	4,5			
203 A	6,5	5,5	14,5			
203 H	6,5	1,5	11,5			

