

AIR COOLED V.H.F. POWER TETRODE

Forced air cooled coaxial power tetrode in metal-ceramic construction primarily intended for use as a linear broad-band amplifier in T V transmitters in the bands I and III. This type is also very suitable for A.M. and F.M. broadcast and A.F. modulator applications, and in T V transposer service.

QUICK REFERENCE DATA			
Class AB linear amplifier (vision)			
Frequency	f	175, 25	MHz
Anode voltage	V_a	8	kV
Output power in load	W_l	27, 5	kW
Power gain	G	28, 5	
Class C telegraphy or F.M. telephony			
Frequency	f	260	MHz
Anode voltage	V_a	8, 5	kV
Output power in load	W_l	25	kW
Power gain	G	31	
Television transposer service			
Frequency	f	175 to 225	MHz
Anode voltage	V_a	8	kV
Output power in load	W	10, 5	kW
Power gain	G	42	

HEATING : direct; filament thoriated tungsten, mesh type.

Filament voltage	V_f	11, 5	V \pm 5 %
Filament current	I_f	120	A
Filament peak starting current	I_{fp} max.	750	A
Cold filament resistance	R_{f0}	10, 5	m Ω
Waiting time	T_w min.	1	s

TYPICAL CHARACTERISTICS

Anode voltage	V_a	8	kV
Grid no. 2 voltage	V_{g_2}	700	V
Anode current	I_a	2,4	A
Transconductance	S	60	mA/V
Amplification factor	μ	8,5	

CAPACITANCES

	grounded cathode		grounded grid	
Input	$C_{g_1(a)}$	135	$C_{f(a)}$	69 pF
Output	$C_{a(g_1)}$	23	$C_{a(f)}$	23 pF
Anode to grid no. 1	C_{ag_1}	0,85		pF
Anode to filament			C_{af}	0,25 pF

TEMPERATURE LIMITS

Absolute max. envelope temperature	t_{env}	max.	240	$^{\circ}C$
Recommended max. seal temperature	t	max.	200	$^{\circ}C$

COOLING

See cooling curves.

Direction of airflow: see outline drawing.

→ ACCESSORIES


Band I amplifier circuit assembly (vision)	type	40759
Band I amplifier circuit assembly (sound)	type	40760
Band III amplifier circuit assembly (vision)	type	40768
Band III amplifier circuit assembly (sound)	type	40769

MECHANICAL DATA

Dimensions in mm

Net weight : approx. 11 kg

Mounting position : vertical with anode up or down

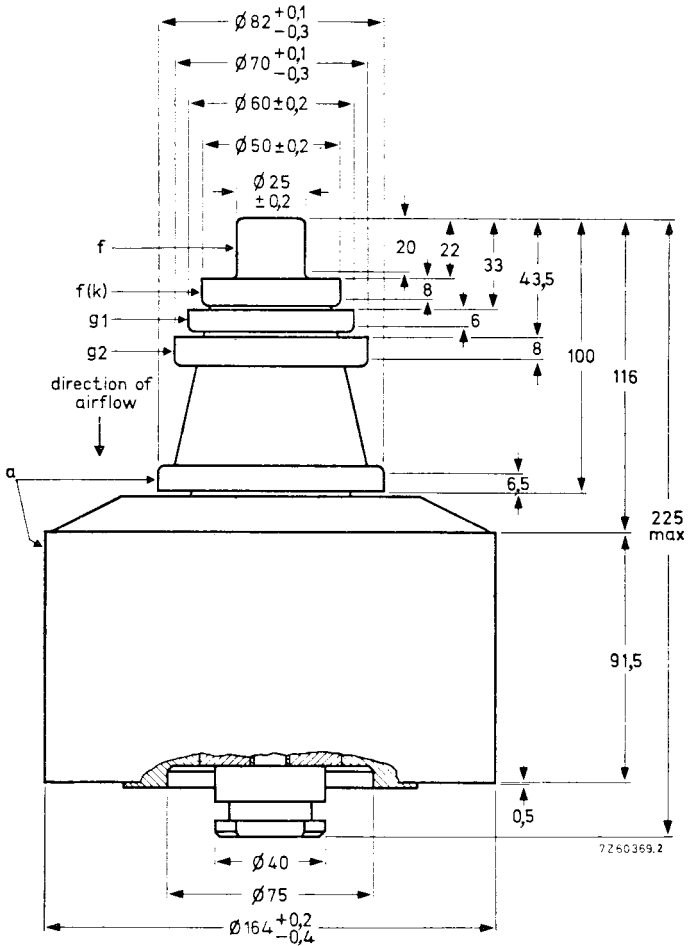

R.F. CLASS AB AMPLIFIER FOR TELEVISION TRANSPOSER SERVICE , grounded grid

LIMITING VALUES

See page 4

OPERATING CONDITIONS , grounded gridNegative modulation, positive synchronization, combined sound and vision
(CCIR standard G)

Frequency	f	175 to 225	MHz
Bandwidth (-1 dB)	B	8	MHz
Anode voltage	V_a	8	kV
Grid no. 2 voltage	V_{g2}	900	V
Grid no. 1 voltage	1) V_{g1}	-95	V
Anode current, no signal condition	I_a	1, 8	A
Anode current	6) I_a	3, 3	A
Grid no. 2 current	6) I_{g2}	35	mA
Grid no. 1 current	6) I_{g1}	20	mA
Driving power, sync	W_{dr}	250	W
Output power in load, sync	W_l	10, 5	kW
Power gain	G	42	-
Intermodulation products	7) d	-55	dB

Notes : See page 5.

R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY




LIMITING VALUES (Absolute max. rating system)


Frequency	f	up to	260 MHz
Anode voltage	V_a	max.	9,5 kV
Grid no. 2 voltage	V_{g2}	max.	1 kV
Grid no. 1 voltage	$-V_{g1}$	max.	500 V
Anode current	I_a	max.	7 A
Anode input power	W_{ia}	max.	42 kW
Anode dissipation	W_a	max.	18 kW
Grid no. 2 dissipation	W_{g2}	max.	100 W
Grid no. 1 dissipation	W_{g1}	max.	50 W
Cathode current	I_k	max.	9 A

OPERATING CONDITIONS

Frequency	f	260 MHz
Anode voltage	V_a	8,5 kV
Grid no. 2 voltage	V_{g2}	700 V
Grid no. 1 voltage	V_{g1}	-106 V ¹⁾
Anode current, no signal condition	I_a	300 mA
Anode current	I_a	4,6 A
Grid no. 2 current	I_{g2}	100 mA
Grid no. 1 current	I_{g1}	325 mA
Anode input power	W_{ia}	39,1 kW
Anode dissipation	W_a	14 kW
Output power in load	W_ℓ	25 kW
Efficiency, total		64 %
Driving power	W_{dr}	800 W
Power gain	$\frac{W_\ell}{W_{dr}}$	31

Note : See page 5

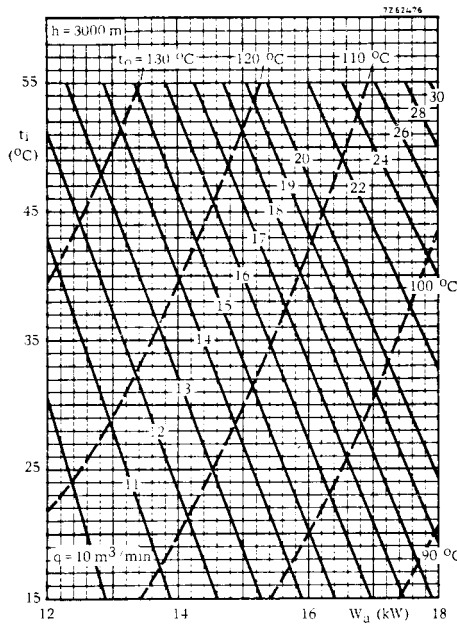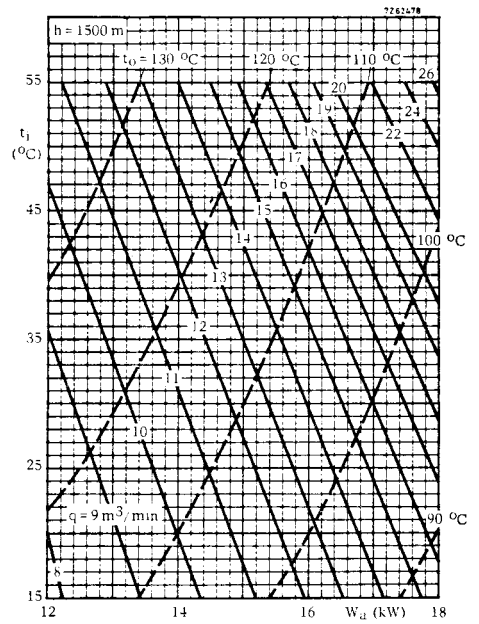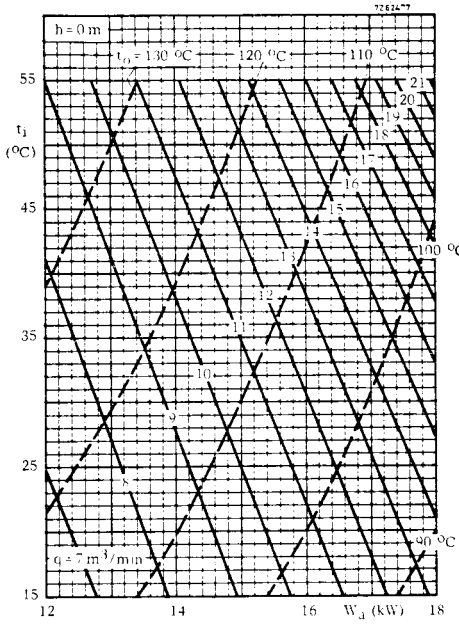

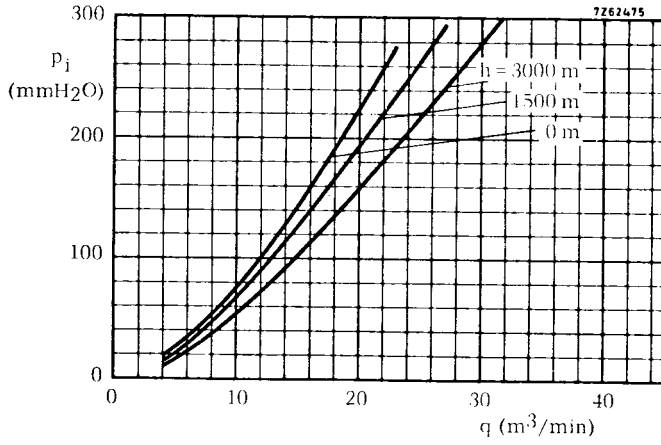

7Z62099

