



## TUNG-SOL

## TRIODE-PENTODE

## MINIATURE TYPE

OUTLINE DRAWING  
JEDEC G-2BASING DIAGRAM  
JEDEC 9FA

BOTTOM VIEW

FOR  
APPLICATIONS IN  
FM OR TV RECEIVERS

COATED UNIPOTENTIAL CATHODE  
ANY MOUNTING POSITION

SMALL BUTTON BASE  
9 PIN JEDEC E9-1

THE 6JN8 IS A SHARP-CUTOFF PENTODE AND MEDIUM-MU TRIODE IN THE 9 PIN MINIATURE CONSTRUCTION. THE PENTODE SECTION IS INTENDED FOR OSCILLATOR SERVICE IN THE HORIZONTAL DEFLECTION SYSTEM OF TELEVISION RECEIVERS, EXCEPT FOR HEATER CHARACTERISTICS AND RATINGS, THE 6JN8 IS IDENTICAL TO THE 19JN8.

**DIRECT INTERELECTRODE CAPACITANCES**  
WITH EXTERNAL SHIELD #315 CONNECTED TO CATHODE

## PENTODE SECTION:

GRID 1 TO PLATE: (G <sub>1</sub> TO P)	MAX.	0.01	pf
INPUT: G <sub>1</sub> TO (H + K + G <sub>2</sub> + G <sub>3</sub> + I.S.)		5.5	pf
OUTPUT: P TO (H + K + G <sub>2</sub> + G <sub>3</sub> + I.S.)		3.4	pf

## TRIODE SECTION:

GRID TO PLATE: (G TO P)		1.7	pf
INPUT: G TO (H + TK + PK + PG <sub>3</sub> + I.S.)		3.2	pf
OUTPUT: P TO (H + TK + PK + PG <sub>3</sub> + I.S.)		2.2	pf

**HEATER CHARACTERISTICS AND RATINGS**

DESIGN MAXIMUM VALUES - SEE EIA STANDARD RS-279

AVERAGE CHARACTERISTICS	6.3 VOLTS	450	mA
AVERAGE HEATER WARM-UP		11	SECONDS
LIMITS OF APPLIED VOLTAGE		6.3 ± 0.6	VOLTS
LIMITS OF SUPPLIED CURRENT		450 ± 30	mA

## HEATER-CATHODE VOLTAGE: EACH SECTION:

HEATER POSITIVE WITH RESPECT TO CATHODE			
DC COMPONENT		100	VOLTS
TOTAL DC AND PEAK		200	VOLTS
HEATER NEGATIVE WITH RESPECT TO CATHODE			
TOTAL DC AND PEAK		200	VOLTS

CONTINUED ON FOLLOWING PAGE

## TUNG-SOL

CONTINUED FROM PRECEDING PAGE


## MAXIMUM RATINGS

DESIGN - MAXIMUM VALUES - SEE EIA STANDARD RS-239

	TRIODE SECTION	PENTODE SECTION	
PLATE VOLTAGE	300	300	VOLTS
GRID 2 SUPPLY VOLTAGE	-	300	VOLTS
GRID 2 VOLTAGE	-	SEE RATING CHART	
POSITIVE DC GRID 1 VOLTAGE	0	0	VOLTS
PLATE DISSIPATION	2.5	2.5	WATTS
GRID 2 DISSIPATION	-	0.55	WATTS
GRID 1 CIRCUIT RESISTANCE:			
WITH FIXED BIAS	2.2	2.2	MEGOHMS
WITH CATHODE BIAS	2.2	2.2	MEGOHMS

## AVERAGE CHARACTERISTICS AND TYPICAL OPERATION

	TRIODE SECTION	PENTODE SECTION	
PLATE VOLTAGE	125	125	VOLTS
GRID 2 VOLTAGE	-	125	VOLTS
GRID 1 VOLTAGE	-1.0	-1.0	VOLTS
PLATE CURRENT	13.5	12	mA
GRID 2 CURRENT	-	4.0	mA
TRANSCONDUCTANCE	8,500	7,500	$\mu$ MHOS
AMPLIFICATION FACTOR	46	-	
PLATE RESISTANCE	5,400	200,000	OHMS
GRID 1 VOLTAGE (APPROX.) FOR $I_b = 10 \mu A$	-8	-8	VOLTS

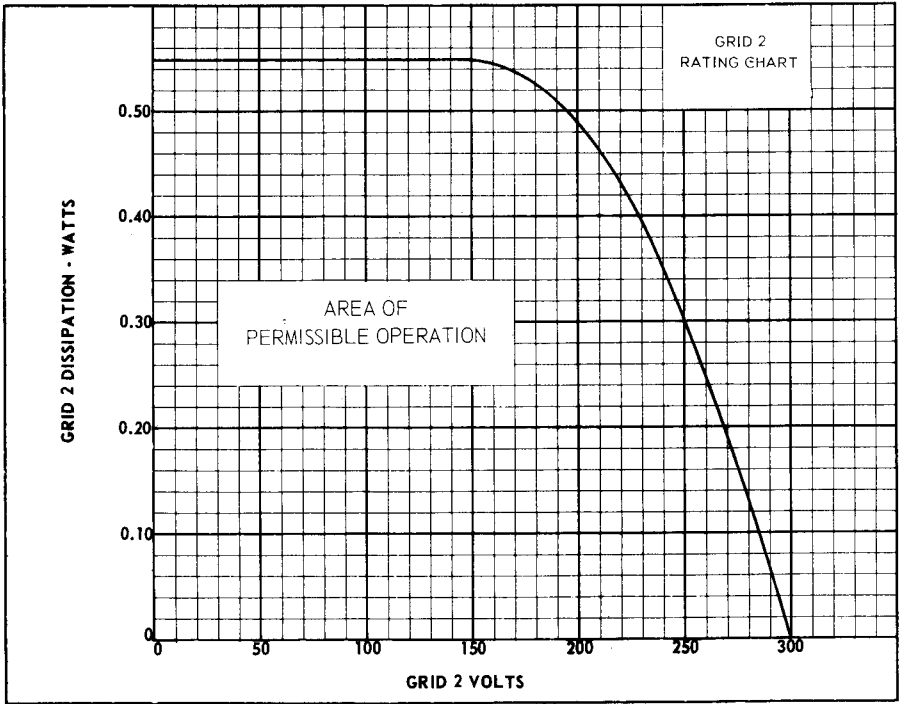

PRINTED IN U. S. A.